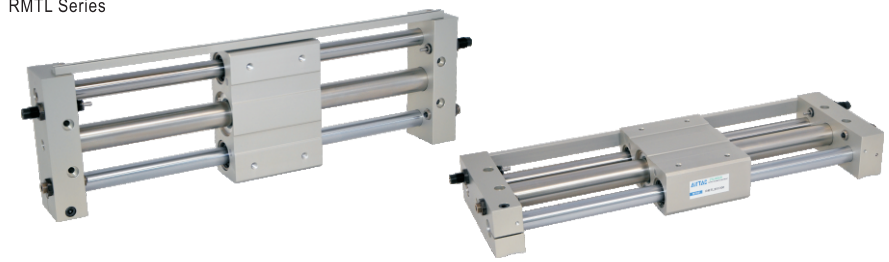


Rodless magnetic cylinder(With exactitude guide)——RMTL Series

Product series

Series name	Acting type	Bore size	Collocation of sensor switch	
			CS1-G	DS1-G
	Double acting	10		
		16		
		20		
		25	●	●
		32		
		40		
Page	366	419		

Installation and application

1. Dirty substances in the pipe must be eliminated before cylinder is connected with pipeline to prevent the entrance of impurities into the cylinder.
2. The medium used by cylinder shall be filtered to 40 μ m or below.
3. Anti-freezing measure shall be adopted under low temperature environment to prevent moisture freezing.
4. If the cylinder is dismantled and stored for a long time, pay attention to conduct anti-rust treatment to the surface. Anti-dust caps shall be added in air inlet and outlet ports.




Rodless magnetic cylinder(With exactitude guide)

RMTL Series



Symbol



Product feature

1. This magnetic cylinder is basically a pneumatic rodless cylinder featuring a mobile piston fitted with annular magnets. The mobile carriage is also equipped with magnets to provide magnetic coupling (carriage/piston). The carriage slide freely along the main tube.
2. It is dust-proof as the isolation between the carriage and piston.
3. It is compact in space.
4. The non adjustable rubber bumpers and the adjustable pneumatic cushioning on both ends of the cylinder ensure the smooth action. if shock absorber be used, the cushioning effect is more perfection.
5. Double guides ensure high precision and can endure proper side load or prejudicial load.



RMTL

Specification

Bore size (mm)	10	16	20	25	32	40
Acting type	Double acting					
Fluid	Air(to be filtered by 40 μm filter element)					
Operating pressure	0.18~0.7MPa(28~100psi)(1.8~7bar)					
Proof pressure	1.0MPa(145psi)(10.0bar)					
Temperature (°C)	-10~60					
Speed range (mm/s)	50~500					
Stroke tolerance (mm)	0~250 ^{+1.0} ₀		251~1000 ^{+1.4} ₀		1001~ ^{+1.8} ₀	
Cushion type	Fixed cushion			Shock absorber(Available)		
Safe holding force (N)	60	140	200	320	550	850
Port size ①	M5 × 0.8		1/8"		1/4"	

① PT thread, NPT and G thread are available. Add) Refer to P419~442 for detail of sensor switch.

Stroke

Bore size (mm)	Standard stroke (mm)											Max. stroke(mm)					
10	50	100	150	200	250	300						500					
16	50	100	150	200	250	300	350	400	450	500			750				
20	50	100	150	200	250	300	350	400	450	500	600	700	750	800	1000		
25	50	100	150	200	250	300	350	400	450	500	600	700	750	800	1500		
32	50	100	150	200	250	300	350	400	450	500	600	700	750	800	1500		
40	50	100	150	200	250	300	350	400	450	500	600	700	750	800	900	1000	1500

Note) Consult us for non-standard stroke.

Ordering code

RMTL 20 × 100 S

- Model**
RMTL: Rodless magnetic cylinder (With exactitude guide)
- Bore size**
10, 16, 20, 25, 32, 40
- Stroke**
Refer to stroke table for details
- Magnet**
 - Blank: Without magnet
 - S: With magnet
- Thread type**

Bore size	Thread type
10, 16	Blank: M5
20, 25	Blank: PT
32, 40	T: NPT G: G
- Cushion type**
 - Blank: With two adjustable nuts
 - A: With two shock absorbers

Note) When A type is selected, the two adjustable nuts are added too.

Rodless magnetic cylinder(With exactitude guide)

RMTL Series

Inner structure and material of major parts

NO.	Item	Material	NO.	Item	Material
1	Fixing plate	Aluminum alloy	24	C clip	Spring steel
2	Washer cover	Aluminum alloy	25	Barrel	Stainless steel
3	O-ring	NBR	26	Countersink screw	Carbon steel
4	O-ring	NBR	27	Guide I	Carbon steel
5	Nut	Carbon steel	28	Bumper	TPU
6	Joint pole	Stainless steel	29	Adjustable screw	Carbon steel
7	O-ring	NBR	30	Nut	SS41
8	Bumper	NBR	31	Fixing plate	Aluminum alloy
9	Piston seal	TPU	32	Shock absorber	Combination
10	O-ring	NBR	33	Spring washer	Spring steel
11	Scraping dust ring	Plastics	34	Countersink screw	Carbon steel
12	Wearing ring	Wear resistant material	35	Rail	Aluminum alloy
13	Piston	Aluminum alloy	36	Bumper block	Stainless steel
14	O-ring	NBR	37	Body	Aluminum alloy
15	Piston washer	Aluminum alloy	38	Bushing	
16	Magnet washer	Carbon steel	39	C clip	Spring steel
17	Magnet	Rare-earth material	40	Guide II	Carbon steel
18	Magnet washer	Carbon steel	41	Countersink screw	Carbon steel
19	Magnet	Rare-earth material	42	O-ring	NBR
20	Body cover	Aluminum alloy	43	Magnet	Rare-earth material
21	Wearing ring	Wear resistant material	44	Location washer	NBR
22	Mobility iron	Aluminum alloy	45	Steel ball	Stainless steel
23	Washer	Aluminum alloy			

Dimensions

Model	QW	Q	Z	PA	PB	L	W	TT	T	MM	B	C
RMTL10	26	85	111	30	60	68	77	20.5	20.5	M4X0.7Dp:8	8	4
RMTL16	30	90	122	45	70	75	92	22.5	22.5	M5X0.8Dp:10	9.5	5
RMTL20	40	105	139	50	90	86	117	25.5	25.5	M6X1.0Dp:10	9.5	5.2
RMTL25	50	105	139	60	100	86	127	25.5	25.5	M6X1.0Dp:10	11	6.5
RMTL32	60	121	159	70	120	100	157	28.5	28.5	M8X1.25Dp:12	14	8
RMTL40	84	159	209	90	140	136	187	35.5	35.5	M8X1.25Dp:12	14	8

Model	G1	H	HP	PW	GP	LD	D	d	(N1)	JK	P
RMTL10	7.5	34	33	80	52	4.3	11.18	10	16.5	M5X0.8Dp:9.5	M5X0.8
RMTL16	6.5	40	39	95	65	5.3	18	12	14.5	M6X1.0Dp:9.5	M5X0.8
RMTL20	8.5	46	45	120	80	5.3	22.8	16	21.5	M6X1.0Dp:10	1/8"
RMTL25	8.5	54	53	130	90	7	27.8	16	39.5	M8X1.25Dp:10	1/8"
RMTL32	9.5	66	64	160	110	8.7	35	20	57.5	M10X1.5Dp:15	1/8"
RMTL40	10.5	78	74	190	130	8.7	43	25	49.5	M10X1.5Dp:15	1/4"




RMTL

Rodless magnetic cylinder(With exactitude guide)

RMTL Series


Installation and application

1. Mounting type

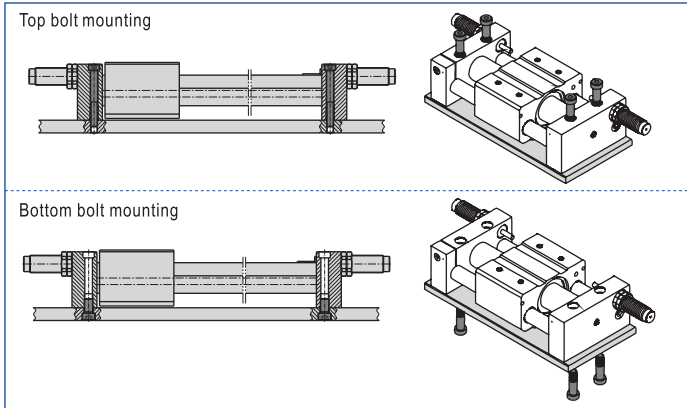


2. How to determine load

The maxi load to move must be less than the theoretical holding force.

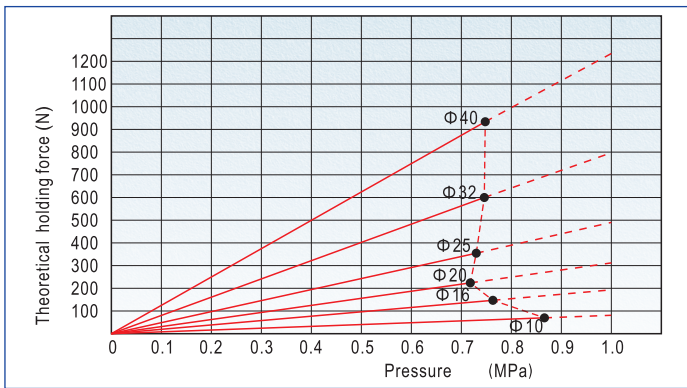

3. About shock absorber

- 3.1) Shock absorbers are consumable parts. When a decrease in energy absorption capacity is noticed, it must be replaced. Refer to the table below for shock absorber type.
- 3.2) Never loosen the bottom screw of the shock absorber. (It is not an adjustment screw.) That may cause oil leakage.
- 3.3) Refer to the table below for tightening torques of the shock absorber setting nut.

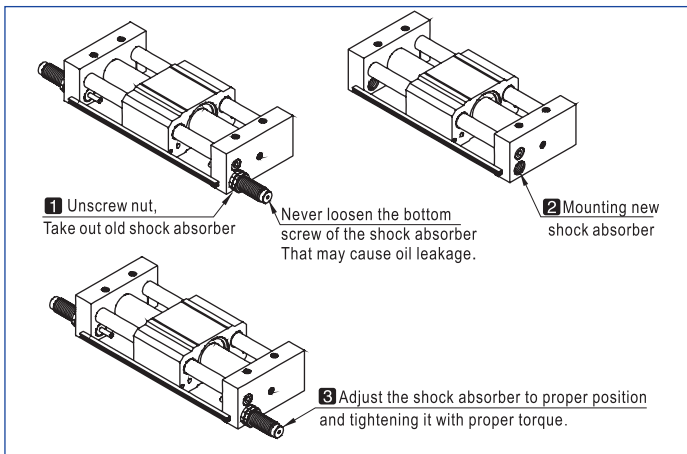


Bore size	10	16	20	25	32, 40
Shock absorber type	ACA0806-1N	ACA1006-A	ACA1007-1N	ACA1412-1N	ACA2020-1N
Tightening torque(Nm)	1.67	1.67	1.67	3.14	10.80

4. About sensor switch

- 4.1) Sensor switch only can be used for the cylinder with magnet. The magnet located the four corner of body's(refer below). The cylinder with magnet have both group mounting hole for mounting rail. please refer to below for ordering sensor switch, mounting it into the rail's groove, adjusting it to proper position, tightening it with proper torque.

Cylinder model	RMTL10	RMTL16	RMTL20	RMTL25	RMTL32	RMTL40
Sensor switch	CS1-G, CS1-GX, DS1-G, DS1-GN, DS1-GP					

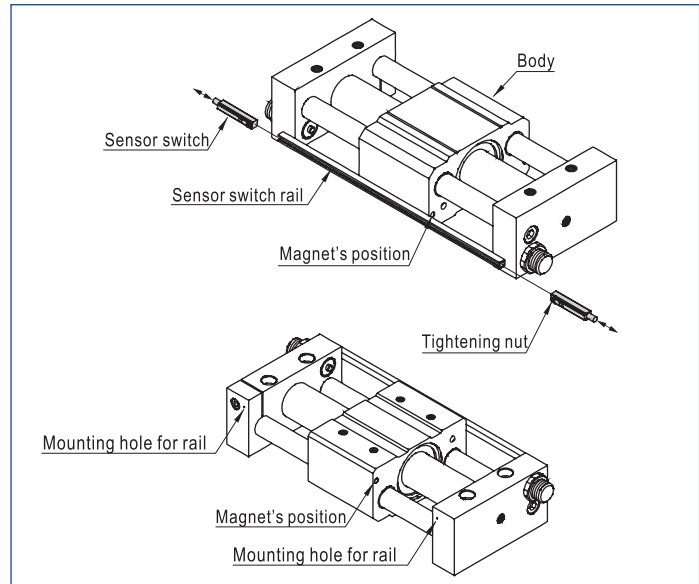

Add) Refer to Page 426, 436 for detail of sensor switch.

RMTL

