

Direct Operated 2 Port Solenoid Valve

Series VCA

For Air

Improved durability (Nearly twice the life of the previous series)

Resistance of moving parts has been reduced.
Service life and wear resistance are improved.

Large flow rate:

C value 1.1 to 7.7 dm³/(s·bar)


Built-in surge voltage suppressor

Built-in rectifying circuit (AC)


- Noise prevention • Burn-out prevention

Electrical entry directions

Electrical entry is available from four directions



* When shipped from our factory, the electrical entry is set in the IN port side.

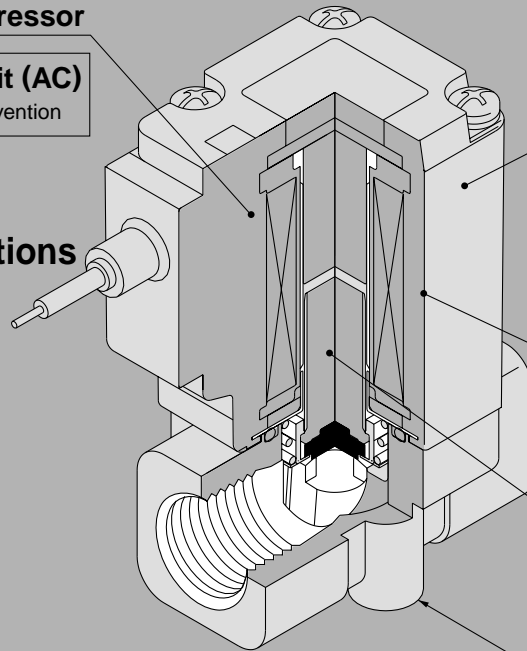

Compact and lightweight

New compact coil reduces the overall size and weight of the valve.

Flame resistant molded coil material

Flame resistance equivalent to UL94 standard V-0

Special construction reduces operating resistance.

Threaded for bottom mounting


Special bracket can be mounted.

A variety of wiring options


Grommet, DIN terminal,
Conduit, Conduit terminal

Wiring Specifications (Class B coil)


Wiring Variations




Grommet



DIN terminal



Conduit




Conduit terminal


Enclosure: Dusttight

Low jetproof (Equivalent to IP65)


Lined Up by Compact Design



VCA20
Class 2



VCA30
Class 3



VCA40
Class 4

VX2

VXD

VXZ

VXE

VXP

VXR

VXH

VXF

VX3

VXA

VCH□

VDW

VQ

LVM

VCA

VCB

VCL

VCS

VCW

Direct Operated 2 Port Solenoid Valve For Air

Series VCA



How to Order Valves (Single Unit)

VC A 2 1 **- 1 G** **- 3 - 02** **-** **-** **-**

For air

Series

2	Class 2
3	Class 3
4	Class 4

Valve type

1	N.C.
---	------

Fluid

Nil	General air
A	Dry air

Voltage

1	100 VAC
2	200 VAC
3	110 VAC
4	220 VAC
5	24 VDC
6	12 VDC
7	240 VAC
8	48 VAC
J	230 VAC

* Please consult with SMC regarding other voltages.

Option

Nil	None
F	Foot type bracket

* Bracket is packed in the same container as the main body. Refer to the table (2) if a bracket is ordered separately.

Thread type (for single unit only)

Nil	Rc
F	G
N	NPT
T	NPTF

Port size

Symbol	Port size	Class 2	Class 3	Class 4
02	1/4 (8A)	○	○	—
03	3/8(10A)	—	○	○
04	1/2(15A)	—	—	○
06	3/4(20A)	—	—	○

Orifice size

Symbol	Orifice dia. (mmø)	Class 2	Class 3	Class 4
3	3	○	—	—
4	4	—	○	—
5	5	○	—	○
7	7	—	○	○
10	10	—	—	○

* Refer to the below table for orifice and port size combinations.

Manual override

Nil	None
B	Slotted locking type (Tool required)

Electrical entry

G – Grommet	C – Conduit
T – Conduit terminal TL – Conduit terminal with indicator light	D – DIN terminal DL – DIN terminal with indicator light DO – DIN terminal (without connector, with gasket)

Connector

Manual override

Nil	None
B	Slotted locking type (Tool required)

Table (1) Orifice diameter and Port Size Combinations

Class	Port size	Orifice diameter (mmø)				
		3	4	5	7	10
2	1/4 (8A)	●	—	●	—	—
	3/8 (10A)	—	●	—	●	—
3	1/4 (8A)	—	●	—	●	—
	3/8 (10A)	—	●	—	●	—
	1/2 (15A)	—	—	●	●	●
4	1/2 (15A)	—	—	●	●	●
	3/4 (20A)	—	—	—	—	●

Table (2) Bracket Assembly Part No.

Valve model	Bracket assembly part no.
VCA21	VCA20-12-1A
VCA31	VCA30-12-1A
VCA41	VCA40-12-1A

* All types are equipped with surge voltage suppressor.

* Mounting screws (2 pcs.)

Standard Specifications



Valve specifications	Valve construction	Direct operated poppet	
	Fluid	Air, Inert gas, Low vacuum (133 Pa-abs)	
	Withstand pressure (MPa)	2.0	
	Body material	Al	
	Seal material	HNBR	
	Ambient temperature (°C)	-20 to 60	
	Fluid temperature (°C)	-10 to 60 (No freezing)	
	Enclosure	Dusttight, low jetproof (equivalent to IP65)	
	Environment	Location without corrosive or explosive gases	
	Valve leakage (cm³/min) (ANR)	0.2 or less	
	Exterior leakage (cm³/min) (ANR)	0.2 or less	
	Mounting orientation	Unrestricted	
Vibration/Impact resistance (m/s²) <small>Note 2)</small>	30/150 or less		
Coil specifications	Rated voltage	24 VDC, 12 VDC, 100 VAC, 110 VAC, 200 VAC, 220 VAC, 230 VAC (50/60 Hz)	
	Allowable voltage fluctuation	±10% of rated voltage	
	Coil insulation type	Class B	
	Power consumption DC	VCA 2: 6.5 W, VCA 3: 8 W, VCA 4: 11.5 W	
	Apparent power	<small>Note 1)</small> AC	50 Hz
60 Hz			



Note 1) Since AC coil uses a rectifying circuit, there is no difference in apparent power between inrush and holding.
 Note 2) Vibration resistance Conditions when tested with one sweep of 10 to 300 Hz in the axial direction and at a right angle to the armature, in both energized and deenergized states. No malfunction occurred when tested. (Value at initial state)
 Impact resistance Conditions when tested with a drop tester in the axial direction and at a right angle to the armature, one time each in energized and deenergized states. No malfunction occurred when tested. (Value at the initial state).

Characteristic Specifications

Model	Class	Port size	Orifice diameter (mmφ)	Max. operating pressure differential (MPa)	Flow characteristics			Max. operating pressure (MPa)	<small>Note 1)</small> Mass (kg)
					C [dm³/(s·bar)]	b	Cv		
VCA (for air) 2 port solenoid valve	2	1/4 (8A)	3	1.0	1.1	0.45	0.29	1.0	0.21
			5	0.15	2.9	0.21	0.68		
	3	1/4 (8A) 3/8 (10A)	4	1.0	1.9	0.24	0.45	1.0	0.30
			7	0.15	5.0	0.16	1.2		
			5	1.0	3.0	0.35	0.78		
	4	1/2 (15A) 3/4 (20A)	7	0.3	5.4	0.27	1.4	1.0	0.50
			10	0.15	7.7	0.23	1.9		



Note 1) Mass values are for the grommet type.

Made to Order Specifications



Oil-free specifications

VCA²₃1A-□□-□-□□□-□-□-□-**X15**
4

Note) Please consult with SMC when using. Not available for manual operation.

Normally open (N.O.) specifications

VCW²₃2-□□□□-□-□□□-□□□-□□□-**X43**
4



Note) Fluid: Air. Refer to VCW for model numbers and characteristics.

Non-leak (10⁻⁶ Pa·m³/sec), vacuum (0.1 Pa-abs) specifications


VCW²₃□-□□□-□-□□□□-^AL-□□-□□□-**X35**
4

Note) Refer to VCW for characteristic specifications and models.

Coil orientation variations

VCA²₃1□-□□□□-□-□□□□-□-□□□□-□-□□□□-□-□□□□-□-□□□□-□-□□□□-□-□□□□-□
4

X23	Rotated 180°
X64	Rotated 90°
X65	Rotated 270°



VX2

VXD

VXZ

VXE

VXP

VXR

VXH

VXF

VX3

VXA

VCH□

VDW

VQ

LVM

VCA

VCB


VCL

VCS

VCW

Series VCA


Construction

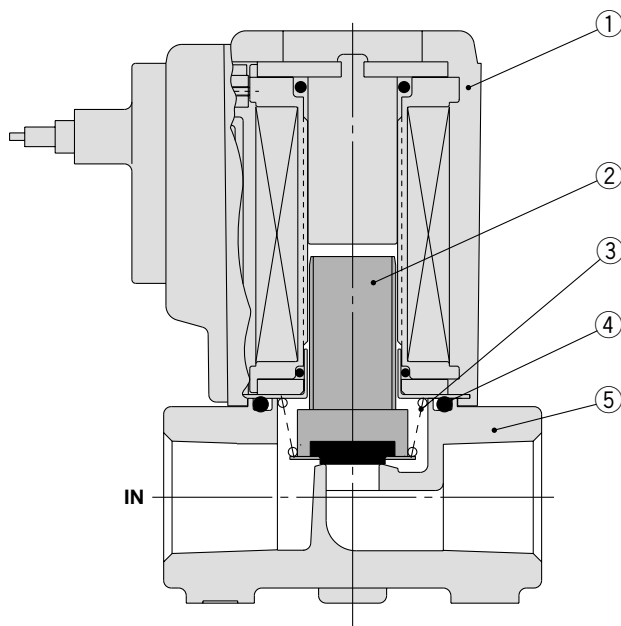

Component Parts

No.	Description	Material
1	Solenoid coil	—
2	Armature assembly	Stainless steel, HNBR, PPS
3	Return spring	Stainless steel
4	O-ring	HNBR
5	Body	Aluminum

Bracket Assembly Dimensions

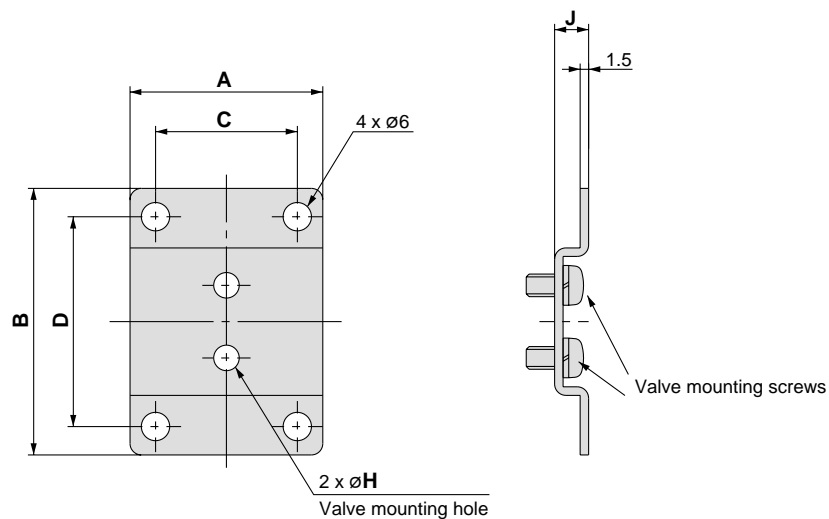


Bracket Mounting Dimensions/Bracket Material: Stainless Steel (mm)

Assembly part no.	A	B	C	D	H	J
VCA20-12-1A	41	52	30	40	4.5	6
VCA30-12-1A	48	56	36	44	5.5	7
VCA40-12-1A	50	62	38	50	5.5	7


* 2 mounting screws (for mounting brackets) are included in bracket part no.

Dimensions


Grommet: G

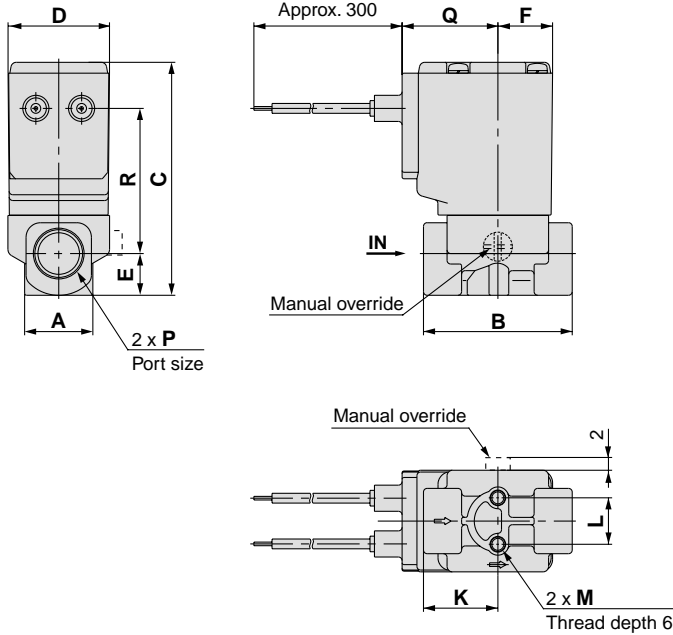


Conduit: C

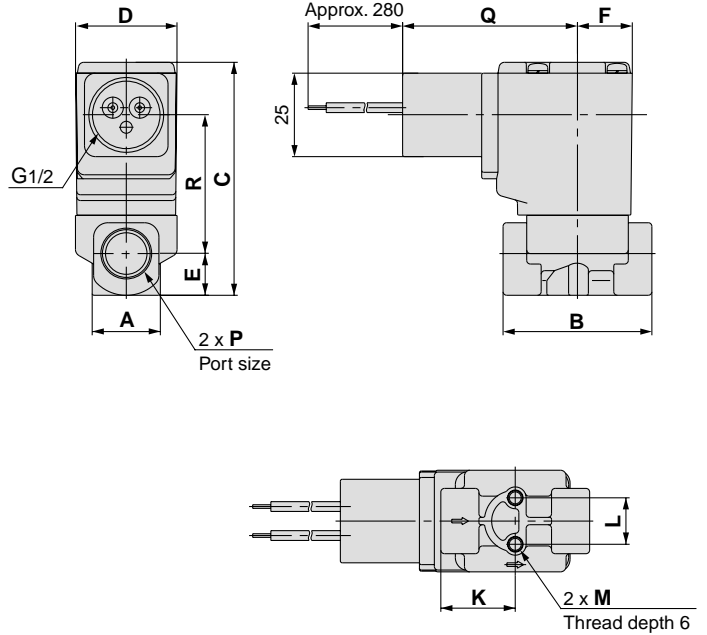

DIN terminal: D

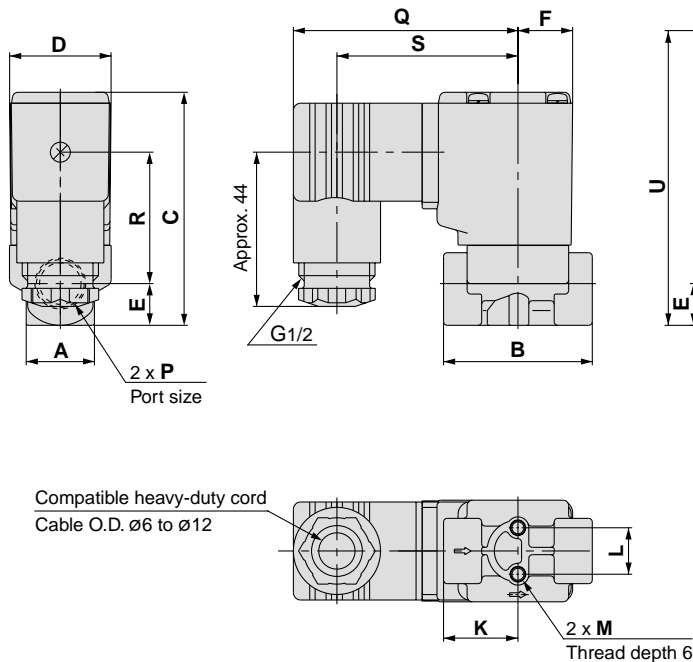

Conduit terminal: T

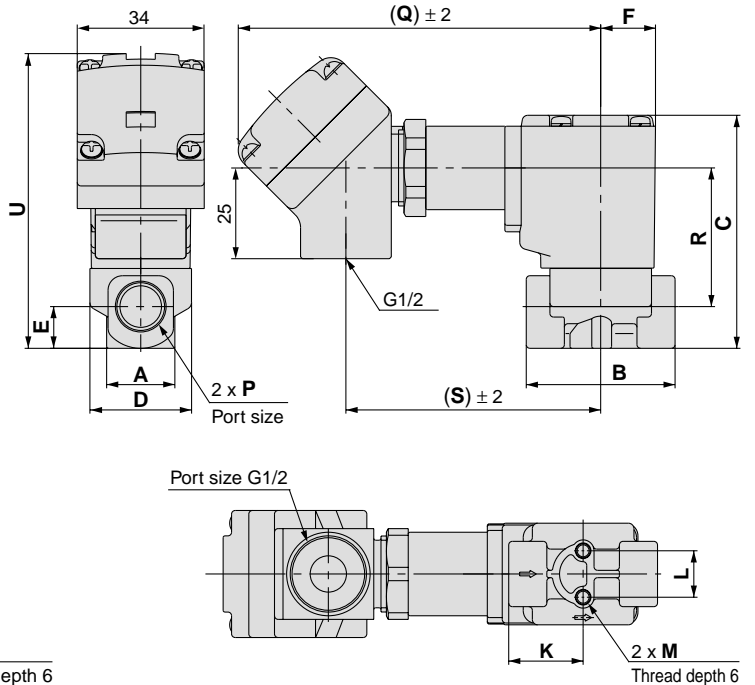

- VX2
- VXD
- VXZ
- VXE
- VXP
- VXR
- VXH
- VXF
- VX3
- VXA
- VCH
- VDW
- VQ
- LVM
- VCA**
- VCB
- VCL
- VCS
- VCW

Model	P Port size	A	B	C	D	E	F	K	L	M	Electrical entry										
											Grommet: G		Conduit: C		DIN terminal: D			Conduit terminal: T			
											Q	R	Q	R	Q	R	S	Q	R	S	U
VCA21	1/4	18	41	64	28	11.5	15	20.5	12.8	M4	27	40	46	36	63	35	51	98	36	68	81
VCA31	1/4, 3/8	24	50	76	34	14	17	25	19	M5	30	48	50	44	66	42	54	101	44	71	91.5
VCA41	3/8, 1/2	30	60	86	40	15	20	30	23	M5	32	56	52	53	69	51	57	104	53	74	101
	3/4	35	68	91	40	17.5	20	34	23	M5	32	58.5	52	55.5	69	53.5	57	104	55.5	74	103.5

Series VCA

How to Order Manifold (VCA20)

VV2C A 2 - 02 02 [] - [] - []

For air ●

Series ●

2	Class 2
---	---------

Stations ●

02	2 stations
⋮	⋮
10	10 stations

OUT port size ●

02	1/4 (8A)
----	----------

Thread type ●


Nil	Rc
F	G
N	NPT
T	NPTF

Electrical entry ●

Nil	Grommet, Conduit, DIN
T	Conduit terminal

IN port direction ●

Nil	Side
A	Front



How to Order Manifold Assembly


Enter the mounting valve and option part numbers under the manifold base part number.

<Ordering Example>

VV2CA2-0502 1 set Manifold part no.
 * VCA23-5G-3 5 sets Valve part no.
 (Stations 1 to 5)

"*" is the symbol for assembly. Add an "*" in front of the part numbers for solenoid valves, etc., to be mounted.

Enter together in order, counting from station 1 on the D side.

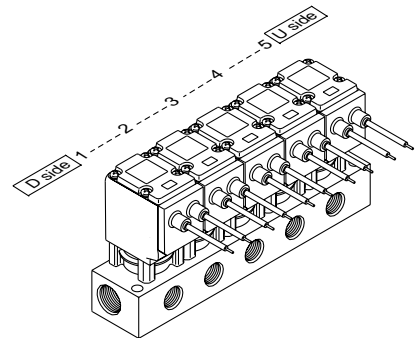

How to Order Valves (VCA20)

VC A 2 3 [] - **1 G** [] - **3**

For air ●

Series ●

2	Class 2
---	---------

Valve type ●

3	N.C. for manifold
---	-------------------

Fluid ●

Nil	General air
A	Dry air

Voltage ●

1	100 VAC
2	200 VAC
3	110 VAC
4	220 VAC
5	24 VDC
6	12 VDC
7	240 VAC
8	48 VAC
J	230 VAC

Orifice size ●

Symbol	Orifice dia. (mmØ)
3	3
5	5

Manual override ●

Nil	None
B	Slotted locking type (tool required)


Electrical entry ●

G	Grommet
C	Conduit
T	Conduit terminal
TL	Conduit terminal with indicator light
D	DIN terminal
DL	DIN terminal with indicator light
DO	DIN terminal (without connector, with gasket)

* All types equipped with surge voltage suppressor.

* Please consult with SMC regarding other voltages.

How to Order Manifold (VCA30/40)

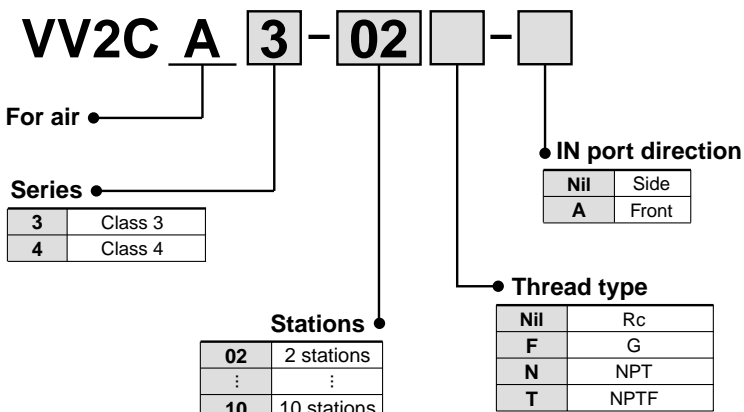

How to Order Manifold Assembly


Enter the mounting valve and option part numbers under the manifold base part number.

<Ordering Example>


VV2CA3-05 1 set Manifold part no.
 * VCA35-5G-4-03 5 sets Valve part no.
 (Stations 1 to 5)

"*" is the symbol for assembly. Add an "*" in front of the part numbers for solenoid valves, etc., to be mounted.

Enter together in order, counting from station 1 on the D side.

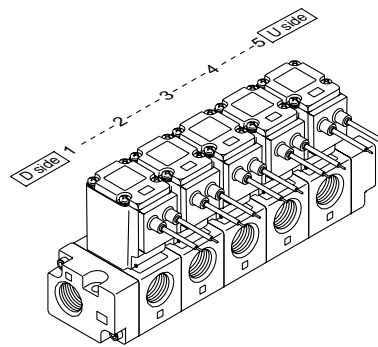

How to Order Valves (VCA30/40)

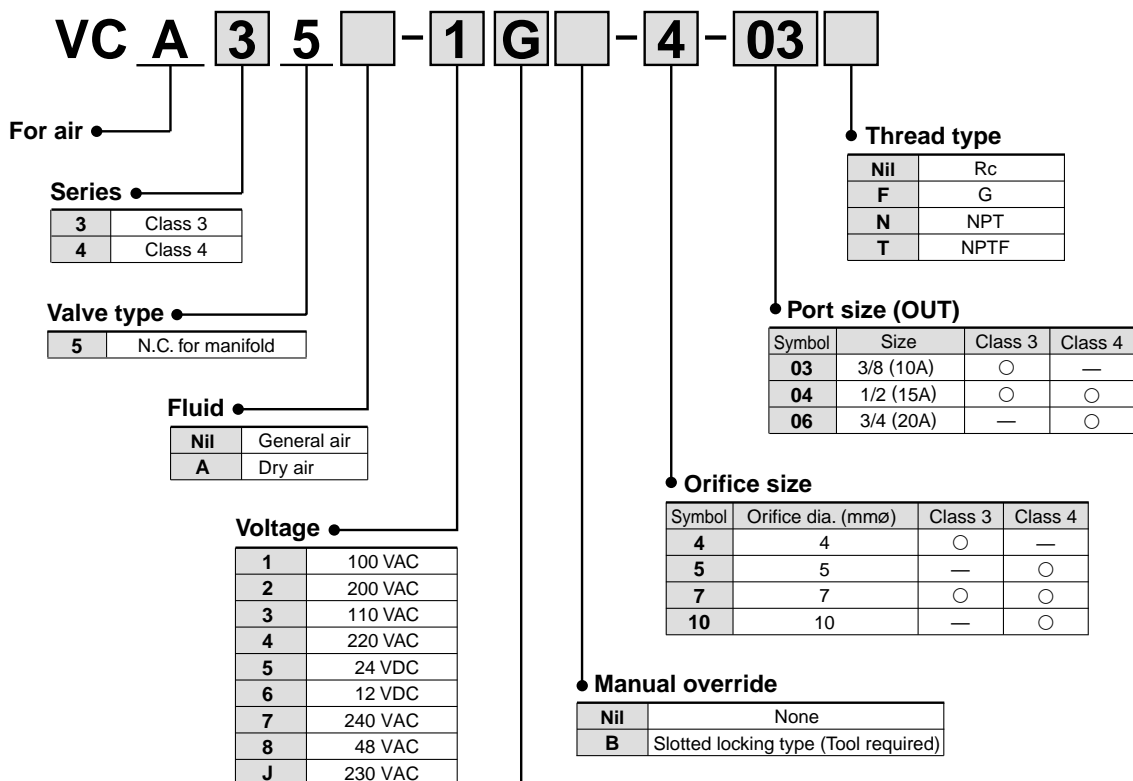

* Please consult with SMC regarding other voltages.

● **Electrical entry**

G	Grommet
C	Conduit
T	Conduit terminal
TL	Conduit terminal with indicator light
D	DIN terminal
DL	DIN terminal with indicator light
DO	DIN terminal (without connector, with gasket)

* All types equipped with surge voltage suppressor.

VX2

VXD

VXZ

VXE

VXP

VXR

VXH

VXF

VX3

VXA

VCH□

VDW

VQ

LVM

VCA

VCB




VCL

VCS

VCW

Series VCA

Dimensions: VCA20 Manifold

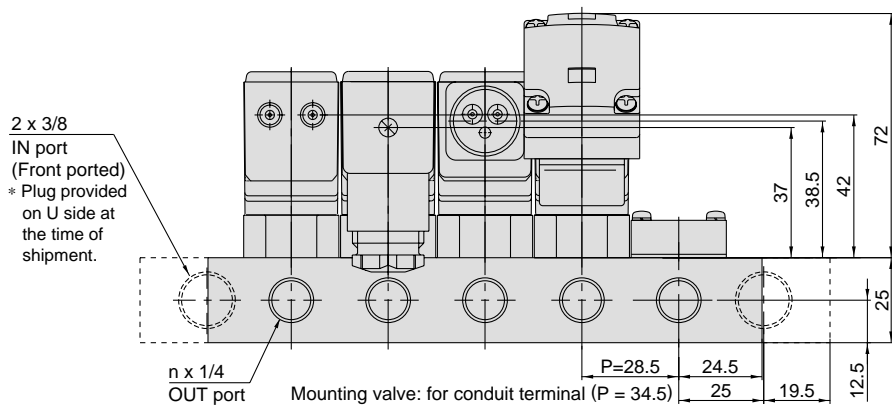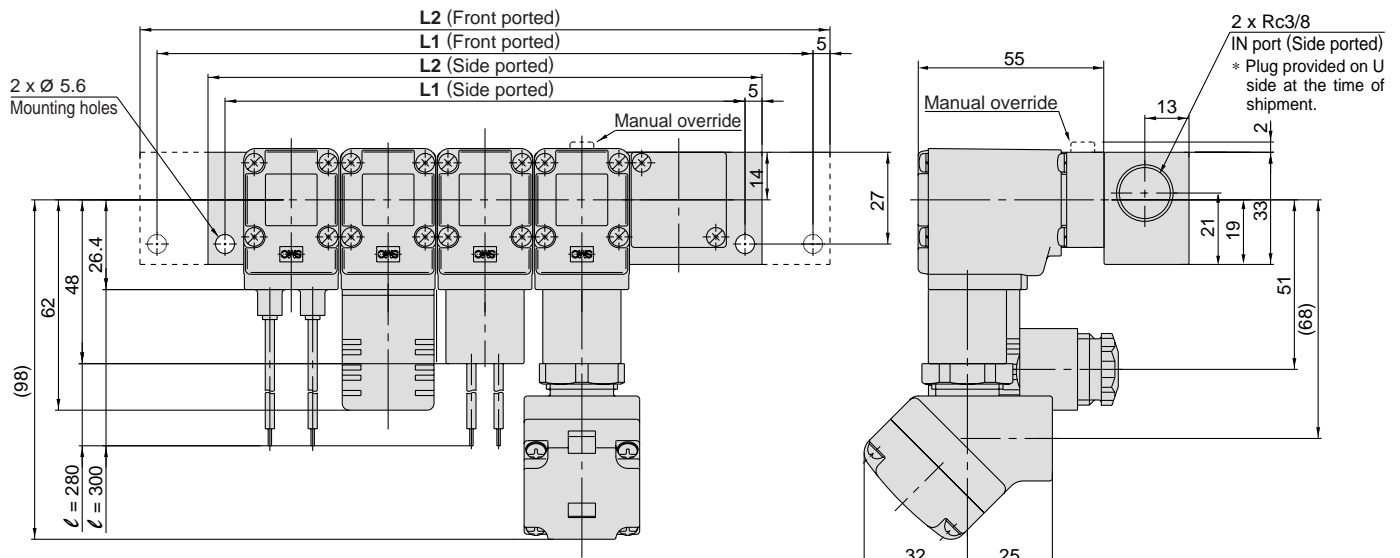

Dimensions Side ported: L1 = n x 28.5 + 10.5 L2 = n x 28.5 + 20.5
 Front ported: L1 = n x 28.5 + 50.5 L2 = n x 28.5 + 60.5 (mm)



IN port direction	n	2	3	4	5	6	7	8	9	10
Side ported	L1	67.5	96	124.5	153	181.5	210	238.5	267	295.5
	L2	77.5	106	134.5	163	191.5	220	248.5	277	305.5
Front ported	L1	107.5	136	164.5	193	221.5	250	278.5	307	335.5
	L2	117.5	146	174.5	203	231.5	260	288.5	317	345.5

(When the electrical entry of a valve to be mounted is conduit terminal.)

Dimensions Side ported: L1 = n x 34.5 + 4.5 L2 = n x 34.5 + 14.5
 Front ported: L1 = n x 34.5 + 44.5 L2 = n x 34.5 + 54.5 (mm)

IN port direction	n	2	3	4	5	6	7	8	9	10
Side ported	L1	73.5	108	142.5	177	211.5	246	280.5	315	349.5
	L2	83.5	118	152.5	187	221.5	256	290.5	325	359.5
Front ported	L1	113.5	148	182.5	217	251.5	286	320.5	355	389.5
	L2	123.5	158	192.5	227	261.5	296	330.5	365	399.5

Dimensions: VCA30/40 Manifold

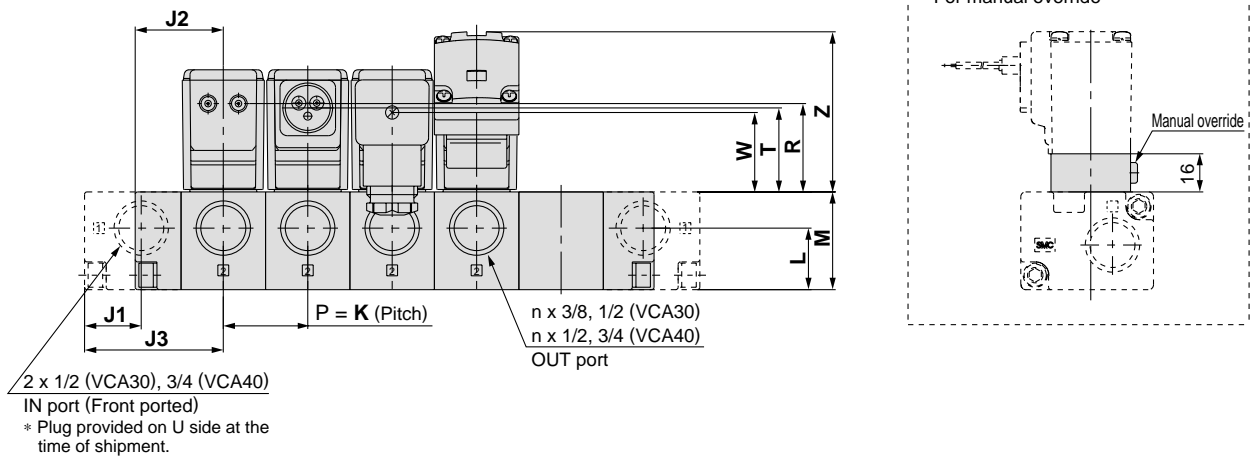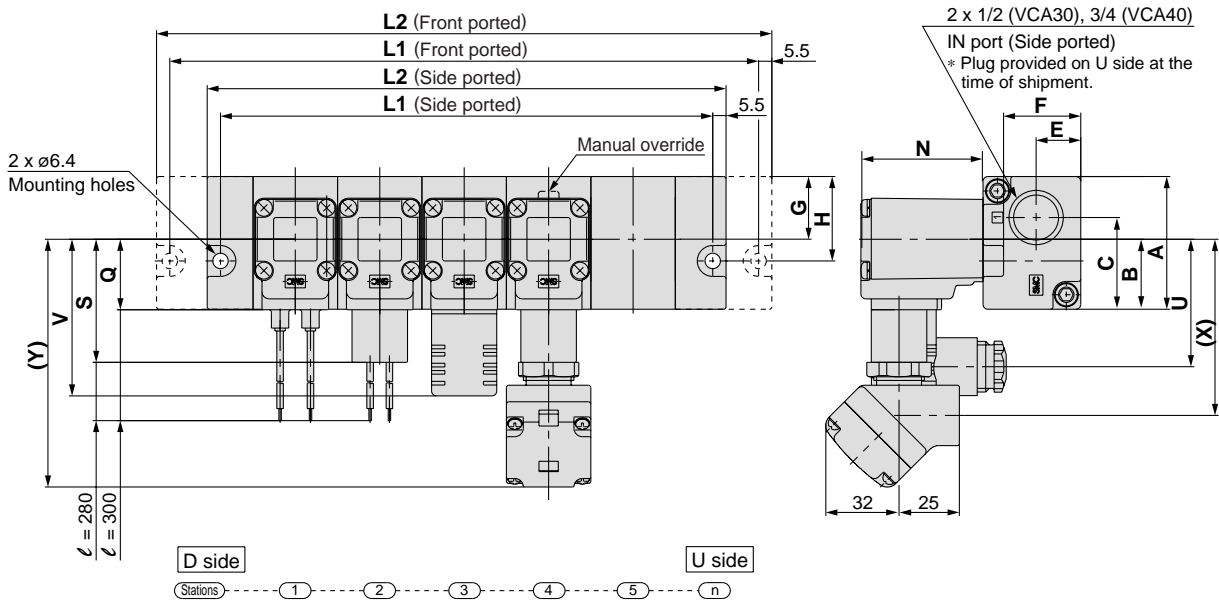

L Dimension

Model	IN port direction	Dimensions	n (stations)									
			2	3	4	5	6	7	8	9	10	
VV2CA3	Side ported	L1	103	138	173	208	243	278	313	348	383	
		L2	114	149	184	219	254	289	324	359	394	
	Front ported	L1	139	174	209	244	279	314	349	384	419	
		L2	150	185	220	255	290	325	360	395	430	
VV2CA4	Side ported	L1	117	158	199	240	281	322	363	404	445	
		L2	128	169	210	251	292	333	374	415	456	
	Front ported	L1	161	202	243	284	325	366	407	448	489	
		L2	172	213	254	295	336	377	418	459	500	

(mm)

Formulas
VV2CA3
Side ported: $L1 = n \times 35 + 33$, $L2 = n \times 35 + 44$
Front ported: $L1 = n \times 35 + 69$, $L2 = n \times 35 + 80$
VV2CA4
Side ported: $L1 = n \times 41 + 35$, $L2 = n \times 41 + 46$
Front ported: $L1 = n \times 41 + 79$, $L2 = n \times 41 + 90$

Dimensions

Model	A	B	C	E	F	G	H	J1	J2	J3	K	L	M	N	Electrical entry									
															Grommet: G		Conduit: C		DIN terminal: D		Conduit terminal: T			
															Q	R	S	T	U	V	W	X	Y	Z
VV2CA3	55	29	38	19.5	33	26	35	23.5	39.5	57.5	35	26.5	41.5	50	30	36	50	32	54	66	30	71	101	65.5
VV2CA4	62	31	43	21	39.5	31	43	27	43.5	65.5	41	29	48	55	32	41	52	38	57	69	36	74	104	71



(mm)

- VX2
- VXD
- VXZ
- VXE
- VXP
- VXR
- VXH
- VXF
- VX3
- VXA
- VCH
- VDW
- VQ
- LVM
- VCA**
- VCB
- VCL
- VCS
- VCW

Series VCA

Manifold Exploded View

Series VCA20

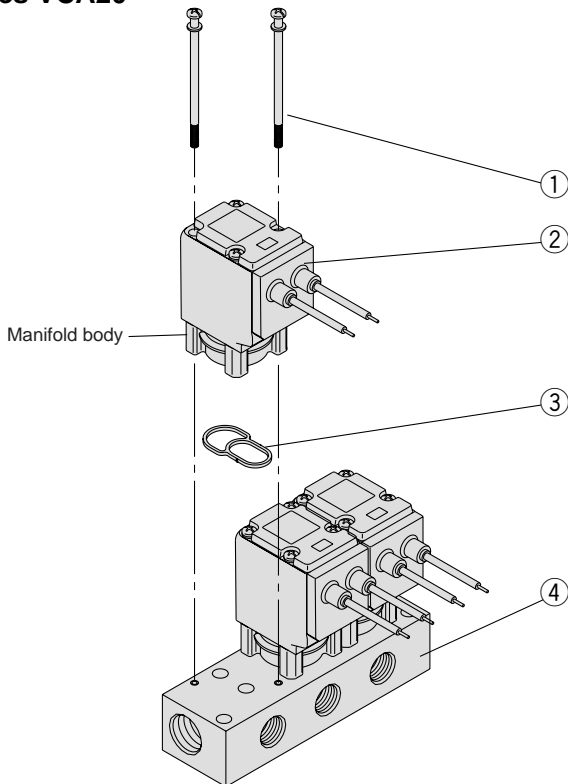


Manifold base OUT port side

Mounting orientation exists when mounting valves onto manifold base. Mount it as shown above.

No.	Part no.	Description	Material
1	M3 x 57	Cross-recessed head machine screw	Steel
2	VCA23□-□□□-□	Valve for manifold ^{Note 1)}	
3	VVCA20-3-1	Gasket	HNBR
4	VV2CA2-□□□-□	Manifold base	Aluminum

Note 1) Gasket (3) is included with manifold valve (2).

Series VCA30/40

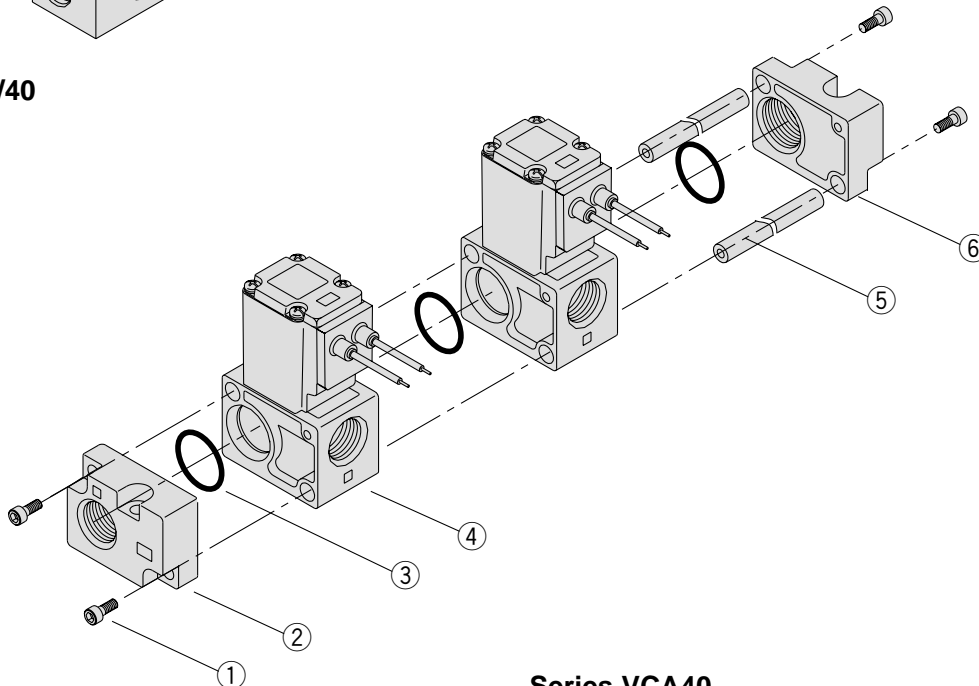

Series VCA30

No.	Part no.	Description	Material
1	AXT632-69-1	Mounting screw (side port)	Steel
	AXT632-69-2	Mounting screw (front port)	
2	VVCA30-3A-04-2	End plate assembly (D side, side port)	Aluminum
	VVCA30-3A-04-1	End plate assembly (D side, front port)	
3	OR-2200-200-H	O-ring (for VCA30)	HNBR
4	VCA35□-□□-□-□□	Manifold valve ^{Note 2)}	
5	VVCA30-6-n	Tie-rod	Steel
6	VVCA30-4A-04-2	End plate assembly (U side, side port)	Aluminum
	VVCA30-4A-04-1	End plate assembly (U side, front port)	

Note 2) O-ring (3) is included with manifold valve (4).

Series VCA40

No.	Part no.	Description	Material
1	AXT632-69-1	Mounting screw (side port)	Steel
	AXT632-69-2	Mounting screw (front port)	
2	VVCA40-3A-06-2	End plate assembly (D side, side port)	Aluminum
	VVCA40-3A-06-1	End plate assembly (D side, front port)	
3	OR-3200-200-H	O-ring (for VCA40)	HNBR
4	VCA45□-□□-□-□□	Manifold valve ^{Note 2)}	
5	VVCA40-6-n	Tie-rod	Steel
6	VVCA40-4A-06-2	End plate assembly (U side, side port)	Aluminum
	VVCA40-4A-06-1	End plate assembly (U side, front port)	


Note 2) O-ring (3) is included with manifold valve (4).

Manifold Option Parts

Blanking plate assembly (VCA20)

VVCA20 - 4A

This is used when a blanking plate is mounted on a manifold as preparation for a planned valve installation. (With gasket, 2 mounting screws)




Blanking block assembly (VCA30, 40)

VVCA 3 0 - 2A - 00

3	Series VCA30
4	Series VCA40

This is used when a blanking plate is mounted on a manifold as preparation for a planned valve installation. (With O-ring)




Tie-rod for additional stations (Set of 2 pcs for 1 station) (VCA30, 40)

VVCA 3 0 - 6 - 1A

3	Series VCA30
4	Series VCA40

Mounted on the tie-rod when adding one station.



VX2

VXD

VXZ

VXE

VXP

VXR

VXH

VXF

VX3

VXA

VCH□

VDW

VQ

LVM

VCA

VCB

VCL

VCS

VCW