


# Direct Operated 2 Port Solenoid Valve

## Series VX21/22/23

For Air, Water, Oil, Steam

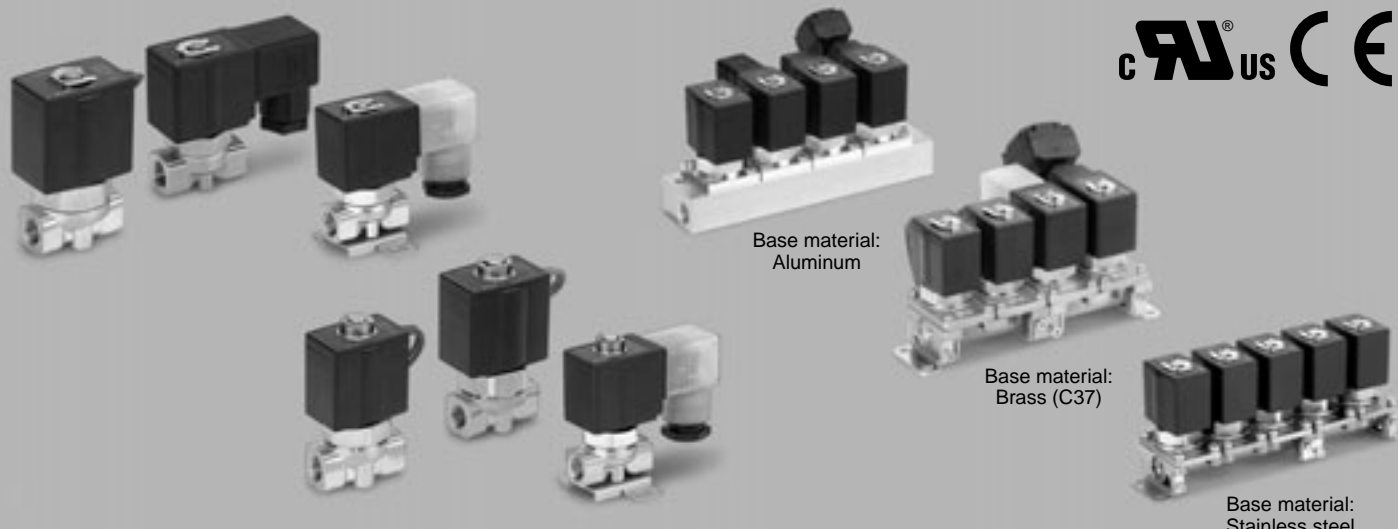

Solenoid valves for various fluids used in a wide variety of applications

**Improved corrosion resistance**

Special magnetic material adopted

**Enclosure: IP65**

**Flame resistance UL94V-0 conformed**

Flame resistant mold coil material

**Low-noise construction**

Special construction enables to reduce the metal noise. (DC spec.)

**Improved maintenance performance**

Maintenance is performed easily due to the threaded assembly.

**Reduced power consumption (DC spec.)**

VX21: 6 W → **4.5 W**


VX22: 8 W → **7 W**

VX23: 11.5 W → **10.5 W**

**Energy saving type: 0.8 W**  
(Held at 24 VDC)


**With mounting threads on the bottom**

A dedicated bracket is available.

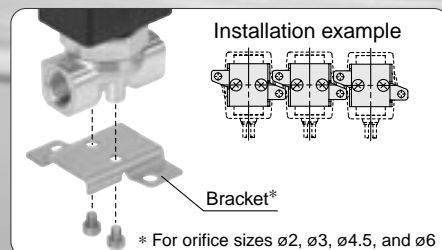

**Built-in full-wave rectifier type**

**Built-in full-wave rectifier**



**Improved durability (SMC comparison: approx. double the service life)**  
Service life is extended by the special construction.

**Reduced buzz noise**

Rectified to DC by the full-wave rectifier, resulting in a substantial buzz noise reduction.

**Reduced apparent power (standard product: comparison with shading coil type)**

VX21: 10 VA → **7 VA**

VX22: 20 VA → **9.5 VA**

VX23: 32 VA → **12 VA**

**Improved OFF response**

Specially constructed to improve the OFF response when operated with a higher viscosity fluid such as oil.

**Low-noise construction**

Specially constructed to reduce the metal noise during operation.

VX2

VXD

VXZ

VXE

VXP

VXR

VXH

VXF

VX3

VXA

VCH□

VDW

VQ

LVM

VCA

VCB

VCL

VCS

VCW



# Direct Operated 2 Port Solenoid Valve

## Series VX21/22/23

For Air, Water, Oil, Steam



### Single Unit

#### Valve

Normally closed (N.C.)  
Normally open (N.O.)

#### Solenoid Coil

Coil: Class B, Class H

#### Rated Voltage

100 VAC, 200 VAC, 110 VAC,  
220 VAC, 240 VAC, 230 VAC,  
48 VAC, 24 VDC, 12 VDC

#### Material

Body — Brass (C37), Stainless steel  
Seal — NBR, FKM, EPDM, PTFE

#### Electrical Entry

- Grommet
- Conduit
- DIN terminal
- Conduit terminal




#### Normally Closed (N.C.)

| Model            | VX21       | VX22       | VX23              |
|------------------|------------|------------|-------------------|
| Orifice diameter |            |            |                   |
| 2 mmø            | ●          | —          | —                 |
| 3 mmø            | ●          | ●          | —                 |
| 4.5 mmø          | ●          | ●          | ●                 |
| 6 mmø            | —          | ●          | ●                 |
| 8 mmø            | —          | ●          | ●                 |
| 10 mmø           | —          | ●          | ●                 |
| Port size        | 1/8<br>1/4 | 1/4<br>3/8 | 1/2<br>3/8<br>1/2 |

#### Normally Open (N.O.)

| Model            | VX21       | VX22       | VX23       |
|------------------|------------|------------|------------|
| Orifice diameter |            |            |            |
| 2 mmø            | ●          | —          | —          |
| 3 mmø            | ●          | ●          | ●          |
| 4.5 mmø          | ●          | ●          | ●          |
| 6 mmø            | —          | ●          | ●          |
| Port size        | 1/8<br>1/4 | 1/4<br>3/8 | 1/4<br>3/8 |



### Manifold

#### Valve

Normally closed (N.C.)  
Normally open (N.O.)

#### Base

Common SUP type, Individual SUP  
type (Base material Aluminum only)

#### Solenoid Coil

Coil: Class B, Class H

#### Rated Voltage


100 VAC, 200 VAC, 110 VAC,  
220 VAC, 240 VAC, 230 VAC,  
48 VAC, 24 VDC, 12 VDC

#### Material

Body — Aluminum, Brass (C37), Stainless steel  
Base — Aluminum, Brass (C37), Stainless steel  
Seal — NBR, FKM, EPDM, PTFE

#### Electrical Entry

- Grommet
- Conduit
- DIN terminal
- Conduit terminal

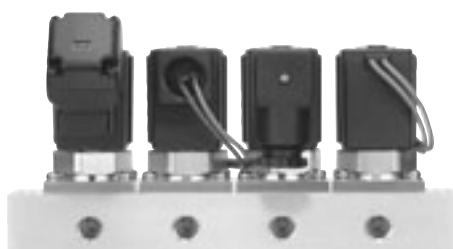

#### Manifold

| Model                          | VX21     | VX22 | VX23 |
|--------------------------------|----------|------|------|
| Orifice diameter               |          |      |      |
| 2 mmø                          | ●        | —    | —    |
| 3 mmø                          | ●        | ●    | ●    |
| 4.5 mmø                        | ●        | ●    | ●    |
| 6 mmø                          | —        | ●    | ●    |
| (Common SUP type)<br>Port size | 3/8      |      |      |
| OUT port                       | 1/8, 1/4 |      |      |

VX2

VXD

VXZ

VXE

VXP

VXR

VXH

VXF

VX3

VXA

VCH□

VDW

VQ

LVM

VCA

VCB

VCL

VCS

VCW

# Common Specifications

## Standard Specifications

| Valve specifications | Valve construction            |   | Direct operated poppet                                       |
|----------------------|-------------------------------|---|--|
|                      | Withstand pressure            | MPa   | 5.0  |
|                      | Body material                 | Brass (C37), Stainless steel                                  |  |
|                      | Seal material                 | NBR, FKM, EPDM, PTFE  |  |
|                      | Enclosure                     | Dusttight, Low jetproof (equivalent to IP65) <sup>Note)</sup> |  |
|                      | Environment                   | Location without corrosive or explosive gases                 |  |
| Coil specifications  | Rated voltage                 | AC  | 100 VAC, 200 VAC, 110 VAC, 220 VAC, 230 VAC, 240 VAC, 48 VAC |
|                      |                               | DC  | 24 VDC, 12 VDC   |
|                      | Allowable voltage fluctuation |   | ±10% of rated voltage  |
|                      | Allowable leakage voltage     | AC (Class B coil, Built-in full-wave rectifier type)          | 10% or less of rated voltage                                 |
|                      |                               | AC (Class B coil/H coil)                                      | 20% or less of rated voltage                                 |
|                      |                               | DC (Class B coil only)  | 2% or less of rated voltage                                  |
|                      | Coil insulation type          |   | Class B, Class H   |

\* Electrical entry: Grommet with surge voltage suppressor (GS) has a rating of IP40.

## Solenoid Coil Specifications

### Normally Closed (N.C.)

#### DC Specification

| Model | Power consumption (W) | Temperature rise (C°) <sup>Note)</sup> |
|-------|-----------------------|--|
| VX21  | 4.5                   | 45                                     |
| VX22  | 7                     | 45                                     |
| VX23  | 10.5                  | 60                                     |

#### AC Specification (Class B coil, Built-in full-wave rectifier type)

| Model | Apparent power (VA)* | Temperature rise (C°) <sup>Note)</sup> |
|-------|----------------------|--|
| VX21  | 7                    | 55                                     |
| VX22  | 9.5                  | 60                                     |
| VX23  | 12                   | 65                                     |

\* There is no difference in the frequency and the inrush and energized apparent power, since a rectifying circuit is used in the AC (Class B coil, built-in full-wave rectifier type).

Note) The value at ambient temperature of 20°C and when the rated voltage is applied.

#### AC Specification

| Model | Frequency (Hz) | Apparent power (VA) |           | Temperature rise (C°) <sup>Note)</sup> |
|-------|----------------|---------------------|-----------|--|
|       |                | Inrush              | Energized |  |
| VX21  | 50             | 19                  | 10        | 50                                     |
|       | 60             | 16                  | 8         | 45                                     |
| VX22  | 50             | 43                  | 20        | 65                                     |
|       | 60             | 35                  | 17        | 60                                     |
| VX23  | 50             | 62                  | 32        | 65                                     |
|       | 60             | 52                  | 27        | 60                                     |

Note) The value at ambient temperature of 20°C and when the rated voltage is applied.

### Normally Open (N.O.)

#### DC Specification

| Model | Power consumption (W) | Temperature rise (C°) <sup>Note)</sup> |
|-------|-----------------------|--|
| VX21  | 4.5                   | 45                                     |
| VX22  | 7                     | 45                                     |
| VX23  | 10.5                  | 60                                     |

#### AC Specification (Class B coil, Built-in full-wave rectifier type)

| Model | Apparent power (VA)* | Temperature rise (C°) <sup>Note)</sup> |
|-------|----------------------|--|
| VX21  | 7                    | 55                                     |
| VX22  | 9.5                  | 60                                     |
| VX23  | 12                   | 65                                     |

\* There is no difference in the frequency and the inrush and energized apparent power, since a rectifying circuit is used in the AC (Class B coil, built-in full-wave rectifier type).

Note) The value at ambient temperature of 20°C and when the rated voltage is applied.

#### AC Specification

| Model | Frequency (Hz) | Apparent power (VA) |           | Temperature rise (C°) <sup>Note)</sup> |
|-------|----------------|---------------------|-----------|--|
|       |                | Inrush              | Energized |  |
| VX21  | 50             | 22                  | 11        | 55                                     |
|       | 60             | 18                  | 8         | 50                                     |
| VX22  | 50             | 46                  | 20        | 65                                     |
|       | 60             | 38                  | 18        | 60                                     |
| VX23  | 50             | 64                  | 32        | 65                                     |
|       | 60             | 54                  | 27        | 60                                     |

Note) The value at ambient temperature of 20°C and when the rated voltage is applied.


## Contents

|                              |      |
|------------------------------|------|
| For Air /Single Unit .....   | P.34 |
| For Air /Manifold .....      | P.36 |
| For Water /Single Unit ..... | P.38 |
| For Water /Manifold .....    | P.40 |
| For Oil /Single Unit .....   | P.42 |
| For Oil /Manifold .....      | P.44 |
| For Steam/Single Unit .....  | P.46 |

|                                 |      |
|---------------------------------|------|
| For Steam /Manifold .....       | P.48 |
| Construction: Single Unit ..... | P.50 |
| Construction: Manifold .....    | P.51 |
| Dimensions: Single unit .....   | P.52 |
| Dimensions: Manifold .....      | P.54 |
| Replacement Parts .....         | P.56 |

# Applicable Fluid Check List


## Direct Operated 2 Port Solenoid Valve Series VX21/22/23

All Options (Single Unit)  Refer to pages 34, 38, 42, and 46 for specifications and models.

VX2    0   -   -    1 -

• Option symbol

| Fluid and application                                       | Option symbol            | Seal material | Body/Shading coil material <small>Note 6)</small> | Coil insulation type <small>Note 4)</small> | Note   |
|---|--------------------------|---------------|---|---|--|
| Air   | Nil                      | NBR           | Brass (C37)/–                                     | B   | Select the built-in full-wave rectifier type for the AC spec |
|   | G                        |               | Stainless steel/–                                 |   |  |
| Medium vacuum, <small>Note 1)</small><br>Non-leak, Oil-free | V <small>Note 2)</small> | FKM           | Brass (C37)/–                                     | B   | Select the built-in full-wave rectifier type for the AC spec |
|   | M <small>Note 2)</small> |               | Stainless steel/–                                 |   |  |
| Water   | Nil                      | NBR           | Brass (C37)/Cu                                    | B   |  |
|   | G                        |               | Stainless steel/Ag                                |   |  |
| Heated water  | E                        | EPDM          | Brass (C37)/Cu                                    | H   |  |
|   | P                        |               | Stainless steel/Ag                                |   |  |
| Oil <small>Note 3)</small>                                  | A                        | FKM           | Brass (C37)/Cu                                    | B   |  |
|   | H                        |               | Stainless steel/Ag                                |   |  |
|   | D                        |               | Brass (C37)/Cu                                    | H   |  |
|   | N                        |               | Stainless steel/Ag                                |   |  |
| Steam   | S                        | PTFE          | Brass (C37)/Cu                                    | H   |  |
|   | Q                        |               | Stainless steel/Ag                                |   |  |
| High corrosive spec., Oil-free                              | L <small>Note 2)</small> | FKM           | Stainless steel/Ag                                | B   |  |
| Copper-free, Fluorine-free <small>Note 5)</small>           | J                        | EPDM          | Stainless steel/Ag                                | B   |  |
|   | P                        |               | Stainless steel/Ag                                | H   |  |
| Other combinations  | B                        | EPDM          | Brass (C37)/Cu                                    | B   |  |
|   | C                        | PTFE          | Stainless steel/Ag                                | B   |  |
|   | K                        |               |   |   |  |

All Options (Manifold)  Refer to pages 36, 40, 44, and 48 for specifications and models.

VX2    1   -   -    1

• Option symbol

• Base symbol

| Fluid and application   | Option symbol            | Base symbol | Seal material | Body/Shading coil material <small>Note 6)</small> | Coil insulation type <small>Note 4)</small> | Note  |
|---|--------------------------|-------------|---------------|---|---|---|
| Air   | Nil                      | 00          | NBR           | Aluminum/—  | B   | Select the built-in full-wave rectifier type for the AC spec. |
| Medium vacuum, Non-leak, Oil-free <small>Note 1)</small>              | V <small>Note 2)</small> | 00          | FKM           | Aluminum/—  | B   | Select the built-in full-wave rectifier type for the AC spec. |
| Water   | Nil                      | Nil         | NBR           | Brass (C37)/Cu                                    | B   |   |
|   | G                        |             |               | Stainless steel/Ag                                |   |   |
| Heated water  | E                        | Nil         | EPDM          | Brass (C37)/Cu                                    | H   |   |
|   | P                        |             |               | Stainless steel/Ag                                |   |   |
| Oil <small>Note 3)</small>  | A                        | Nil         | FKM           | Brass (C37)/Cu                                    | B   |   |
|   | H                        |             |               | Stainless steel/Ag                                |   |   |
|   | D                        |             |               | Brass (C37)/Cu                                    | H   |   |
|   | N                        |             |               | Stainless steel/Ag                                |   |   |
| Steam   | S                        | Nil         | PTFE          | Brass (C37)/Cu                                    | H   |   |
|   | Q                        |             |               | Stainless steel/Ag                                |   |   |
| High corrosive spec., Oil-free  | L <small>Note 2)</small> | Nil         | FKM           | Stainless steel/Ag                                | B   |   |
| Non-leak, Copper-free, Fluorine-free, Oil-free <small>Note 5)</small> | R                        | 00          | FKM           | Aluminum/Ag                                       | B   |   |

Note 1) The leakage amount (10<sup>-6</sup> Pa·m<sup>3</sup>/s) of "V", "M" options are values when the differential pressure is 0.1 MPa.

Note 2) "V", "M", "L" options are for non-lube treatment.

Note 3) The dynamic viscosity of the fluid must not exceed 50 mm<sup>2</sup>/s.

The special construction of the armature adopted in the built-in full-wave rectifier type gives an improvement in OFF response by providing clearance on the absorbed surface when it is switched ON.


Select the DC spec. or AC spec built-in full-wave rectifier type when the dynamic viscosity is higher than water or when the OFF response is prioritized.

Note 4) Coil insulation type Class H: AC spec. only

Note 5) The nuts (non-wetted parts) are nickel-plated on the C37 material.

Note 6) There is no shading coil attached to the DC spec. or AC spec built-in full-wave rectifier type.

\* Please contact SMC when fluids other than above are used.



VX2

VXD

VXZ

VXE

VXP

VXR

VXH

VXF

VX3

VXA

VCH

VDW

VQ

LVM

VCA

VCB

VCL

VCS

VCW

# Series VX21/22/23

⚠ When the fluid is air.

Please select the **VCA series** when using air because it is specifically designed for it. (The **VCA series** is limited to air to improve its function and service life.)

When you operate the **VX series** (AC spec) by air, select the built-in full-wave rectifier type.

- The special construction of the armature reduces abrasion, resulting in a longer service life.
- Reduced buzz noise

Best suited for medical equipment, low-noise environments, etc.


## For Air /Single Unit

(Inert gas, Non-leak, Medium vacuum)

### Model/Valve Specifications


#### N.C.

Passage symbol



#### N.O.

Passage symbol



#### Normally Closed (N.C.)

| Port size | Orifice dia. (mmø) | Model     | Max. operating pressure differential (MPa) | Flow characteristics                      |      |                | Max. system pressure (MPa) | Note) Mass (g) |
|-----------|--------------------|-----------|--|---|------|----------------|----------------------------|----------------|
|           |                    |           |  | C <sub>d</sub> (dm <sup>3</sup> /(s·bar)) | b    | C <sub>v</sub> |                            |                |
| 1/8 (6A)  | 2                  | VX2110-01 | 1.5  | 0.59                                      | 0.48 | 0.18           | 3.0                        | 300            |
|           | 3                  | VX2120-01 | 0.6  | 1.2                                       | 0.45 | 0.33           |                            |                |
|           | 4.5                | VX2130-01 | 0.2  | 2.3                                       | 0.46 | 0.61           |                            |                |
| 1/4 (8A)  | 2                  | VX2110-02 | 1.5  | 0.59                                      | 0.48 | 0.18           | 3.0                        | 470            |
|           |                    | VX2120-02 | 0.6  |   |      |                |                            |                |
|           |                    | VX2130-02 | 0.2  |   |      |                |                            |                |
|           | 3                  | VX2220-02 | 1.5  | 1.2                                       | 0.45 | 0.33           | 3.0                        | 620            |
|           |                    | VX2320-02 | 3.0  |   |      |                |                            | 300            |
|           |                    | VX2130-02 | 0.2  |   |      |                |                            | 470            |
|           | 4.5                | VX2230-02 | 0.35                                       | 2.3                                       | 0.46 | 0.61           | 3.0                        | 620            |
|           |                    | VX2330-02 | 0.9  |   |      |                |                            | 470            |
|           |                    | VX2240-02 | 0.15                                       |   |      |                |                            | 620            |
|           | 6                  | VX2340-02 | 0.35                                       | 4.1                                       | 0.30 | 1.10           | 1.0                        | 560            |
|           |                    | VX2250-02 | 0.08                                       | 6.4                                       | 0.30 | 1.60           |                            | 700            |
|           |                    | VX2350-02 | 0.2  |   |      |                |                            | 560            |
| 3/8 (10A) | 8                  | VX2260-02 | 0.03                                       | 8.8                                       | 0.30 | 2.00           | 1.0                        | 700            |
|           |                    | VX2360-02 | 0.07                                       |   |      |                |                            | 470            |
|           |                    | VX2220-03 | 1.5  | 1.2                                       | 0.45 | 0.33           | 3.0                        | 620            |
|           | 3                  | VX2320-03 | 3.0  |   |      |                |                            | 470            |
|           |                    | VX2230-03 | 0.35                                       | 2.3                                       | 0.46 | 0.61           | 3.0                        | 620            |
|           | 4.5                | VX2330-03 | 0.9  |   |      |                |                            | 470            |
|           |                    | VX2240-03 | 0.15                                       |   |      |                |                            | 620            |
|           | 6                  | VX2340-03 | 0.35                                       | 4.1                                       | 0.30 | 1.10           | 1.0                        | 560            |
|           |                    | VX2250-03 | 0.08                                       | 6.4                                       | 0.30 | 1.60           |                            | 700            |
|           |                    | VX2350-03 | 0.2  |   |      |                |                            | 560            |
|           | 8                  | VX2260-03 | 0.03                                       | 11  | 0.30 | 2.20           | 1.0                        | 700            |
|           |                    | VX2360-03 | 0.07                                       |   |      |                |                            | 560            |
| 1/2 (15A) | 10                 | VX2260-04 | 0.03                                       | 11  | 0.30 | 2.20           | 1.0                        | 560            |
|           |                    | VX2360-04 | 0.07                                       |   |      |                |                            | 700            |

Note) Mass of grommet type. Add 10 g for conduit type, 30 g for DIN terminal type, 60 g for conduit terminal type respectively.

- Refer to "Glossary of Terms" on page 26 for details on the max. operating pressure differential and the max. system pressure.

#### Normally Open (N.O.)

| Port size | Orifice dia. (mmø) | Model     | Max. operating pressure differential (MPa) | Flow characteristics                      |      |                | Max. system pressure (MPa) | Note) Mass (g) |
|-----------|--------------------|-----------|--|---|------|----------------|----------------------------|----------------|
|           |                    |           |  | C <sub>d</sub> (dm <sup>3</sup> /(s·bar)) | b    | C <sub>v</sub> |                            |                |
| 1/8 (6A)  | 2                  | VX2112-01 | 1.5  | 0.59                                      | 0.48 | 0.18           | 3.0                        | 320            |
|           | 3                  | VX2122-01 | 0.7  | 1.2                                       | 0.45 | 0.33           |                            |                |
|           | 4.5                | VX2132-01 | 0.3  | 2.3                                       | 0.46 | 0.61           |                            |                |
| 1/4 (8A)  | 2                  | VX2112-02 | 1.5  | 0.59                                      | 0.48 | 0.18           | 3.0                        | 500            |
|           |                    | VX2122-02 | 0.7  |   |      |                |                            |                |
|           |                    | VX2222-02 | 1.0  | 1.2                                       | 0.45 | 0.33           |                            | 660            |
|           | 3                  | VX2322-02 | 1.6  |   |      |                | 3.0                        | 320            |
|           |                    | VX2132-02 | 0.3  |   |      |                |                            | 500            |
|           | 4.5                | VX2232-02 | 0.45                                       | 2.3                                       | 0.46 | 0.61           |                            | 660            |
|           |                    | VX2332-02 | 0.8  |   |      |                | 3.0                        | 500            |
|           | 6                  | VX2242-02 | 0.25                                       | 4.1                                       | 0.30 | 1.10           |                            | 660            |
|           |                    | VX2342-02 | 0.45                                       |   |      |                |                            | 500            |
|           | 3                  | VX2222-03 | 1.0  | 1.2                                       | 0.45 | 0.33           | 3.0                        | 660            |
|           |                    | VX2322-03 | 1.6  |   |      |                |                            | 500            |
|           | 4.5                | VX2232-03 | 0.45                                       | 2.3                                       | 0.46 | 0.61           |                            | 660            |
| 3/8 (10)  | 6                  | VX2332-03 | 0.8  |   |      |                | 3.0                        | 500            |
|           |                    | VX2242-03 | 0.25                                       | 4.1                                       | 0.30 | 1.10           |                            | 660            |
|           |                    | VX2342-03 | 0.45                                       |   |      |                |                            | 500            |

Note) Mass of grommet type. Add 10 g for conduit type, 30 g for DIN terminal type, 60 g for conduit terminal type respectively.

- Refer to "Glossary of Terms" on page 26 for details on the max. operating pressure differential and the max. system pressure.

### Fluid and Ambient Temperature

| Fluid temperature (°C)       |                            | Ambient temperature<br>(°C) |
|------------------------------|----------------------------|-----------------------------|
| Solenoid valve option symbol |                            |                             |
| Nil, G                       | V, M                       |                             |
| −10 <sup>Note)</sup> to 60   | −10 <sup>Note)</sup> to 60 | −20 to 60                   |

Note) Dew point temperature: -10°C or less

### Valve Leakage Rate

#### Internal Leakage

| Seal material | Leakage rate                   |   |
|---------------|--------------------------------|---|
|               | Air                            | Non-leak, Note) Medium vacuum                   |
| NBR, FKM      | 1 cm <sup>3</sup> /min or less | 10 <sup>-6</sup> Pa·m <sup>3</sup> /sec or less |

#### External Leakage

| Seal material | Leakage rate                   |   |
|---------------|--------------------------------|---|
|               | Air                            | Non-leak, Note) Medium vacuum                   |
| NBR, FKM      | 1 cm <sup>3</sup> /min or less | 10 <sup>-6</sup> Pa·m <sup>3</sup> /sec or less |

Note) Value for option "V", "M" (Non-leak, Medium vacuum)

## How to Order (Single Unit)

**AC** VX **21** **2** **0** **0** **0** **1** **1** **G** **R** **1** **—**

**DC** VX **21** **2** **0** **0** **0** **1** **5** **G** **1** **—**

**Model**  
Refer to the table (1) shown below for availability.

**Orifice diameter**  
Refer to the table (1) shown below for availability.

**Valve/Body configuration**

|   |                    |
|---|--------------------|
| 0 | N.C. / Single unit |
| 2 | N.O. / Single unit |

**Solenoid valve option**  
Refer to the table (2) shown below for availability.

**Suffix**

|     |                |
|-----|----------------|
| Nil | —              |
| Z   | Oil-free spec. |

Select nil because the solenoid valve options "V", "M" are the oil-free treatment.

**Thread type**

|     |      |
|-----|------|
| Nil | Rc   |
| T   | NPTF |
| F   | G    |
| N   | NPT  |

**Rated voltage**

|   |                  |   |                  |
|---|------------------|---|------------------|
| 1 | 100 VAC 50/60 Hz | 6 | 12 VDC           |
| 2 | 200 VAC 50/60 Hz | 7 | 240 VAC 50/60 Hz |
| 3 | 110 VAC 50/60 Hz | 8 | 48 VAC 50/60 Hz  |
| 4 | 220 VAC 50/60 Hz | J | 230 VAC 50/60 Hz |
| 5 | 24 VDC           |   |                  |

\* Refer to the table (3) shown below for availability.

Refer to page 56 for ordering coil only.

**Port size**  
Refer to the table (1) shown below for availability.

**Built-in full-wave rectifier type**

|     |              |
|-----|--------------|
| Nil | None         |
| B   | With bracket |

\* VX021N-12A and VX022N-12A are packed in the same container as the main body.  
\* Refer to the table (4) if a bracket is ordered separately.

**Electrical entry**

**G - Grommet**  
**GS** - With grommet surge voltage suppressor

**C - Conduit**

**T** - With conduit terminal  
**TS** - With conduit terminal and surge voltage suppressor  
**TL** - With conduit terminal and light  
**TZ** - With conduit terminal, surge voltage suppressor and light

**D** - DIN terminal  
**DS** - DIN terminal with surge voltage suppressor  
**DL** - DIN terminal with light  
**DZ** - DIN terminal with surge voltage suppressor and light  
**DO** - For DIN terminal (without connector, gasket is included.)

\* DIN type is available with class B only.

\* Refer to the table (3) for the available combinations between each electrical option (S, L, Z) and rated voltage.  
\* Option "S", "Z" are not available as surge voltage suppressor is integrated into the AC/Class B, as a standard.  
\* **us**: Light and surge voltage suppressor are not available.

**Table (1) Model/Orifice Diameter/Port Size**  
**Normally Closed (N.C.)**

| Solenoid valve (Port size) |          |          |          | Orifice symbol (Diameter) |              |                |              |              |               |
|----------------------------|----------|----------|----------|---------------------------|--------------|----------------|--------------|--------------|---------------|
| Model                      | VX21     | VX22     | VX23     | 1<br>(2 mmø)              | 2<br>(3 mmø) | 3<br>(4.5 mmø) | 4<br>(6 mmø) | 5<br>(8 mmø) | 6<br>(10 mmø) |
| Port no.<br>(Port size)    | 01 (1/8) | —        | —        | ●                         | ●            | ●              | —            | —            | —             |
|                            | 02 (1/4) | —        | —        | ●                         | ●            | ●              | —            | —            | —             |
|                            | —        | 02 (1/4) | 02 (1/4) | —                         | ●            | ●              | ●            | ●            | ●             |
|                            | —        | 03 (3/8) | 03 (3/8) | —                         | ●            | ●              | ●            | ●            | ●             |
|                            | —        | 04 (1/2) | 04 (1/2) | —                         | —            | —              | —            | —            | ●             |

**Normally Open (N.O.)**

| Solenoid valve (Port size) |          |          |          | Orifice symbol (Diameter) |              |                |              |
|----------------------------|----------|----------|----------|---------------------------|--------------|----------------|--------------|
| Model                      | VX21     | VX22     | VX23     | 1<br>(2 mmø)              | 2<br>(3 mmø) | 3<br>(4.5 mmø) | 4<br>(6 mmø) |
| Port no.<br>(Port size)    | 01 (1/8) | —        | —        | ●                         | ●            | ●              | —            |
|                            | 02 (1/4) | —        | —        | ●                         | ●            | ●              | —            |
|                            | —        | 02 (1/4) | 02 (1/4) | —                         | ●            | ●              | ●            |
|                            | —        | 03 (3/8) | 03 (3/8) | —                         | ●            | ●              | ●            |
|                            | —        | —        | —        | —                         | —            | —              | —            |

**Table (2) Solenoid Valve Option**

| Option symbol | Seal material | Body material   | Coil insulation type | Note   |
|---------------|---------------|-----------------|----------------------|--|
| Nil           | NBR           | Brass (C37)     | B                    | Non-leak (10 <sup>-6</sup> Pam <sup>3</sup> /sec), Oil-free, Medium vacuum (0.1 Pa.abs) <sup>Note)</sup> |
| G             |               | Stainless steel |                      |  |
| V             | FKM           | Brass (C37)     |                      |  |
| M             |               | Stainless steel |                      |  |

\* Be careful of the Max. operating pressure differential when using this valve for vacuum applications. (A differential of 0.1 MPa or more is recommended).

**Table (3) Rated Voltage – Electrical Option**

| Rated voltage |                |         | Class B                            |                 |  |
|---------------|----------------|---------|------------------------------------|-----------------|--|
| AC/DC         | Voltage symbol | Voltage | S<br>With surge voltage suppressor | L<br>With light | Z<br>With light and surge voltage suppressor |
| AC            | 1              | 100 V   | —                                  | ●               | —  |
|               | 2              | 200 V   | —                                  | ●               | —  |
|               | 3              | 110 V   | —                                  | ●               | —  |
|               | 4              | 220 V   | —                                  | ●               | —  |
|               | 7              | 240 V   | —                                  | —               | —  |
|               | 8              | 48 V    | —                                  | —               | —  |
|               | J              | 230 V   | —                                  | —               | —  |
| DC            | 5              | 24 V    | ●                                  | ●               | ●  |
|               | 6              | 12 V    | ●                                  | —               | —  |

\* Option "S", "Z" are not available as surge voltage suppressor is integrated into the AC/Class B, as a standard.

**Table (4) Bracket Part No.**

| Model  | Part no.     |
|--|--------------|
| VX21 <sup>1</sup> / <sub>3</sub> 0                                       | VX021N-12A   |
| VX22 <sup>1</sup> / <sub>3</sub> 0<br>VX23 <sup>1</sup> / <sub>3</sub> 0 | VX022N-12A   |
| VX22 <sup>5</sup> / <sub>6</sub> 0<br>VX23 <sup>5</sup> / <sub>6</sub> 0 | VX023N-12A-L |

### ⚠ When the fluid is air.

When you operate the **VX series** (AC spec) by air, select the built-in full-wave rectifier type.

- The special construction of the armature reduces abrasion, resulting in a longer service life.
- Reduced buzz noise

Best suited for medical equipment, low-noise environments, etc.

Dimensions  
→ page 52 (Single unit)



## For Air/Manifold

(Inert gas, Non-leak, Medium vacuum)

### Solenoid Valve for Manifold/Valve Specifications




**N.C.**

Passage symbol



**N.O.**

Passage symbol



**⚠ When the fluid is air.**

When you operate the **VX series (AC spec)** by air, select the built-in full-wave rectifier type.

- The special construction of the armature reduces abrasion, resulting in a longer service life.
- Reduced buzz noise
- Best suited for medical equipment, low-noise environments, etc.

#### Normally Closed (N.C.)

| Orifice dia.<br>(mm) | Model     | Max. operating pressure differential (MPa) | Flow characteristics        |      |      | Max. system pressure (MPa) |
|----------------------|-----------|--|-----------------------------|------|------|----------------------------|
|                      |           |  | C[dm <sup>3</sup> /(s·bar)] | b    | Cv   |                            |
| 2                    | VX2111-00 | 1.5  | 0.59                        | 0.48 | 0.18 | 3.0                        |
| 3                    | VX2121-00 | 0.6  | 1.2                         | 0.45 | 0.33 |                            |
|                      | VX2221-00 | 1.5  |                             |      |      |                            |
|                      | VX2321-00 | 3.0  |                             |      |      |                            |
| 4.5                  | VX2131-00 | 0.2  | 2.3                         | 0.46 | 0.61 |                            |
|                      | VX2231-00 | 0.35                                       |                             |      |      |                            |
|                      | VX2331-00 | 0.9  |                             |      |      |                            |
| 6                    | VX2241-00 | 0.15                                       | 4.1                         | 0.30 | 1.10 |                            |
|                      | VX2341-00 | 0.35                                       |                             |      |      |                            |



- Refer to "Glossary of Terms" on page 26 for details on the max. operating pressure differential and the max. system pressure.
- If you intend to use any of the solenoid valves at the rated maximum operating pressure for the AC spec with shading coil, please contact us beforehand.

#### Normally Open (N.O.)

| Orifice<br>dia.<br>(mm) | Model     | Max. operating<br>pressure<br>differential (MPa) | Flow characteristics        |      |      | Max. system<br>pressure<br>(MPa) |
|-------------------------|-----------|--|-----------------------------|------|------|----------------------------------|
|                         |           | AC, DC   | C[dm <sup>3</sup> /(s·bar)] | b    | Cv   |                                  |
| 2                       | VX2113-00 | 1.5  | 0.59                        | 0.48 | 0.18 | 3.0                              |
| 3                       | VX2123-00 | 0.7  | 1.2                         | 0.45 | 0.33 |                                  |
|                         | VX2223-00 | 1.0  |                             |      |      |                                  |
|                         | VX2323-00 | 1.6  |                             |      |      |                                  |
| 4.5                     | VX2133-00 | 0.3  | 2.3                         | 0.46 | 0.61 |                                  |
|                         | VX2233-00 | 0.45   |                             |      |      |                                  |
|                         | VX2333-00 | 0.8  |                             |      |      |                                  |
| 6                       | VX2243-00 | 0.25   | 4.1                         | 0.30 | 1.10 |                                  |
|                         | VX2343-00 | 0.45   |                             |      |      |                                  |



- Refer to "Glossary of Terms" on page 26 for details on the max. operating pressure differential and the max. system pressure.

### Fluid and Ambient Temperature

| Fluid temperature (°C)       |                            | Ambient temperature<br>(°C) |
|------------------------------|----------------------------|-----------------------------|
| Solenoid valve option symbol |                            |                             |
| Nil, R                       | V                          |                             |
| −10 <sup>Note)</sup> to 60   | −10 <sup>Note)</sup> to 60 | −20 to 60                   |



Note) Dew point temperature: -10°C or less

### Valve Leakage Rate

#### Internal Leakage

| Seal material | Leakage rate                   |   |
|---------------|--------------------------------|---|
|               | Air                            | Non-leak, (Note)<br>Medium vacuum               |
| NBR, FKM      | 1 cm <sup>3</sup> /min or less | 10 <sup>-6</sup> Pa·m <sup>3</sup> /sec or less |

#### External Leakage

| Seal material | Leakage rate                   |   |
|---------------|--------------------------------|---|
|               | Air                            | Non-leak, (Note)<br>Medium vacuum               |
| NBR, FKM      | 1 cm <sup>3</sup> /min or less | 10 <sup>-6</sup> Pa·m <sup>3</sup> /sec or less |



Note) Value for option "V", "M" (Non-leak, Medium vacuum)



## How to Order (Solenoid Valve for Manifold)

**AC** VX 21 2 1 - 00 - 1 G R 1  
**DC** VX 21 2 1 - 00 - 5 G 1

**Model** • Refer to the table (1) shown below for availability.

**Orifice diameter** • Refer to the table (1) shown below for availability.

**Valve/Body configuration** •

|   |                     |
|---|---------------------|
| 1 | N.C. (For manifold) |
| 3 | N.O. (For manifold) |

**Solenoid valve option** • Refer to the table (2) shown below for availability.

|   |                  |   |                  |
|---|------------------|---|------------------|
| 1 | 100 VAC 50/60 Hz | 6 | 12 VDC           |
| 2 | 200 VAC 50/60 Hz | 7 | 240 VAC 50/60 Hz |
| 3 | 110 VAC 50/60 Hz | 8 | 48 VAC 50/60 Hz  |
| 4 | 220 VAC 50/60 Hz | J | 230 VAC 50/60 Hz |
| 5 | 24 VDC           |   |                  |

\* Refer to the table (3) shown below for availability.

**Rated voltage** •

**Suffix** •

|     |                |
|-----|----------------|
| Nil | —              |
| Z   | Oil-free spec. |

Select nil because the solenoid valve options "V", "R" are the oil-free treatment.

**Electrical entry** •

**G** - Grommet  
**GS** - With grommet surge voltage suppressor

**C** - Conduit

**T** - With conduit terminal  
**TS** - With conduit terminal and surge voltage suppressor  
**TL** - With conduit terminal and light  
**TZ** - With conduit terminal, surge voltage suppressor and light

**D** - DIN terminal  
**DS** - DIN terminal with surge voltage suppressor  
**DL** - DIN terminal with light  
**DZ** - DIN terminal with surge voltage suppressor and light  
**DO** - For DIN terminal (without connector, gasket is included.)

\* DIN type is available with class B only.

\* Refer to the table (3) for the available combinations between each electrical option (S, L, Z) and rated voltage.

\* Option "S", "Z" are not available as surge voltage suppressor is integrated into the AC/Class B, as a standard.

\* **us** : Light and surge voltage suppressor are not available.

## How to Order Manifold Bases

**VVX21**  
**VVX22** 1 - 07 - 1  
**VVX23**

**Number of manifolds** •

|    |             |
|----|-------------|
| 02 | 2 stations  |
| 10 | 10 stations |

**Port size (Out port)** •

|   |        |
|---|--------|
| 1 | Rc 1/8 |
| 2 | Rc 1/4 |

\* All IN ports are Rc 3/8.

**Thread type** •

|     |      |
|-----|------|
| Nil | Rc   |
| T   | NPTF |
| F   | G    |
| N   | NPT  |

**Suffix** •

|     |                |
|-----|----------------|
| Nil | —              |
| Z   | Oil-free spec. |

**Base** •

|     |                     |
|-----|---------------------|
| Nil | Common SUP type     |
| V   | Individual SUP type |

**Blanking plate part no.**

For VX21: VX011-001  
For VX22/23: VX011-006

**Seal material** •

|     |     |
|-----|-----|
| Nil | NBR |
| F   | FKM |

## How to Order Manifold Assemblies (Example)

Enter the valve and blanking plate to be mounted under the manifold base part number.

Example  
VVX211-05-1 ..... 1 set  
\* VX2111-00-1G1 ..... 4 sets  
\* VX011-001 ..... 1 set

"\*" is the symbol for mounting.  
Add an "\*" in front of the part numbers for solenoid valves, etc. to be mounted.

Enter the product's part number in order, counting the 1st station from the left in the manifold arrangement, when viewing the individual port in front.

\* Refer to the table (3) for the available combinations between each electrical option (S, L, Z) and rated voltage.

\* Option "S", "Z" are not available as surge voltage suppressor is integrated into the AC/Class B, as a standard.

\* **us** : Light and surge voltage suppressor are not available.

Table (1) Model/Orifice Diameter

| Solenoid valve | Orifice symbol (Diameter) |              |                |              |
|----------------|---------------------------|--------------|----------------|--------------|
|                | 1<br>(2 mmø)              | 2<br>(3 mmø) | 3<br>(4.5 mmø) | 4<br>(6 mmø) |
| VX21           | ●                         | ●            | ●              | —            |
| VX22           | —                         | ●            | ●              | ●            |
| VX23           | —                         | ●            | ●              | ●            |

Table (2) Solenoid Valve Option

| Option symbol | Body, Base material | Seal material | Coil insulation type | Note  |
|---------------|---------------------|---------------|----------------------|---|
| Nil           | Aluminum            | NBR           | B                    | —   |
| V             |                     | FKM           |                      | Non-leak, Medium vacuum, Oil-free                               |
| R             |                     |               |                      | Non-leak, Copper-free, Fluorine-free, Oil-free <sup>Note)</sup> |

Note) The nuts (non-wetted parts) are nickel-plated on the C37 material.

\* Be careful of the Max. operating pressure differential when using this valve for vacuum applications. (A differential of 0.1 MPa or more is recommended).

## ⚠ When the fluid is air.

When you operate the **VX series** (AC spec) by air, select the built-in full-wave rectifier type.

- The special construction of the armature reduces abrasion, resulting in a longer service life.
- Reduced buzz noise

Best suited for medical equipment, low-noise environments, etc.

Table (3) Rated Voltage – Electrical Option

| Rated voltage |                | Class B                       |            |   |
|---------------|----------------|-------------------------------|------------|---|
|               |                | S                             | L          | Z                                       |
| AC/DC         | Voltage symbol | With surge voltage suppressor | With light | With light and surge voltage suppressor |
| AC            | 1              | 100 V                         | —          | —                                       |
|               | 2              | 200 V                         | —          | —                                       |
|               | 3              | 110 V                         | —          | —                                       |
|               | 4              | 220 V                         | —          | —                                       |
|               | 7              | 240 V                         | —          | —                                       |
|               | 8              | 48 V                          | —          | —                                       |
| DC            | J              | 230 V                         | —          | —                                       |
|               | 5              | 24 V                          | ●          | ●                                       |
|               | 6              | 12 V                          | ●          | —                                       |

\* Option "S", "Z" are not available as surge voltage suppressor is integrated into the AC/Class B, as a standard.


Dimensions  
→ page 54 (Manifold)

## For Water /Single Unit

### Model/Valve Specifications


#### N.C.

Passage symbol



#### N.O.

Passage symbol



#### Normally Closed (N.C.)

| Port size | Orifice dia. (mm) | Model     | Max. operating pressure differential (MPa) |  | Flow characteristics                 |              | Max. system pressure (MPa) | Note) Mass (g)                         |      |
|-----------|-------------------|-----------|--|--|--------------------------------------|--------------|----------------------------|--|------|
|           |                   |           | AC   | DC<br>AC (Built-in full-wave rectifier type) |                                      |              |                            |  |      |
|           |                   |           |  |  | Av x 10 <sup>-6</sup> m <sup>2</sup> | Cv converted |                            |  |      |
| 1/8 (6A)  | 2                 | VX2110-01 | 2.0  | 1.5  | 4.1                                  | 0.17         | 3.0                        | 300                                    |      |
|           | 3                 | VX2120-01 | 0.9  | 0.5  | 7.9                                  | 0.33         |                            |  |      |
|           | 4.5               | VX2130-01 | 0.4  | 0.2  | 15.0                                 | 0.61         |                            |  |      |
| 1/4 (8A)  | 2                 | VX2110-02 | 2.0  | 1.5  | 4.1                                  | 0.17         | 3.0                        | 470<br>620<br>300<br>470<br>620<br>470 |      |
|           | 3                 | VX2120-02 | 0.9  | 0.5  | 7.9                                  | 0.33         |                            |  |      |
|           |                   | VX2220-02 | 1.7  | 1.5  |                                      |              |                            |  |      |
|           |                   | VX2320-02 | 2.5  | 3.0  |                                      |              |                            |  |      |
|           | 4.5               | VX2130-02 | 0.4  | 0.2  | 15.0                                 | 0.61         |                            |  |      |
|           |                   | VX2230-02 | 0.6  | 0.35   |                                      |              |                            |  |      |
|           |                   | VX2330-02 | 0.85                                       | 0.9  |                                      |              |                            |  |      |
|           | 6                 | VX2240-02 | 0.35                                       | 0.15   | 26.0                                 | 1.10         | 470<br>620                 |  |      |
|           |                   | VX2340-02 | 0.55                                       | 0.3  |                                      |              |                            |  |      |
|           | 8                 | VX2250-02 | 0.13                                       | 0.08   | 38.0                                 | 1.60         | 1.0                        | 560<br>700<br>560<br>700               |      |
|           |                   | VX2350-02 | 0.17                                       | 0.2  |                                      |              |                            |  |      |
|           | 10                | VX2260-02 | 0.08                                       | 0.03   | 46.0                                 | 1.90         |                            |  |      |
| VX2360-02 |                   | 0.1       | 0.07                                       |  |                                      |              |                            |  |      |
| 3/8 (10A) | 3                 | VX2220-03 | 1.7  | 1.5  | 7.9                                  | 0.33         | 3.0                        | 470<br>620<br>470<br>620<br>470<br>620 |      |
|           |                   | VX2320-03 | 2.5  | 3.0  |                                      |              |                            |  |      |
|           | 4.5               | VX2230-03 | 0.6  | 0.35   | 15.0                                 | 0.61         |                            |  |      |
|           |                   | VX2330-03 | 0.85                                       | 0.9  |                                      |              |                            |  |      |
|           | 6                 | VX2240-03 | 0.35                                       | 0.15   | 26.0                                 | 1.10         |                            |  |      |
|           |                   | VX2340-03 | 0.55                                       | 0.3  |                                      |              |                            |  |      |
|           | 8                 | VX2250-03 | 0.13                                       | 0.08   | 38.0                                 | 1.60         | 1.0                        | 560<br>700<br>560<br>700<br>560<br>700 |      |
|           |                   | VX2350-03 | 0.17                                       | 0.2  |                                      |              |                            |  |      |
|           | 10                | VX2260-03 | 0.08                                       | 0.03   | 53.0                                 | 2.20         |                            |  |      |
|           |                   | VX2360-03 | 0.1  | 0.07   |                                      |              |                            |  |      |
|           | 1/2 (15A)         | 10        | VX2260-04                                  | 0.08   | 0.03                                 | 53.0         |                            |  | 2.20 |
|           |                   |           | VX2360-04                                  | 0.1  | 0.07                                 |              |                            |  |      |

Note) Mass of grommet type. Add 10 g for conduit type, 30 g for DIN terminal type, and 60 g for conduit terminal type respectively.

- Refer to "Glossary of Terms" on page 26 for details on the max. operating pressure differential and the max. system pressure.

#### Normally Open (N.O.)

| Port size | Orifice dia. (mmø) | Model     | Max. operating pressure differential (MPa) | Flow characteristics                 |              | Max. system pressure (MPa) | Note)<br>Mass (g) |
|-----------|--------------------|-----------|--|--------------------------------------|--------------|----------------------------|-------------------|
|           |                    |           |  | Av x 10 <sup>-6</sup> m <sup>2</sup> | Cv converted |                            |                   |
| 1/8 (6A)  | 2                  | VX2112-01 | 0.9  | 4.1                                  | 0.17         | 3.0                        | 320               |
|           | 3                  | VX2122-01 | 0.45                                       | 7.9                                  | 0.33         |                            |                   |
|           | 4.5                | VX2132-01 | 0.2  | 15.0                                 | 0.61         |                            |                   |
| 2         | VX2112-02          | 0.9       | 4.1  | 0.17                                 |              |                            |                   |
| 1/4 (8A)  | 3                  | VX2122-02 | 0.45                                       | 7.9                                  | 0.33         |                            | 500               |
|           |                    | VX2222-02 | 0.8  |                                      |              |                            | 660               |
|           |                    | VX2322-02 | 1.2  |                                      |              |                            | 320               |
|           | 4.5                | VX2132-02 | 0.2  | 15.0                                 | 0.61         |                            | 500               |
|           |                    | VX2232-02 | 0.3  |                                      |              |                            | 660               |
|           |                    | VX2332-02 | 0.6  |                                      |              |                            | 500               |
|           | 6                  | VX2242-02 | 0.15                                       | 26.0                                 | 1.10         |                            | 660               |
|           |                    | VX2342-02 | 0.35                                       |                                      |              |                            | 660               |
|           | 3/8 (10)           | 3         | VX2222-03                                  | 0.8                                  | 7.9          |                            | 0.33              |
| VX2322-03 |                    |           | 1.2  | 660                                  |              |                            |                   |
| 4.5       |                    | VX2232-03 | 0.3  | 15.0                                 | 0.61         |                            | 500               |
|           |                    | VX2332-03 | 0.6  |                                      |              | 660                        |                   |
| 6         |                    | VX2242-03 | 0.15                                       | 26.0                                 | 1.10         | 500                        |                   |
|           |                    | VX2342-03 | 0.35                                       |                                      |              | 660                        |                   |

Note) Mass of grommet type. Add 10 g for conduit type, 30 g for DIN terminal type, and 60 g for conduit terminal type respectively.

- Refer to "Glossary of Terms" on page 26 for details on the max. operating pressure differential and the max. system pressure.

### Fluid and Ambient Temperature

| Fluid temperature (°C)       |         | Ambient temperature<br>(°C) |
|------------------------------|---------|-----------------------------|
| Solenoid valve option symbol |         |                             |
| Nil, G, L                    | E, P    |                             |
| 1 to 60                      | 1 to 99 | -20 to 60                   |

Note) With no freezing

### Valve Leakage Rate

#### Internal Leakage

| Seal material  | Leakage rate (Water)             |
|----------------|----------------------------------|
| NBR, FKM, EPDM | 0.1 cm <sup>3</sup> /min or less |

#### External Leakage

| Seal material  | Leakage rate (Water)             |
|----------------|----------------------------------|
| NBR, FKM, EPDM | 0.1 cm <sup>3</sup> /min or less |

# Direct Operated 2 Port Solenoid Valve **Series VX21/22/23**

**For Water/Single Unit**

## How to Order (Single Unit)

**Model** • Refer to the table (1) shown below for availability.

**Orifice diameter** • Refer to the table (1) shown below for availability.

**Valve/Body configuration**

|   |                    |
|---|--------------------|
| 0 | N.C. / Single unit |
| 2 | N.O. / Single unit |

**Solenoid valve option** • Refer to the table (2) shown below for availability.

**Suffix**

|     |                |
|-----|----------------|
| Nil | —              |
| Z   | Oil-free spec. |

Select nil because the solenoid valve option "L" is the oil-free treatment.  
Class B oil-free AC coils are applicable to the full-wave rectifier type only.  
Select the full-wave rectifier type.

**Thread type**

|     |      |
|-----|------|
| Nil | Rc   |
| T   | NPTF |
| F   | G    |
| N   | NPT  |

**Rated voltage**

|   |                  |   |                  |
|---|------------------|---|------------------|
| 1 | 100 VAC 50/60 Hz | 6 | 12 VDC           |
| 2 | 200 VAC 50/60 Hz | 7 | 240 VAC 50/60 Hz |
| 3 | 110 VAC 50/60 Hz | 8 | 48 VAC 50/60 Hz  |
| 4 | 220 VAC 50/60 Hz | J | 230 VAC 50/60 Hz |
| 5 | 24 VDC           |   |                  |

\* Refer to the table (3) shown below for availability.

Refer to page 56 for ordering coil only.

**Port size** • Refer to the table (1) shown below for availability.

**Full-wave rectifier**

|     |  |
|-----|--|
| Nil | None   |
| R   | Built-in full-wave rectifier type (Class B only) |

**Bracket**

|     |              |
|-----|--------------|
| Nil | None         |
| B   | With bracket |

\* VX021N-12A and VX022-12A are packed in the same container as the main body.  
\* Refer to the table (4) if a bracket is ordered separately.

**Electrical entry**

|  |   |
|--|---|
| <b>G</b> - Grommet<br><b>GS</b> - With grommet surge voltage suppressor  | <b>C</b> - Conduit  |
| <b>T</b> - With conduit terminal<br><b>TS</b> - With conduit terminal and surge voltage suppressor<br><b>TL</b> - With conduit terminal and light<br><b>TZ</b> - With conduit terminal, surge voltage suppressor and light | <b>D</b> - DIN terminal<br><b>DS</b> - DIN terminal with surge voltage suppressor<br><b>DL</b> - DIN terminal with light<br><b>DZ</b> - DIN terminal with surge voltage suppressor and light<br><b>DO</b> - For DIN terminal (without connector, gasket is included.) |

\* Refer to the table (3) for the available combinations between each electrical option (S, L, Z) and rated voltage.  
\* Option "S", "Z" are not available as surge voltage suppressor is integrated into the AC/Class B, as a standard.  
\* us : Light and surge voltage suppressor are not available.

**Table (1) Model/Orifice Diameter/Port Size**  
**Normally Closed (N.C.)**

| Solenoid valve (Port size) |          |          |          | Orifice symbol (Diameter) |              |                |              |              |               |
|----------------------------|----------|----------|----------|---------------------------|--------------|----------------|--------------|--------------|---------------|
| Model                      | VX21     | VX22     | VX23     | 1<br>(2 mmø)              | 2<br>(3 mmø) | 3<br>(4.5 mmø) | 4<br>(6 mmø) | 5<br>(8 mmø) | 6<br>(10 mmø) |
| Port no.<br>(Port size)    | 01 (1/8) | —        | —        | ●                         | ●            | ●              | —            | —            | —             |
|                            | 02 (1/4) | —        | —        | ●                         | ●            | ●              | —            | —            | —             |
|                            | —        | 02 (1/4) | 02 (1/4) | —                         | ●            | ●              | ●            | ●            | ●             |
|                            | —        | 03 (3/8) | 03 (3/8) | —                         | ●            | ●              | ●            | ●            | ●             |
|                            | —        | 04 (1/2) | 04 (1/2) | —                         | —            | —              | —            | —            | ●             |

**Normally Open (N.O.)**

| Solenoid valve (Port size) |          |          |          | Orifice symbol (Diameter) |              |                |              |
|----------------------------|----------|----------|----------|---------------------------|--------------|----------------|--------------|
| Model                      | VX21     | VX22     | VX23     | 1<br>(2 mmø)              | 2<br>(3 mmø) | 3<br>(4.5 mmø) | 4<br>(6 mmø) |
| Port no.<br>(Port size)    | 01 (1/8) | —        | —        | ●                         | ●            | ●              | —            |
|                            | 02 (1/4) | —        | —        | ●                         | ●            | ●              | —            |
|                            | —        | 02 (1/4) | 02 (1/4) | —                         | ●            | ●              | ●            |
|                            | —        | 03 (3/8) | 03 (3/8) | —                         | ●            | ●              | ●            |

**Table (3) Rated Voltage – Electrical Option**

| Rated voltage |                |         | Class B |   |   | Class H                    |   |   |
|---------------|----------------|---------|---------|---|---|----------------------------|---|---|
| AC/DC         | Voltage symbol | Voltage | S       | L | Z | S                          | L | Z |
| AC            | 1              | 100 V   | ●       | ● | ● | ●                          | ● | ● |
|               | 2              | 200 V   | ●       | ● | ● | ●                          | ● | ● |
|               | 3              | 110 V   | ●       | ● | ● | ●                          | ● | ● |
|               | 4              | 220 V   | ●       | ● | ● | ●                          | ● | ● |
|               | 7              | 240 V   | ●       | — | — | ●                          | — | — |
|               | 8              | 48 V    | ●       | — | — | ●                          | — | — |
|               | J              | 230 V   | ●       | — | — | ●                          | — | — |
| DC            | 5              | 24 V    | ●       | ● | ● | DC spec. is not available. |   |   |
|               | 6              | 12 V    | ●       | — | — |                            |   |   |

\* Option "S", "Z" are not available as surge voltage suppressor is integrated into the AC/Class B, as a standard.

**Table (2) Solenoid Valve Option**

| Option symbol | Seal material | Body/Shading coil material | Coil insulation type | Note                     |
|---------------|---------------|----------------------------|----------------------|--------------------------|
| Nil           | NBR           | Brass (C37)/Cu             | B                    | —                        |
| G             |               | Stainless steel/Ag         |                      |                          |
| E             | EPDM          | Brass (C37)/Cu             | H                    | Heated water (AC only)   |
| P             |               | Stainless steel/Ag         |                      |                          |
| L             | FKM           | Stainless steel/Ag         | B                    | High corrosive, Oil-free |

\* us : Coil insulation type Class H is not available.


**Table (4) Bracket Part No.**

| Model                              | Part no.     |
|------------------------------------|--------------|
| VX21 <sup>1</sup> / <sub>3</sub> 0 | VX021N-12A   |
| VX22 <sup>2</sup> / <sub>3</sub> 0 | VX022N-12A   |
| VX23 <sup>2</sup> / <sub>3</sub> 0 |              |
| VX22 <sup>5</sup> / <sub>6</sub> 0 | VX023N-12A-L |
| VX23 <sup>5</sup> / <sub>6</sub> 0 |              |


Dimensions → page 52 (Single unit)

**For Water /Manifold**


**Solenoid Valve for Manifold/Valve Specifications**



**N.C.**



**N.O.**



**Normally Closed (N.C.)**

| Orifice dia.<br>(mmø) | Model  | Max. operating pressure differential (MPa) |   | Flow characteristics                 |              | Max. system pressure (MPa) |
|-----------------------|--------|--|---|--------------------------------------|--------------|----------------------------|
|                       |        | AC   | DC AC (Built-in full-wave rectifier type) | Av x 10 <sup>-6</sup> m <sup>2</sup> | Cv converted |                            |
| 2                     | VX2111 | 2.0  | 1.5                                       | 4.1                                  | 0.17         | 3.0                        |
|                       | VX2121 | 0.9  | 0.5                                       |                                      |              |                            |
| 3                     | VX2221 | 1.7  | 1.5                                       | 7.9                                  | 0.33         |                            |
|                       | VX2321 | 2.5  | 3.0                                       |                                      |              |                            |
| 4.5                   | VX2131 | 0.4  | 0.2                                       | 15                                   | 0.61         |                            |
|                       | VX2231 | 0.6  | 0.35                                      |                                      |              |                            |
|                       | VX2331 | 0.85                                       | 0.9                                       |                                      |              |                            |
| 6                     | VX2241 | 0.35                                       | 0.15                                      | 26                                   | 1.10         |                            |
|                       | VX2341 | 0.55                                       | 0.3                                       |                                      |              |                            |

• Refer to "Glossary of Terms" on page 26 for details on the max. operating pressure differential and the max. system pressure.

**Normally Open (N.O.)**

| Orifice dia.<br>(mmø) | Model  | Max. operating pressure differential (MPa) | Flow characteristics                 |              | Max. system pressure (MPa) |
|-----------------------|--------|--|--------------------------------------|--------------|----------------------------|
|                       |        |  | Av x 10 <sup>-6</sup> m <sup>2</sup> | Cv converted |                            |
| 2                     | VX2113 | 0.9  | 4.1                                  | 0.17         | 3.0                        |
|                       | VX2123 | 0.45                                       |                                      |              |                            |
| 3                     | VX2223 | 0.8  | 7.9                                  | 0.33         |                            |
|                       | VX2323 | 1.2  |                                      |              |                            |
| 4.5                   | VX2133 | 0.2  | 15                                   | 0.61         |                            |
|                       | VX2233 | 0.3  |                                      |              |                            |
|                       | VX2333 | 0.6  |                                      |              |                            |
| 6                     | VX2243 | 0.15                                       | 26                                   | 1.10         |                            |
|                       | VX2343 | 0.35                                       |                                      |              |                            |

• Refer to "Glossary of Terms" on page 26 for details on the max. operating pressure differential and the max. system pressure.

**Fluid and Ambient Temperature**

| Fluid temperature (°C)       |         | Ambient temperature (°C) |
|------------------------------|---------|--------------------------|
| Solenoid valve option symbol |         |                          |
| Nil, G, L                    | E, P    |                          |
| 1 to 60                      | 1 to 99 | −20 to 60                |

Note) With no freezing

**Valve Leakage Rate**

**Internal Leakage**

| Seal material  | Leakage rate (Water)             |
|----------------|----------------------------------|
| NBR, FKM, EPDM | 0.1 cm <sup>3</sup> /min or less |

**External Leakage**

| Seal material  | Leakage rate (Water)             |
|----------------|----------------------------------|
| NBR, FKM, EPDM | 0.1 cm <sup>3</sup> /min or less |

## How to Order (Solenoid Valve for Manifold)

**Model** Refer to the table (1) shown below for availability.

**Valve/Body configuration**

|   |                     |
|---|---------------------|
| 1 | N.C. (For manifold) |
| 3 | N.O. (For manifold) |

**Orifice diameter** Refer to the table (1) shown below for availability.

**Solenoid valve option** Refer to the table (2)-(1) shown below for availability.

**Suffix**

|     |                |
|-----|----------------|
| Nil | —              |
| Z   | Oil-free spec. |

Select nil because the solenoid valve option "L" is the oil-free treatment. Class B oil-free AC coils are applicable to the full-wave rectifier type only. Select the full-wave rectifier type.

**Rated voltage**

|   |                  |   |                  |
|---|------------------|---|------------------|
| 1 | 100 VAC 50/60 Hz | 6 | 12 VDC           |
| 2 | 200 VAC 50/60 Hz | 7 | 240 VAC 50/60 Hz |
| 3 | 110 VAC 50/60 Hz | 8 | 48 VAC 50/60 Hz  |
| 4 | 220 VAC 50/60 Hz | J | 230 VAC 50/60 Hz |
| 5 | 24 VDC           |   |                  |

\* Refer to the table (3) shown below for availability.

Refer to page 56 for ordering coil only.

**Electrical entry**

G - Grommet  
GS - With grommet surge voltage suppressor

C - Conduit

D - DIN terminal  
DS - DIN terminal with surge voltage suppressor  
DL - DIN terminal with light  
DZ - DIN terminal with surge voltage suppressor and light  
DO - For DIN terminal (without connector, gasket is included.)

T - With conduit terminal  
TS - With conduit terminal and surge voltage suppressor  
TL - With conduit terminal and light  
TZ - With conduit terminal, surge voltage suppressor and light

**Full-wave rectifier**

|     |  |
|-----|--|
| Nil | None   |
| R   | Built-in full-wave rectifier type (Class B only) |

\* DIN type is available with class B only.

## How to Order Manifold Bases

**VVX21**  
**VVX22**  
**VVX23**

**Port size (OUT port)**

|   |        |
|---|--------|
| 1 | Rc 1/8 |
| 2 | Rc 1/4 |

\* All IN ports are Rc 3/8.

**Manifold base**

**Thread type**

|     |      |
|-----|------|
| Nil | Rc   |
| T   | NPTF |
| F   | G    |
| N   | NPT  |

**Number of manifolds**

|     |             |
|-----|-------------|
| 02  | 2 stations  |
| ... | ...         |
| 10  | 10 stations |

**Suffix**

|     |                |
|-----|----------------|
| Nil | —              |
| Z   | Oil-free spec. |

**Base, Seal material** Refer to the table (2)-(2).

**Blanking plate part no.**

For VX21: VVX21-3A —  
For VX22: VVX22-3A —  
For VX23: VVX23-3A —

**Seal material**

|     |      |
|-----|------|
| Nil | NBR  |
| F   | FKM  |
| E   | EPDM |

## How to Order Manifold Assemblies (Example)

Enter the valve and blanking plate to be mounted under the manifold base part number.

Example  
VVX211C-05-1 ..... 1 set    "\*" is the symbol for mounting.  
\* VVX2111-1G1 ..... 4 sets    Add an "\*" in front of the part numbers  
\* VVX21-3A ..... 1 set    for solenoid valves, etc. to be mounted.

①—②—③—④—⑤—⑥

Enter the product's part number in order, counting the 1st station from the left in the manifold arrangement, when viewing the individual port in front.

Table (1) Model/Orifice Diameter

| Solenoid valve | Orifice symbol (Diameter) |              |                |              |
|----------------|---------------------------|--------------|----------------|--------------|
|                | 1<br>(2 mmø)              | 2<br>(2 mmø) | 3<br>(4.5 mmø) | 4<br>(6 mmø) |
| VX21           | ●                         | ●            | ●              | —            |
| VX22           | —                         | ●            | ●              | ●            |
| VX23           | —                         | ●            | ●              | ●            |

Table (2) Solenoid Valve Option

| Solenoid valve option symbol (1) | Base, Seal material symbol (2) | Body, Base/Shading coil material | Seal material | Coil insulation type | Note                     |
|----------------------------------|--------------------------------|----------------------------------|---------------|----------------------|--------------------------|
| Nil                              | C                              | Brass(C37)/Cu                    | NBR           | B                    | —                        |
| G                                | S                              | Stainless steel/Ag               | NBR           | B                    | —                        |
| E                                | CE                             | Brass(C37)/Cu                    | EPDM          | H                    | Heated water (AC only)   |
| P                                | SE                             | Stainless steel/Ag               | EPDM          | H                    | Heated water (AC only)   |
| L                                | SF                             | Stainless steel/Ag               | FKM           | B                    | High corrosive, Oil-free |

\* c/us : Coil insulation type Class H is not available.

Table (3) Rated Voltage – Electrical Option

| Rated voltage |                | Class B |                               |            | Class H                             |                               |                                     |
|---------------|----------------|---------|-------------------------------|------------|-------------------------------------|-------------------------------|-------------------------------------|
|               |                | S       | L                             | Z          | S                                   | L                             | Z                                   |
| AC/DC         | Voltage symbol | Voltage | With surge voltage suppressor | With light | With light/surge voltage suppressor | With surge voltage suppressor | With light/surge voltage suppressor |
|               | 1              | 100 V   | ●                             | ●          | ●                                   | ●                             | ●                                   |
|               | 2              | 200 V   | ●                             | ●          | ●                                   | ●                             | ●                                   |
|               | 3              | 110 V   | ●                             | ●          | ●                                   | ●                             | ●                                   |
|               | 4              | 220 V   | ●                             | ●          | ●                                   | ●                             | ●                                   |
|               | 7              | 240 V   | ●                             | —          | —                                   | ●                             | —                                   |
|               | 8              | 48 V    | ●                             | —          | —                                   | ●                             | —                                   |
| DC            | J              | 230 V   | ●                             | —          | —                                   | ●                             | —                                   |
|               | 5              | 24 V    | ●                             | ●          | ●                                   | DC spec. is not available.    |                                     |
|               | 6              | 12 V    | ●                             | —          | —                                   |                               |                                     |

\* Option "S", "Z" are not available as surge voltage suppressor is integrated into the AC/Class B, as a standard.

Dimensions → page 55 (Manifold)




## For Oil/Single Unit

### Model/Valve Specifications


#### N.C.

Passage symbol



#### N.O.

Passage symbol



#### Normally Closed (N.C.)

| Port size | Orifice dia. (mmø) | Model     | Max. operating pressure differential (MPa) |  | Flow characteristics                 |              | Max. system pressure (MPa) | Note) Mass (g)                         |
|-----------|--------------------|-----------|--|--|--------------------------------------|--------------|----------------------------|--|
|           |                    |           | AC   | DC<br>AC (Built-in full-wave rectifier type) |                                      |              |                            |  |
|           |                    |           |  |  | Av x 10 <sup>-6</sup> m <sup>2</sup> | Cv converted |                            |  |
| 1/8 (6A)  | 2                  | VX2110-01 | 1.5  | 1.5  | 4.1                                  | 0.17         | 3.0                        | 300                                    |
|           | 3                  | VX2120-01 | 0.5  | 0.5  | 7.9                                  | 0.33         |                            |  |
|           | 4.5                | VX2130-01 | 0.2  | 0.15   | 15                                   | 0.61         |                            |  |
| 1/4 (8A)  | 2                  | VX2110-02 | 1.5  | 1.5  | 4.1                                  | 0.17         | 3.0                        | 470<br>620<br>300<br>470<br>620<br>470 |
|           | 3                  | VX2120-02 | 0.5  | 0.5  | 7.9                                  | 0.33         |                            |  |
|           |                    | VX2220-02 | 1.2  | 1.2  |                                      |              |                            |  |
|           |                    | VX2320-02 | 1.7  | 2.0  |                                      |              |                            |  |
|           | 4.5                | VX2130-02 | 0.2  | 0.15   | 15                                   | 0.61         |                            |  |
|           |                    | VX2230-02 | 0.35                                       | 0.3  |                                      |              |                            |  |
|           |                    | VX2330-02 | 0.55                                       | 0.85   |                                      |              |                            |  |
|           | 6                  | VX2240-02 | 0.2  | 0.1  | 26                                   | 1.10         | 620<br>620                 |  |
|           |                    | VX2340-02 | 0.35                                       | 0.3  |                                      |              |                            |  |
|           | 8                  | VX2250-02 | 0.1  | 0.08   | 38                                   | 1.60         | 1.0                        | 560<br>700<br>560<br>700               |
|           |                    | VX2350-02 | 0.14                                       | 0.2  |                                      |              |                            |  |
|           |                    | 10        | VX2260-02                                  | 0.05   |                                      |              |                            |  |
| VX2360-02 | 0.08               | 0.07      |  |  |                                      |              |                            |  |
| 3/8 (10A) | 3                  | VX2220-03 | 1.2  | 1.2  | 7.9                                  | 0.33         | 3.0                        | 470<br>620<br>470<br>620<br>470<br>620 |
|           |                    | VX2320-03 | 1.7  | 2.0  |                                      |              |                            |  |
|           | 4.5                | VX2230-03 | 0.35                                       | 0.3  | 15                                   | 0.61         |                            |  |
|           |                    | VX2330-03 | 0.55                                       | 0.85   |                                      |              |                            |  |
|           | 6                  | VX2240-03 | 0.2  | 0.1  | 26                                   | 1.10         |                            |  |
|           |                    | VX2340-03 | 0.35                                       | 0.3  |                                      |              |                            |  |
|           | 8                  | VX2250-03 | 0.1  | 0.08   | 38                                   | 1.60         | 1.0                        | 560<br>700<br>560<br>700<br>560<br>700 |
|           |                    | VX2350-03 | 0.14                                       | 0.2  |                                      |              |                            |  |
|           | 10                 | VX2260-03 | 0.05                                       | 0.03   | 53                                   | 2.20         |                            |  |
|           |                    | VX2360-03 | 0.08                                       | 0.07   |                                      |              |                            |  |
| 1/2 (15A) | 10                 | VX2260-04 | 0.05                                       | 0.03   | 53                                   | 2.20         |                            |  |
|           |                    | VX2360-04 | 0.08                                       | 0.07   |                                      |              |                            |  |

Note) Mass of grommet type. Add 10 g for conduit type, 30 g for DIN terminal type, and 60 g for conduit terminal type respectively.

- Refer to "Glossary of Terms" on page 26 for details on the max. operating pressure differential and the max. system pressure.

### Fluid and Ambient Temperature

| Fluid temperature (°C)       |                            | Ambient temperature<br>(°C) |
|------------------------------|----------------------------|-----------------------------|
| Solenoid valve option symbol |                            |                             |
| A, H                         | D, N                       |                             |
| -5 <sup>Note)</sup> to 60    | -5 <sup>Note)</sup> to 120 | -20 to 60                   |

Note) Dynamic viscosity: 50 mm<sup>2</sup>/s or less

### ⚠ When the fluid is oil.

The dynamic viscosity of the fluid must not exceed 50 mm<sup>2</sup>/s.

The special construction of the armature adopted in the built-in full-wave rectifier type gives an improvement in OFF response by providing clearance on the absorbed surface when it is switched ON.

Select the DC spec. or AC spec. built-in full-wave rectifier type when the dynamic viscosity is higher than water or when the OFF response is prioritized.

#### Normally Closed (N.C.)

| Port size   | Orifice dia.<br>(mmø) | Model     | Max. operating pressure differential (MPa) | Flow characteristics                 |              | Max. system pressure (MPa) | Note)<br>Mass (g) |
|-------------|-----------------------|-----------|--|--------------------------------------|--------------|----------------------------|-------------------|
|             |                       |           | AC, DC                                     | Av x 10 <sup>-6</sup> m <sup>2</sup> | Cv converted |                            |                   |
| 1/8<br>(6A) | 2                     | VX2112-01 | 0.8  | 4.1                                  | 0.17         | 3.0                        | 320               |
|             | 3                     | VX2122-01 | 0.45                                       | 7.9                                  | 0.33         |                            |                   |
|             | 4.5                   | VX2132-01 | 0.2  | 15                                   | 0.61         |                            |                   |
| 2           | VX2112-02             | 0.8       | 4.1  | 0.17                                 |              |                            |                   |
| 1/4<br>(8A) | 3                     | VX2122-02 | 0.45                                       | 7.9                                  | 0.33         |                            | 500               |
|             |                       | VX2222-02 | 0.7  |                                      |              |                            | 660               |
|             |                       | VX2322-02 | 1.0  |                                      |              |                            | 320               |
|             | 4.5                   | VX2132-02 | 0.2  | 15                                   | 0.61         |                            | 500               |
|             |                       | VX2232-02 | 0.3  |                                      |              |                            | 660               |
|             |                       | VX2332-02 | 0.6  |                                      |              |                            | 500               |
|             | 6                     | VX2242-02 | 0.15                                       | 26                                   | 1.10         |                            | 660               |
|             |                       | VX2342-02 | 0.35                                       |                                      |              |                            | 500               |
|             | 3/8<br>(10)           | 3         | VX2222-03                                  | 0.7                                  | 7.9          |                            | 0.33              |
| VX2322-03   |                       |           | 1.0  | 500                                  |              |                            |                   |
| 4.5         |                       | VX2232-03 | 0.3  | 15                                   | 0.61         |                            | 660               |
|             |                       | VX2332-03 | 0.6  |                                      |              | 500                        |                   |
| 6           |                       | VX2242-03 | 0.15                                       | 26                                   | 1.10         | 660                        |                   |
|             |                       | VX2342-03 | 0.35                                       |                                      |              | 660                        |                   |

Note) Mass of grommet type. Add 10 g for conduit type, 30 g for DIN terminal type, and 60 g for conduit terminal type respectively.

- Refer to "Glossary of Terms" on page 26 for details on the max. operating pressure differential and the max. system pressure.

### Valve Leakage Rate

#### Internal Leakage

| Seal material | Leakage rate (Oil)               |
|---------------|----------------------------------|
| FKM           | 0.1 cm <sup>3</sup> /min or less |

#### External Leakage

| Seal material | Leakage rate (Oil)               |
|---------------|----------------------------------|
| FKM           | 0.1 cm <sup>3</sup> /min or less |

# Direct Operated 2 Port Solenoid Valve **Series VX21/22/23**

For Oil/Single Unit

## How to Order (Single Unit)

**Model** Refer to the table (1) shown below for availability.

**Orifice diameter** Refer to the table (1) shown below for availability.

**Valve/Body configuration**

|   |                    |
|---|--------------------|
| 0 | N.C. / Single unit |
| 2 | N.O. / Single unit |

**Solenoid valve option** Refer to the table (2) shown below for availability.

**Suffix**

|     |                |
|-----|----------------|
| Nil | —              |
| Z   | Oil-free spec. |

Class B oil-free AC coils are applicable to the full-wave rectifier type only.  
Select the full-wave rectifier type.

**Thread type**

|     |      |
|-----|------|
| Nil | Rc   |
| T   | NPTF |
| F   | G    |
| N   | NPT  |

**Port size** Refer to the table (1) shown below for availability.

**Rated voltage**

|   |                  |   |                  |
|---|------------------|---|------------------|
| 1 | 100 VAC 50/60 Hz | 6 | 12 VDC           |
| 2 | 200 VAC 50/60 Hz | 7 | 240 VAC 50/60 Hz |
| 3 | 110 VAC 50/60 Hz | 8 | 48 VAC 50/60 Hz  |
| 4 | 220 VAC 50/60 Hz | J | 230 VAC 50/60 Hz |
| 5 | 24 VDC           |   |                  |

\* Refer to the table (3) shown below for availability.

Refer to page 56 for ordering coil only.

**Full-wave rectifier**

|     |  |
|-----|--|
| Nil | None   |
| R   | Built-in full-wave rectifier type (Class B only) |

**Bracket**

|     |              |
|-----|--------------|
| Nil | None         |
| B   | With bracket |

\* VX021N-12A and VX022N-12A are packed in the same container as the main body.  
\* Refer to the table (4) if a bracket is ordered separately.

**Electrical entry**

**G - Grommet**  
**GS - With grommet surge voltage suppressor**

**C-Conduit**

**Connector**

**T** -With conduit terminal  
**TS** -With conduit terminal and surge voltage suppressor  
**TL** -With conduit terminal and light  
**TZ** -With conduit terminal, surge voltage suppressor and light

**D** -DIN terminal  
**DS** -DIN terminal with surge voltage suppressor  
**DL** -DIN terminal with light  
**DZ** -DIN terminal with surge voltage suppressor and light  
**DO** -For DIN terminal (without connector, gasket is included.)

\* DIN type is available with class B only.

**Table (1) Model/Orifice Diameter/Port Size**  
**Normally Closed (N.C.)**

| Solenoid valve (Port size) |          |          |          | Orifice symbol (Diameter) |              |                |              |              |               |
|----------------------------|----------|----------|----------|---------------------------|--------------|----------------|--------------|--------------|---------------|
| Model                      | VX21     | VX22     | VX23     | 1<br>(2 mmø)              | 2<br>(3 mmø) | 3<br>(4.5 mmø) | 4<br>(6 mmø) | 5<br>(8 mmø) | 6<br>(10 mmø) |
| Port no.<br>(Port size)    | 01 (1/8) | —        | —        | ●                         | ●            | ●              | —            | —            | —             |
|                            | 02 (1/4) | —        | —        | ●                         | ●            | ●              | —            | —            | —             |
|                            | —        | 02 (1/4) | 02 (1/4) | —                         | ●            | ●              | ●            | ●            | ●             |
|                            | —        | 03 (3/8) | 03 (3/8) | —                         | ●            | ●              | ●            | ●            | ●             |
|                            | —        | 04 (1/2) | 04 (1/2) | —                         | —            | —              | —            | —            | ●             |

**Normally Open (N.O.)**

| Solenoid valve (Port size) |          |          |          | Orifice symbol (Diameter) |              |                |              |
|----------------------------|----------|----------|----------|---------------------------|--------------|----------------|--------------|
| Model                      | VX21     | VX22     | VX23     | 1<br>(2 mmø)              | 2<br>(3 mmø) | 3<br>(4.5 mmø) | 4<br>(6 mmø) |
| Port no.<br>(Port size)    | 01 (1/8) | —        | —        | ●                         | ●            | ●              | —            |
|                            | 02 (1/4) | —        | —        | ●                         | ●            | ●              | —            |
|                            | —        | 02 (1/4) | 02 (1/4) | —                         | ●            | ●              | ●            |
|                            | —        | 03 (3/8) | 03 (3/8) | —                         | ●            | ●              | ●            |

**Table (3) Rated Voltage – Electrical Option**

| Rated voltage |                |         | Class B                            |                 |  | Class H                            |                 |  |
|---------------|----------------|---------|------------------------------------|-----------------|--|------------------------------------|-----------------|--|
| AC/DC         | Voltage symbol | Voltage | S<br>With surge voltage suppressor | L<br>With light | Z<br>With light/surge voltage suppressor | S<br>With surge voltage suppressor | L<br>With light | Z<br>With light/surge voltage suppressor |
| AC            | 1              | 100 V   | ●                                  | ●               | ●  | ●                                  | ●               | ●  |
|               | 2              | 200 V   | ●                                  | ●               | ●  | ●                                  | ●               | ●  |
|               | 3              | 110 V   | ●                                  | ●               | ●  | ●                                  | ●               | ●  |
|               | 4              | 220 V   | ●                                  | ●               | ●  | ●                                  | ●               | ●  |
|               | 7              | 240 V   | ●                                  | —               | —  | ●                                  | —               | —  |
|               | 8              | 48 V    | ●                                  | —               | —  | ●                                  | —               | —  |
|               | J              | 230 V   | ●                                  | —               | —  | ●                                  | —               | —  |
| DC            | 5              | 24 V    | ●                                  | ●               | ●  | DC spec. is not available.         |                 |  |
|               | 6              | 12 V    | ●                                  | —               | —  |                                    |                 |  |

\* Option "S", "Z" are not available as surge voltage suppressor is integrated into the AC/Class B, as a standard.

**Table (2) Solenoid Valve Option**

| Option symbol | Seal material | Body/Shading coil material | Coil insulation type |
|---------------|---------------|----------------------------|----------------------|
| A             | FKM           | Brass (C37)/Cu             | B                    |
| H             |               | Stainless steel/Ag         |                      |
| D             |               | Brass (C37)/Cu             | H                    |
| N             |               | Stainless steel/Ag         |                      |

The additives contained in oil are different depending on the type and manufacturers, so the durability of the seal materials will vary. For details, please consult with SMC.

\* **us** : Coil insulation type Class H is not available.

**Table (4) Bracket Part No.**

| Model               | Part no.     |
|---------------------|--------------|
| VX21 <sub>3</sub> 0 | VX021N-12A   |
| VX22 <sub>4</sub> 0 | VX022N-12A   |
| VX23 <sub>4</sub> 0 |              |
| VX22 <sub>6</sub> 0 | VX023N-12A-L |
| VX23 <sub>6</sub> 0 |              |


Dimensions → page 52 (Single unit)

## For Oil/Manifold

### Solenoid Valve for Manifold/Valve Specifications

**N.C.**


Passage symbol




Common SUP type

**N.O.**

Passage symbol



Common SUP type



**⚠ When the fluid is oil.**

The dynamic viscosity of the fluid must not exceed 50 mm<sup>2</sup>/s.

The special construction of the armature adopted in the built-in full-wave rectifier type gives an improvement in OFF response by providing clearance on the absorbed surface when it is switched ON.

Select the DC spec. or AC spec. built-in full-wave rectifier type when the dynamic viscosity is higher than water or when the OFF response is prioritized.

#### Normally Closed (N.C.)

| Orifice dia. (mmø) | Model  | Max. operating pressure differential (MPa) |   | Flow characteristics |      | Max. system pressure (MPa) |
|--------------------|--------|--|---|----------------------|------|----------------------------|
|                    |        | AC   | DC AC (Built-in full-wave rectifier type) |                      |      |                            |
| 2                  | VX2111 | 1.5  | 1.5                                       | 4.1                  | 0.17 | 3.0                        |
|                    | VX2121 | 0.5  | 0.5                                       |                      |      |                            |
| 3                  | VX2221 | 1.2  | 1.2                                       | 7.9                  | 0.33 |                            |
|                    | VX2321 | 1.7  | 2.0                                       |                      |      |                            |
| 4.5                | VX2131 | 0.2  | 0.15                                      | 15                   | 0.61 |                            |
|                    | VX2231 | 0.35                                       | 0.3                                       |                      |      |                            |
|                    | VX2331 | 0.55                                       | 0.85                                      |                      |      |                            |
| 6                  | VX2241 | 0.2  | 0.1                                       | 26                   | 1.10 |                            |
|                    | VX2341 | 0.35                                       | 0.3                                       |                      |      |                            |



• Refer to "Glossary of Terms" on page 26 for details on the max. operating pressure differential and the max. system pressure.

#### Normally Open (N.O.)

| Orifice dia. (mmø) | Model  | Max. operating pressure differential (MPa) | Flow characteristics |      | Max. system pressure (MPa) |
|--------------------|--------|--|----------------------|------|----------------------------|
|                    |        | AC, DC                                     |                      |      |                            |
| 2                  | VX2113 | 0.8  | 4.1                  | 0.17 | 3.0                        |
|                    | VX2123 | 0.45                                       |                      |      |                            |
| 3                  | VX2223 | 0.7  | 7.9                  | 0.33 |                            |
|                    | VX2323 | 1.0  |                      |      |                            |
| 4.5                | VX2133 | 0.2  | 15                   | 0.61 |                            |
|                    | VX2233 | 0.3  |                      |      |                            |
|                    | VX2333 | 0.6  |                      |      |                            |
| 6                  | VX2243 | 0.15                                       | 26                   | 1.10 |                            |
|                    | VX2343 | 0.35                                       |                      |      |                            |



• Refer to "Glossary of Terms" on page 26 for details on the max. operating pressure differential and the max. system pressure.

### Fluid and Ambient Temperature

| Fluid temperature (°C)       |                            | Ambient temperature<br>(°C) |
|------------------------------|----------------------------|-----------------------------|
| Solenoid valve option symbol |                            |                             |
| A, H                         | D, N                       |                             |
| −5 <sup>Note)</sup> to 60    | −5 <sup>Note)</sup> to 120 | −20 to 60                   |



Note) Dynamic viscosity: 50 mm<sup>2</sup>/s or less

### Valve Leakage Rate

#### Internal Leakage

| Seal material | Leakage rate (Oil)               |
|---------------|----------------------------------|
| FKM           | 0.1 cm <sup>3</sup> /min or less |

#### External Leakage

| Seal material | Leakage rate (Oil)               |
|---------------|----------------------------------|
| FKM           | 0.1 cm <sup>3</sup> /min or less |



## How to Order (Solenoid Valve for Manifold)

**Model** AC VX 21 2 1 A - 1 G R 1  
 DC VX 21 2 1 A - 5 G 1

**Valve/Body configuration**

|   |                     |
|---|---------------------|
| 1 | N.C. (For manifold) |
| 3 | N.O. (For manifold) |

**Orifice diameter**  
 Refer to the table (1) shown below for availability.

**Solenoid valve option**  
 Refer to the table (2)-(1) shown below for availability.

**Rated voltage**

|   |                  |   |                  |
|---|------------------|---|------------------|
| 1 | 100 VAC 50/60 Hz | 6 | 12 VDC           |
| 2 | 200 VAC 50/60 Hz | 7 | 240 VAC 50/60 Hz |
| 3 | 110 VAC 50/60 Hz | 8 | 48 VAC 50/60 Hz  |
| 4 | 220 VAC 50/60 Hz | J | 230 VAC 50/60 Hz |
| 5 | 24 VDC           |   |                  |

**Suffix**

|     |                |
|-----|----------------|
| Nil | —              |
| Z   | Oil-free spec. |

Class B oil-free AC coils are applicable to the full-wave rectifier type only. Select the full-wave rectifier type.

**Full-wave rectifier**

|     |  |
|-----|--|
| Nil | None   |
| R   | Built-in full-wave rectifier type (Class B only) |

**Electrical entry**

G - Grommet  
 GS - With grommet surge voltage suppressor

C - Conduit

D - DIN terminal  
 DS - DIN terminal with surge voltage suppressor  
 DL - DIN terminal with light  
 DZ - DIN terminal with surge voltage suppressor and light  
 DO - For DIN terminal (without connector, gasket is included.)

T - With conduit terminal  
 TS - With conduit terminal and surge voltage suppressor  
 TL - With conduit terminal and light  
 TZ - With conduit terminal, surge voltage suppressor and light

\* Refer to the table (3) shown below for availability.

Refer to page 56 for ordering coil only.

\* DIN type is available with class B only.

## How to Order Manifold Bases

**VVX21**  
**VVX22** 1 - CF - 07 - 1  
**VVX23**

**Number of manifolds**

|    |             |
|----|-------------|
| 02 | 2 stations  |
| 10 | 10 stations |

**Port size (OUT port)**

|   |        |
|---|--------|
| 1 | Rc 1/8 |
| 2 | Rc 1/4 |

\* All IN ports are Rc 3/8.

**Thread type**

|     |      |
|-----|------|
| Nil | Rc   |
| T   | NPTF |
| F   | G    |
| N   | NPT  |

**Suffix**

|     |                |
|-----|----------------|
| Nil | —              |
| Z   | Oil-free spec. |

**Base, Seal material**  
 Refer to the table (2)-(2).

**Manifold base**

**Blanking plate part no.**  
 For VX21: VVX21-3A-F  
 For VX22: VVX22-3A-F  
 For VX23: VVX23-3A-F

**Seal material: FKM**


## How to Order Manifold Assemblies (Example)

Enter the valve and blanking plate to be mounted under the manifold base part number.

Example

VVX211CF-05-1 ..... 1 set    "\*" is the symbol for mounting.  
 \* VX2111A-1G1 ..... 4 sets    Add an "\*" in front of the part numbers  
 \* VVX21-3A-F ..... 1 set    for solenoid valves, etc. to be mounted.

① — ② — ③ — ④ — ⑤ — ⑥

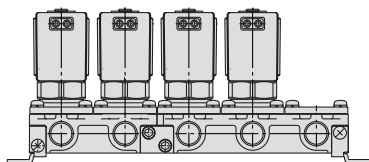

Enter the product's part number in order, counting the 1st station from the left in the manifold arrangement, when viewing the individual port in front.

Table (1) Model/Orifice Diameter

| Solenoid valve | Orifice symbol (Diameter) |              |                |              |
|----------------|---------------------------|--------------|----------------|--------------|
|                | 1<br>(2 mmø)              | 2<br>(3 mmø) | 3<br>(4.5 mmø) | 4<br>(6 mmø) |
| VX21           | ●                         | ●            | ●              | —            |
| VX22           | —                         | ●            | ●              | ●            |
| VX23           | —                         | ●            | ●              | ●            |

Table (2) Solenoid Valve Option

| Solenoid valve option symbol (1) | Base, Seal material symbol (2) | Body, Base/ Shading coil material | Seal material | Coil insulation type | Note    |
|----------------------------------|--------------------------------|-----------------------------------|---------------|----------------------|---------|
| A                                | CF                             | Brass (C37)/Cu                    | FKM           | B                    | —       |
| H                                | SF                             | Stainless steel/Ag                |               | H                    | AC only |
| D                                | CF                             | Brass (C37)/Cu                    |               |                      |         |
| N                                | SF                             | Stainless steel/Ag                |               |                      |         |

The additives contained in oil are different depending on the type and manufacturers, so the durability of the seal materials will vary. For details, please consult with SMC.

\* eus : Coil insulation type Class H is not available.

Table (3) Rated Voltage – Electrical Entry – Electrical Option

| Rated voltage |                |         | Class B                            |                 |   | Class H                            |                 |   |
|---------------|----------------|---------|------------------------------------|-----------------|---|------------------------------------|-----------------|---|
| AC/ DC        | Voltage symbol | Voltage | S<br>With surge voltage suppressor | L<br>With light | Z<br>With light/ surge voltage suppressor | S<br>With surge voltage suppressor | L<br>With light | Z<br>With light/ surge voltage suppressor |
| AC            | 1              | 100 V   | ●                                  | ●               | ●   | ●                                  | ●               | ●   |
|               | 2              | 200 V   | ●                                  | ●               | ●   | ●                                  | ●               | ●   |
|               | 3              | 110 V   | ●                                  | ●               | ●   | ●                                  | ●               | ●   |
|               | 4              | 220 V   | ●                                  | ●               | ●   | ●                                  | ●               | ●   |
|               | 7              | 240 V   | ●                                  | —               | —   | ●                                  | —               | —   |
|               | 8              | 48 V    | ●                                  | —               | —   | ●                                  | —               | —   |
|               | J              | 230 V   | ●                                  | —               | —   | ●                                  | —               | —   |
| DC            | 5              | 24 V    | ●                                  | ●               | ●   | DC spec. is not available.         |                 |   |
|               | 6              | 12 V    | ●                                  | —               | —   |                                    |                 |   |

\* Option "S", "Z" are not available as surge voltage suppressor is integrated into the AC/Class B, as a standard.


Dimensions → page 55 (Manifold)

## For Steam/Single Unit

### Model/Valve Specifications


#### N.C.

Passage symbol



#### N.O.

Passage symbol



#### Normally Closed (N.C.)

| Port size | Orifice dia. (mmø) | Model     | Max. operating pressure differential (MPa) | Flow characteristics                 |              | Max. system pressure (MPa) | Note) Mass (g) |
|-----------|--------------------|-----------|--|--------------------------------------|--------------|----------------------------|----------------|
|           |                    |           | AC   | Av x 10 <sup>-6</sup> m <sup>2</sup> | Cv converted |                            |                |
| 1/8 (6A)  | 2                  | VX2110-01 | 1.0  | 4.1                                  | 0.17         | 1.0                        | 300            |
|           | 3                  | VX2120-01 | 1.0  | 7.9                                  | 0.33         |                            |                |
|           | 4.5                | VX2130-01 | 0.45                                       | 15                                   | 0.61         |                            |                |
| 1/4 (8A)  | 2                  | VX2110-02 | 1.0  | 4.1                                  | 0.17         |                            |                |
|           | 3                  | VX2120-02 | 1.0  | 7.9                                  | 0.33         |                            |                |
|           |                    | VX2130-02 | 0.45                                       |                                      |              |                            |                |
|           | 4.5                | VX2230-02 | 0.75                                       | 15                                   | 0.61         |                            | 470            |
|           |                    | VX2330-02 | 1.0  |                                      |              |                            | 620            |
|           |                    | VX2240-02 | 0.4  |                                      |              |                            | 470            |
|           | 6                  | VX2340-02 | 0.5  | 26                                   | 1.10         |                            | 620            |
|           |                    | VX2250-02 | 0.15                                       |                                      |              | 0.5                        | 560            |
|           |                    | VX2350-02 | 0.2  | 38                                   | 1.60         |                            | 700            |
|           | 8                  | VX2260-02 | 0.08                                       |                                      |              |                            | 560            |
|           |                    | VX2360-02 | 0.1  | 46                                   | 1.90         |                            | 700            |
|           | 10                 |           |  |                                      |              |                            |                |
| 3/8 (10A) | 3                  | VX2220-03 | 1.0  | 7.9                                  | 0.33         | 1.0                        | 470            |
|           |                    | VX2230-03 | 0.75                                       |                                      |              |                            | 470            |
|           |                    | VX2330-03 | 1.0  | 15                                   | 0.61         |                            | 620            |
|           | 6                  | VX2240-03 | 0.4  | 26                                   | 1.10         |                            | 470            |
|           |                    | VX2340-03 | 0.5  |                                      |              |                            | 620            |
|           |                    | VX2250-03 | 0.15                                       |                                      |              | 0.5                        | 560            |
|           | 8                  | VX2350-03 | 0.2  | 38                                   | 1.60         |                            | 700            |
|           |                    | VX2260-03 | 0.08                                       |                                      |              |                            | 560            |
|           |                    | VX2360-03 | 0.1  | 53                                   | 2.20         |                            | 700            |
|           | 10                 |           |  |                                      |              |                            |                |
| 1/2 (15A) |                    | VX2260-04 | 0.08                                       |                                      |              | 0.5                        | 560            |
|           |                    | VX2360-04 | 0.1  | 53                                   | 2.20         |                            | 700            |



Note) Mass of grommet type. Add 60 g for conduit terminal type.  
• Refer to "Glossary of Terms" on page 26 for details on the max. operating pressure differential and the max. system pressure.

#### Normally Open (N.O.)

| Port size | Orifice dia. (mmø) | Model     | Max. operating pressure differential (MPa) | Flow characteristics                 |              | Max. system pressure (MPa) | Note) Mass (g) |
|-----------|--------------------|-----------|--|--------------------------------------|--------------|----------------------------|----------------|
|           |                    |           | AC   | Av x 10 <sup>-6</sup> m <sup>2</sup> | Cv converted |                            |                |
| 1/8 (6A)  | 2                  | VX2112-01 | 1.0  | 4.1                                  | 0.17         | 1.0                        | 320            |
|           | 3                  | VX2122-01 | 0.7  | 7.9                                  | 0.33         |                            |                |
|           | 4.5                | VX2132-01 | 0.3  | 15                                   | 0.61         |                            |                |
| 1/4 (8A)  | 2                  | VX2112-02 | 1.0  | 4.1                                  | 0.17         |                            |                |
|           | 3                  | VX2122-02 | 0.7  |                                      |              |                            |                |
|           |                    | VX2222-02 | 1.0  | 7.9                                  | 0.33         |                            | 500            |
|           |                    | VX2132-02 | 0.3  |                                      |              |                            | 320            |
|           | 4.5                | VX2232-02 | 0.45                                       | 15                                   | 0.61         |                            | 500            |
|           |                    | VX2332-02 | 0.8  |                                      |              |                            | 660            |
|           | 6                  | VX2242-02 | 0.25                                       | 26                                   | 1.10         |                            | 500            |
|           |                    | VX2342-02 | 0.45                                       |                                      |              |                            | 660            |
|           | 3                  | VX2222-03 | 1.0  | 7.9                                  | 0.33         | 1.0                        | 500            |
|           |                    | VX2232-03 | 0.45                                       |                                      |              |                            |                |
|           | 4.5                | VX2332-03 | 0.8  | 15                                   | 0.61         |                            | 660            |
|           |                    | VX2242-03 | 0.25                                       | 26                                   | 1.10         |                            | 500            |
|           |                    | VX2342-03 | 0.45                                       |                                      |              |                            | 660            |



Note) Mass of grommet type. Add 60 g for conduit terminal type.  
• Refer to "Glossary of Terms" on page 26 for details on the max. operating pressure differential and the max. system pressure.

### Fluid and Ambient Temperature

| Max. fluid temperature (°C)  | Ambient temperature (°C) |
|------------------------------|--------------------------|
| Solenoid valve option symbol |                          |
| S, Q                         |                          |
| 183                          | -20 to 60                |

### Valve Leakage Rate

#### Internal Leakage

| Seal material | Leakage rate (Air)               |
|---------------|----------------------------------|
| PTFE          | 300 cm <sup>3</sup> /min or less |

#### External Leakage

| Seal material | Leakage rate (Air)             |
|---------------|--------------------------------|
| PTFE          | 1 cm <sup>3</sup> /min or less |

## How to Order (Single Unit)

AC    VX2120S    -01    -1G1-

**Model** • Refer to the table (1) shown below for availability.

**Orifice diameter** • Refer to the table (1) shown below for availability.

**Valve/Body configuration**

|   |                    |
|---|--------------------|
| 0 | N.C. / Single unit |
| 2 | N.O. / Single unit |

**Suffix**

|     |                |
|-----|----------------|
| Nil | —              |
| Z   | Oil-free spec. |

**Rated voltage**

|   |                  |   |                  |
|---|------------------|---|------------------|
| 1 | 100 VAC 50/60 Hz | 7 | 240 VAC 50/60 Hz |
| 2 | 200 VAC 50/60 Hz | 8 | 48 VAC 50/60 Hz  |
| 3 | 110 VAC 50/60 Hz | J | 230 VAC 50/60 Hz |
| 4 | 220 VAC 50/60 Hz |   |                  |

\* Refer to the table (3) shown below for availability.

Refer to page 56 for ordering coil only.

**Solenoid valve option** • Refer to the table (2) shown below for availability.

**Port size** • Refer to the table (1) shown below for availability.

**Thread type**

|     |      |
|-----|------|
| Nil | Rc   |
| T   | NPTF |
| F   | G    |
| N   | NPT  |

**Electrical entry**

**G** - Grommet

**GS** - With grommet surge voltage suppressor

**T** - With conduit terminal

**TS** - With conduit terminal and surge voltage suppressor

**TL** - With conduit terminal and light

**TZ** - With conduit terminal, surge voltage suppressor and light

**C** - Conduit

**Bracket**

|     |              |
|-----|--------------|
| Nil | None         |
| B   | With bracket |

\* VX021N-12A and VX022N-12A are packed in the same container as the main body.  
\* Refer to the table (4) if a bracket is ordered separately.

**Table (1) Model/Orifice Diameter/Port size**  
**Normally Closed (N.C.)**

| Solenoid valve (Port size) |          |          |          | Orifice symbol (Diameter) |              |                |              |              |               |
|----------------------------|----------|----------|----------|---------------------------|--------------|----------------|--------------|--------------|---------------|
| Model                      | VX21     | VX22     | VX23     | 1<br>(2 mmø)              | 2<br>(3 mmø) | 3<br>(4.5 mmø) | 4<br>(6 mmø) | 5<br>(8 mmø) | 6<br>(10 mmø) |
| Port no.<br>(Port size)    | 01 (1/8) | —        | —        | ●                         | ●            | ●              | —            | —            | —             |
|                            | 02 (1/4) | —        | —        | ●                         | ●            | ●              | —            | —            | —             |
|                            | —        | 02 (1/4) | 02 (1/4) | —                         | —            | ●              | ●            | ●            | ●             |
|                            | —        | 03 (3/8) | 03 (3/8) | —                         | ● (VX22)     | ●              | ●            | ●            | ●             |
|                            | —        | 04 (1/2) | 04 (1/2) | —                         | —            | —              | —            | —            | ●             |

**Normally Open (N.O.)**

| Solenoid valve (Port size) |          |          |          | Orifice symbol (Diameter) |              |                |              |
|----------------------------|----------|----------|----------|---------------------------|--------------|----------------|--------------|
| Model                      | VX21     | VX22     | VX23     | 1<br>(2 mmø)              | 2<br>(3 mmø) | 3<br>(4.5 mmø) | 4<br>(6 mmø) |
| Port no.<br>(Port size)    | 01 (1/8) | —        | —        | ●                         | ●            | ●              | —            |
|                            | 02 (1/4) | —        | —        | ●                         | ●            | ●              | —            |
|                            | —        | 02 (1/4) | 02 (1/4) | —                         | ●            | ●              | ●            |
|                            | —        | 03 (3/8) | 03 (3/8) | —                         | ●            | ●              | ●            |

**Table (2) Solenoid Valve Option**

| Option symbol | Seal material | Body/Shading coil material | Coil insulation type |
|---------------|---------------|----------------------------|----------------------|
| S             | PTFE          | Brass (C37)/Cu             | H                    |
| Q             |               | Stainless steel/Ag         |                      |

Solenoid coil: AC/Class H only

\* : Coil insulation type Class H is not available.

**Table (3) Rated Voltage – Electrical Option**

| Rated voltage |                |         | Class H                       |            |                                     |
|---------------|----------------|---------|-------------------------------|------------|-------------------------------------|
| AC/DC         | Voltage symbol | Voltage | With surge voltage suppressor | With light | With light/surge voltage suppressor |
| AC            | 1              | 100 V   | ●                             | ●          | ●                                   |
|               | 2              | 200 V   | ●                             | ●          | ●                                   |
|               | 3              | 110 V   | ●                             | ●          | ●                                   |
|               | 4              | 220 V   | ●                             | ●          | ●                                   |
|               | 7              | 240 V   | ●                             | —          | —                                   |
|               | 8              | 48 V    | ●                             | —          | —                                   |
|               | J              | 230 V   | ●                             | —          | —                                   |
| DC            | 5              | 24 V    | DC spec. is not available.    |            |                                     |
|               | 6              | 12 V    |                               |            |                                     |


**Table (4) Bracket Part No.**

| Model                            | Part no.     |
|----------------------------------|--------------|
| VX21 <sup>1</sup> <sub>3</sub> 0 | VX021N-12A   |
| VX22 <sup>2</sup> <sub>3</sub> 0 | VX022N-12A   |
| VX23 <sup>2</sup> <sub>4</sub> 0 |              |
| VX22 <sup>5</sup> <sub>6</sub> 0 | VX023N-12A-L |
| VX23 <sup>5</sup> <sub>6</sub> 0 |              |


**For Steam/Manifold**

**Solenoid Valve for Manifold/Valve Specifications**

**N.C.**



**N.O.**



**Normally Closed (N.C.)**

| Orifice dia.<br>(mmø) | Model  | Max. operating pressure differential (MPa) | Flow characteristics                 |              | Max. system pressure (MPa) |
|-----------------------|--------|--|--------------------------------------|--------------|----------------------------|
|                       |        | AC   | Av x 10 <sup>-6</sup> m <sup>2</sup> | Cv converted |                            |
| 2                     | VX2111 | 1.0  | 4.1                                  | 0.17         | 3.0                        |
| 3                     | VX2121 | 1.0  | 7.9                                  | 0.33         |                            |
| 4.5                   | VX2131 | 0.45                                       | 15                                   | 0.61         |                            |
|                       | VX2231 | 0.75                                       |                                      |              |                            |
|                       | VX2331 | 1.0  |                                      |              |                            |
| 6                     | VX2241 | 0.4  | 26                                   | 1.10         |                            |
|                       | VX2341 | 0.5  |                                      |              |                            |



• Refer to “Glossary of Terms” on page 26 for details on the max. operating pressure differential and the max. system pressure.

**Normally Open (N.O.)**

| Orifice dia.<br>(mmø) | Model  | Max. operating pressure differential (MPa) | Flow characteristics                 |              | Max. system pressure (MPa) |
|-----------------------|--------|--|--------------------------------------|--------------|----------------------------|
|                       |        | AC   | Av x 10 <sup>-6</sup> m <sup>2</sup> | Cv converted |                            |
| 2                     | VX2113 | 1.0  | 4.1                                  | 0.17         | 3.0                        |
| 3                     | VX2123 | 0.7  | 7.9                                  | 0.33         |                            |
|                       | VX2223 | 1.0  |                                      |              |                            |
| 4.5                   | VX2133 | 0.3  | 15                                   | 0.61         |                            |
|                       | VX2233 | 0.45                                       |                                      |              |                            |
|                       | VX2333 | 0.8  |                                      |              |                            |
| 6                     | VX2243 | 0.25                                       | 26                                   | 1.10         |                            |
|                       | VX2343 | 0.45                                       |                                      |              |                            |



• Refer to “Glossary of Terms” on page 26 for details on the max. operating pressure differential and the max. system pressure.

**Fluid and Ambient Temperature**

| Power source | Max. fluid temperature (°C)                 | Ambient temperature (°C) |
|--------------|---|--------------------------|
|              | Solenoid valve option symbol<br><b>S, Q</b> |                          |
| AC           | 183   | -20 to 60                |

**Valve Leakage Rate**

**Internal Leakage**

| Seal material | Leakage rate (Air)               |
|---------------|----------------------------------|
| PTFE          | 300 cm <sup>3</sup> /min or less |

**External Leakage**

| Seal material | Leakage rate (Air)             |
|---------------|--------------------------------|
| PTFE          | 1 cm <sup>3</sup> /min or less |

## How to Order (Solenoid Valve for Manifold)

**AC VX21 23 S - 1 G 1**

**Model** • Refer to the table (1) shown below for availability.

**Orifice diameter** • Refer to the table (1) shown below for availability.

**Solenoid valve option** • Refer to the table (2)-(1) shown below for availability.

**Suffix** •

|     |                |
|-----|----------------|
| Nil | —              |
| Z   | Oil-free spec. |

**Rated voltage** •

|   |                  |   |                  |
|---|------------------|---|------------------|
| 1 | 100 VAC 50/60 Hz | 7 | 240 VAC 50/60 Hz |
| 2 | 200 VAC 50/60 Hz | 8 | 48 VAC 50/60 Hz  |
| 3 | 110 VAC 50/60 Hz | J | 230 VAC 50/60 Hz |
| 4 | 220 VAC 50/60 Hz |   |                  |

\* Refer to the table (3) shown below for availability.

Refer to page 56 for ordering coil only.

**Electrical entry**

|  |                    |
|--|--------------------|
| <b>G</b> - Grommet<br><b>GS</b> - With grommet surge voltage suppressor  | <b>C</b> - Conduit |
| <b>T</b> - With conduit terminal<br><b>TS</b> - With conduit terminal and surge voltage suppressor<br><b>TL</b> - With conduit terminal and light<br><b>TZ</b> - With conduit terminal, surge voltage suppressor and light |                    |

\* Refer to the table (3) for the available combinations between each electrical option (S, L, Z) and rated voltage.

\* us : Light and surge voltage suppressor are not available.

## How to Order Manifold Bases

**VVX21 VVX22 VVX23**

**1 CP - 07 - 1**

**Port size (OUT port)**

|   |        |
|---|--------|
| 1 | Rc 1/8 |
| 2 | Rc 1/4 |

\* All IN ports are Rc 3/8.

**Thread type**

|     |      |
|-----|------|
| Nil | Rc   |
| T   | NPTF |
| F   | G    |
| N   | NPT  |

**Number of manifolds**

|     |             |
|-----|-------------|
| 02  | 2 stations  |
| ... | ...         |
| 10  | 10 stations |

**Suffix**

|     |                |
|-----|----------------|
| Nil | —              |
| Z   | Oil-free spec. |

**Base, Seal material** • Refer to the table (2)-(2).

**Blanking plate part no.**

For VX21: VVX21-3A-P  
For VX22: VVX22-3A-P  
For VX23: VVX23-3A-P

**Seal material: PTFE**


## How to Order Manifold Assemblies (Example)

Enter the valve and blanking plate to be mounted under the manifold base part number.

Example

VVX211CP-05-1..... 1 set    “\*” is the symbol for mounting.  
\* VVX211S-1G1..... 4 sets    Add an “\*” in front of the part numbers for solenoid valves, etc. to be mounted.  
\* VVX21-3A-P..... 1 set

① — ② — ③ — ④ — ⑤ — ⑥

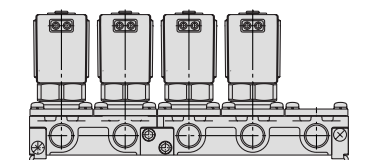

Enter the product's part number in order, counting the 1st station from the left in the manifold arrangement, when viewing the individual port in front.

Table (1) Model/Orifice Diameter

| Solenoid valve | Orifice symbol (Diameter) |              |                |              |
|----------------|---------------------------|--------------|----------------|--------------|
|                | 1<br>(2 mmø)              | 2<br>(3 mmø) | 3<br>(4.5 mmø) | 4<br>(6 mmø) |
| VX21           | ●                         | ●            | ●              | —            |
| VX22           | —                         | ●            | ●              | ●            |
| VX23           | —                         | —            | ●              | ●            |

Table (2) Solenoid Valve Option

| Solenoid valve option symbol (1) | Base, Seal material symbol (2) | Body, Base/Shading coil material | Seal material | Coil insulation type |
|----------------------------------|--------------------------------|----------------------------------|---------------|----------------------|
| S                                | CP                             | Brass (C37)/Cu                   | PTFE          | H                    |
| Q                                | SP                             | Stainless steel/Ag               |               |                      |

\* us : Coil insulation type Class H is not available.

Table (3) Rated Voltage – Electrical Option

| Rated voltage |   | Class H |                            |   |
|---------------|---|---------|----------------------------|---|
|               |   | S       | L                          | Z |
| AC            | 1 | 100 V   | ●                          | ● |
|               | 2 | 200 V   | ●                          | ● |
|               | 3 | 110 V   | ●                          | ● |
|               | 4 | 220 V   | ●                          | ● |
|               | 7 | 240 V   | ●                          | — |
|               | 8 | 48 V    | ●                          | — |
|               | J | 230 V   | ●                          | — |
| DC            | 5 | 24 V    | DC spec. is not available. |   |
|               | 6 | 12 V    |                            |   |

Dimensions → page 55 (Manifold)


# Series VX21/22/23

For Air, Water, Oil, Steam

## Construction: Single Unit

Normally closed (N.C.)

Body material: Brass (C37), Stainless steel

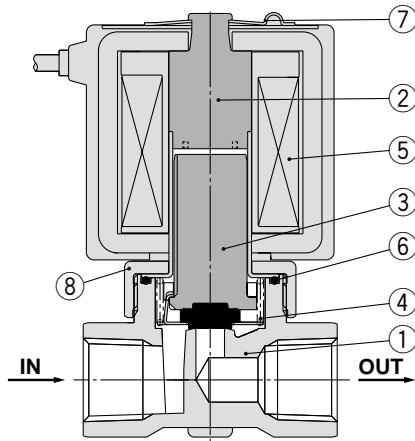

### Component Parts


| No. | Description                    | Material                                |   |
|-----|--------------------------------|---|---|
|     |                                | Body material Brass (C37) specification | Body material stainless steel specification |
| 1   | Body                           | Brass (C37)                             | Stainless steel                             |
| 2   | Tube assembly <sup>Note)</sup> | Stainless steel, Cu                     | Stainless steel, Ag                         |
| 3   | Armature assembly              | (NBR, FKM, EPDM, PTFE)                  | Stainless steel, PPS                        |
| 4   | Return spring                  | Stainless steel                         |   |
| 5   | Solenoid coil                  | —                                       |   |
| 6   | O-ring                         | (NBR, FKM, EPDM, PTFE)                  |   |
| 7   | Clip                           | SK                                      |   |
| 8   | Nut                            | Brass (C37)                             | Brass (C37), Ni plated                      |

The materials in parentheses are the seal materials.

Note) Cu and Ag are inapplicable to the DC spec and to the AC spec with built-in full-wave rectifier.

Normally open (N.O.)

Body material: Brass (C37), Stainless steel

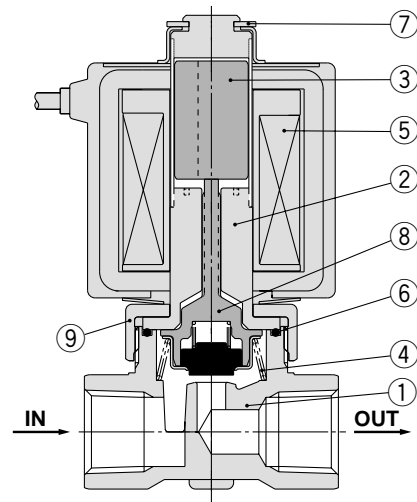

### Component Parts

| No. | Description                    | Material                                |   |
|-----|--------------------------------|---|---|
|     |                                | Body material Brass (C37) specification | Body material stainless steel specification |
| 1   | Body                           | Brass (C37)                             | Stainless steel                             |
| 2   | Tube assembly <sup>Note)</sup> | Stainless steel, Cu                     | Stainless steel, Ag                         |
| 3   | Armature assembly              | Stainless steel                         |   |
| 4   | Return spring                  | Stainless steel                         |   |
| 5   | Solenoid coil                  | —                                       |   |
| 6   | O-ring                         | (NBR, FKM, EPDM, PTFE)                  |   |
| 7   | Clip                           | SK                                      |   |
| 8   | Push rod assembly              | (NBR, FKM, EPDM, PTFE)                  | Stainless steel, PPS                        |
| 9   | Nut                            | Brass (C37)                             | Brass (C37), Ni plated                      |

The materials in parentheses are the seal materials.

Note) Cu and Ag are inapplicable to the DC spec and to the AC spec with built-in full-wave rectifier.

## Construction: Manifold


Normally closed (N.C.)

Base material: Aluminum

Fluid: Air

Common SUP type


Individual SUP type

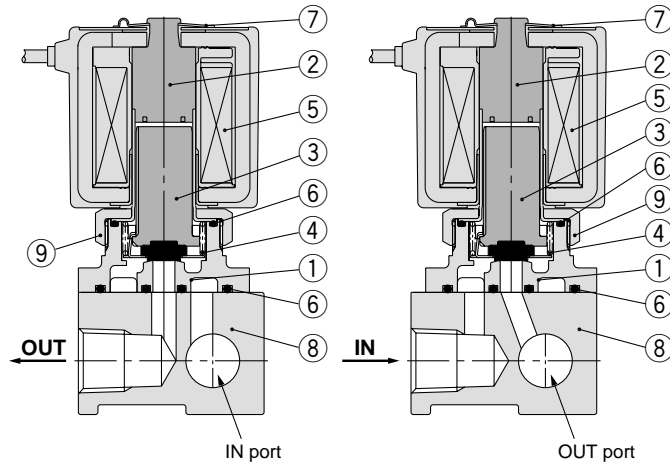

Base material: Brass (C37), Stainless steel

Fluid: Water, Oil, Steam

Common SUP type

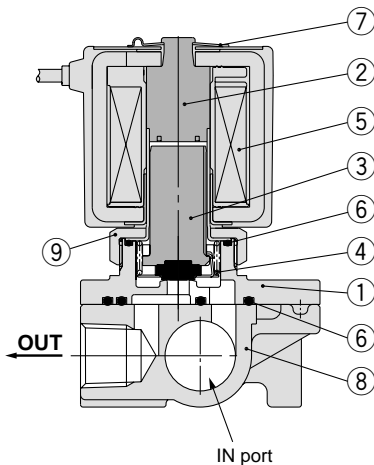

### Component Parts

| No. | Description                    | Material                                    |   |   |
|-----|--------------------------------|---|---|---|
|     |                                | Base material aluminum specification        | Base material Brass (C37) specification | Base material stainless steel specification |
| 1   | Body                           | Aluminum                                    | Brass (C37)                             | Stainless steel                             |
| 2   | Tube assembly <sup>Note)</sup> | Stainless steel, Cu                         |   | Stainless steel, Ag                         |
| 3   | Armature assembly              | (NBR, FKM, EPDM, PTFE) Stainless steel, PPS |   |   |
| 4   | Return spring                  | Stainless steel                             |   |   |
| 5   | Solenoid coil                  | —   |   |   |
| 6   | O-ring                         | (NBR, FKM, EPDM, PTFE)                      |   |   |
| 7   | Clip                           | SK  |   |   |
| 8   | Base                           | Aluminum                                    | Brass (C37)                             | Stainless steel                             |
| 9   | Nut                            | Brass (C37) (Ni plated)                     | Brass (C37)                             | Brass (C37), Ni plated                      |

The materials in parentheses are the seal materials.

Note) Cu and Ag are inapplicable to the DC spec and to the AC spec with built-in full-wave rectifier.


Normally open (N.O.)

Base material: Aluminum

Fluid: Air

Common SUP type


Individual SUP type

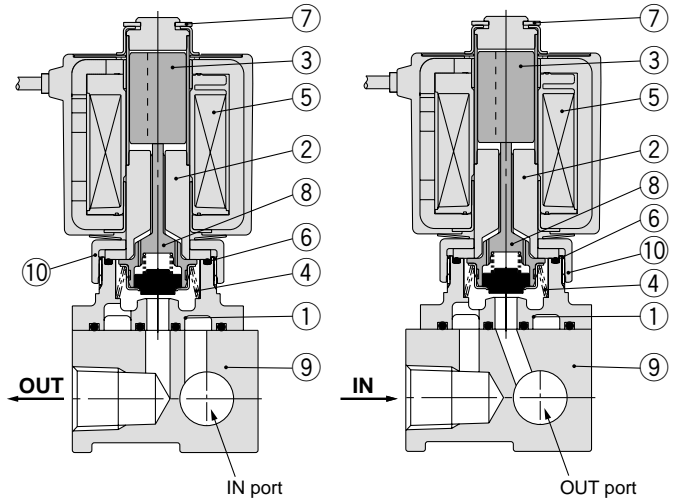

Base material: Brass (C37), Stainless steel

Fluid: Water, Oil, Steam

Common SUP type

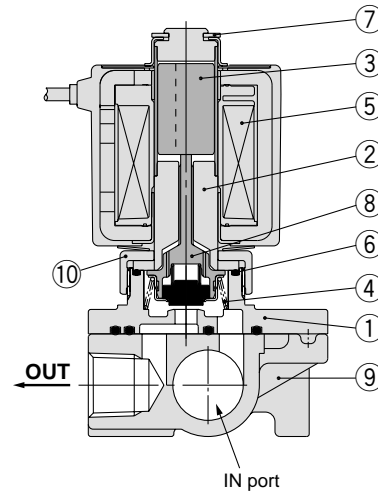

### Component Parts

| No. | Description                    | Material                                    |   |   |
|-----|--------------------------------|---|---|---|
|     |                                | Base material aluminum specification        | Base material Brass (C37) specification | Base material stainless steel specification |
| 1   | Body                           | Aluminum                                    | Brass (C37)                             | Stainless steel                             |
| 2   | Tube assembly <sup>Note)</sup> | Stainless steel, Cu                         |   | Stainless steel, Ag                         |
| 3   | Armature assembly              | Stainless steel                             |   |   |
| 4   | Return spring                  | Stainless steel                             |   |   |
| 5   | Solenoid coil                  | —   |   |   |
| 6   | O-ring                         | (NBR, FKM, EPDM, PTFE)                      |   |   |
| 7   | Clip                           | SK  |   |   |
| 8   | Push rod assembly              | (NBR, FKM, EPDM, PTFE) Stainless steel, PPS |   |   |
| 9   | Base                           | Aluminum                                    | Brass (C37)                             | Stainless steel                             |
| 10  | Nut                            | Brass (C37) (Ni plated)                     | Brass (C37)                             | Brass (C37), Ni plated                      |

The materials in parentheses are the seal materials.

Note) Cu and Ag are inapplicable to the DC spec and to the AC spec with built-in full-wave rectifier.

VX2

VXD

VXZ

VXE

VXP

VXR

VXH

VXF

VX3

VXA

VCH□

VDW

VQ

LVM

VCA

VCB

VCL

VCS

VCW

# Series VX21/22/23


For Air, Water, Oil, Steam

## Dimensions: Single Unit/Body Material: Brass (C37), Stainless Steel


Normally closed (N.C.): VX21□0/VX22□0/VX23□0

Normally open (N.O.): VX21□2/VX22□2/VX23□2


Grommet: G

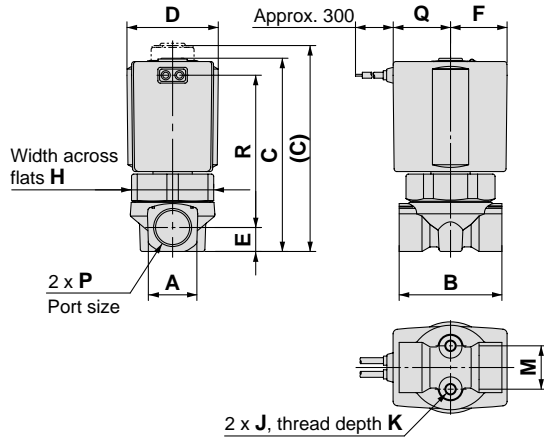


Conduit: C

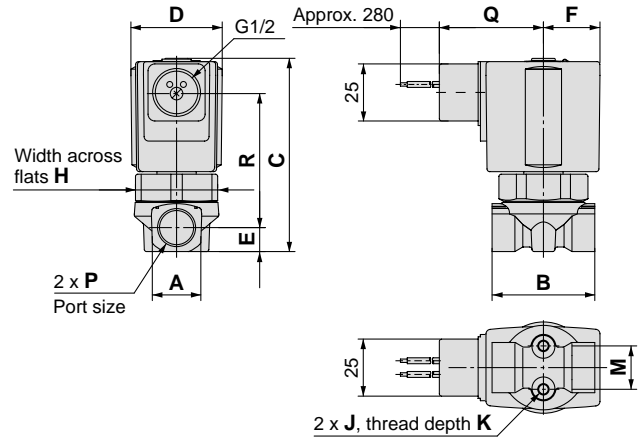

DIN terminal: D

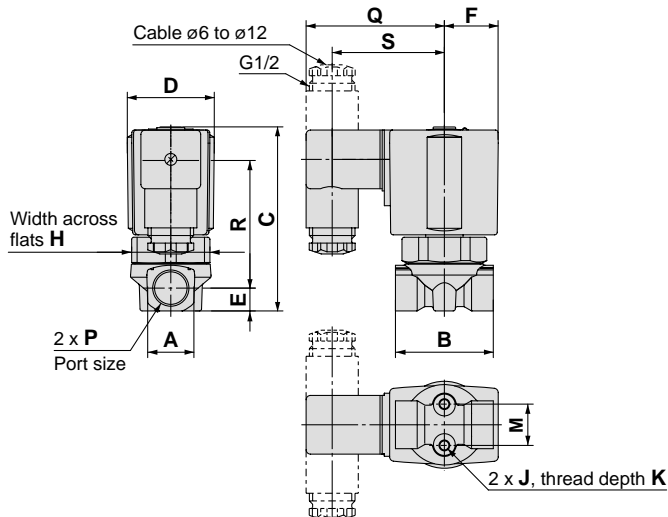

Conduit terminal: T

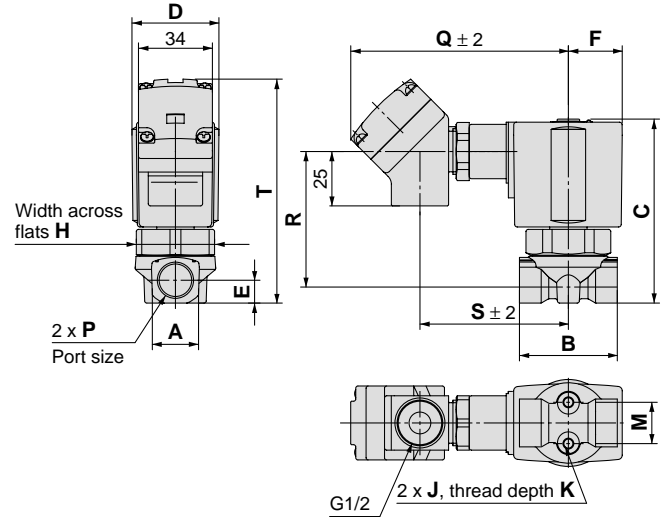

| Model  |        | Orifice diameter | Port size P   | A  | B  | C         | D  | E    | F    | H  | Bracket mounting |   |      |
|--------|--------|------------------|---------------|----|----|-----------|----|------|------|----|------------------|---|------|
| N.C.   | N.O.   |                  |               |    |    | Note 1)   |    |      |      |    | J                | K | M    |
| VX21□0 | VX21□2 | ø2, ø3, ø4.5     | 1/8, 1/4      | 18 | 40 | 68 (76)   | 30 | 9    | 19.5 | 27 | M4               | 6 | 12.8 |
| VX22□0 | VX22□2 | ø3, ø4.5, ø6     | 1/4, 3/8      | 22 | 45 | 78 (86)   | 35 | 10.5 | 22.5 | 32 | M5               | 8 | 19   |
| VX22□0 | —      | ø8, ø10          | 1/4, 3/8, 1/2 | 30 | 50 | 85        | —  | 14   | —    | —  | M5               | 8 | 23   |
| VX23□0 | VX23□2 | ø3, ø4.5, ø6     | 1/4, 3/8      | 22 | 45 | 85.5 (93) | 40 | 10.5 | 25   | 36 | M5               | 8 | 19   |
| VX23□0 | —      | ø8, ø10          | 1/4, 3/8, 1/2 | 30 | 50 | 92        | —  | 14   | —    | —  | M5               | 8 | 23   |

| (mm)   |        |                  |                |                                     |    |         |      |              |    |      |                  |      |      |   |    |         |      |              |      |    |                  |       |    |      |      |
|--------|--------|------------------|----------------|-------------------------------------|----|---------|------|--------------|----|------|------------------|------|------|---|----|---------|------|--------------|------|----|------------------|-------|----|------|------|
| Model  |        | Orifice diameter | Port size<br>P | Electrical entry <sup>Note 2)</sup> |    |         |      |              |    |      |                  |      |      | Electrical entry (Built-in full-wave rectifier type) <sup>Note 2)</sup> |    |         |      |              |      |    |                  |       |    |      |      |
|        |        |                  |                | Grommet                             |    | Conduit |      | DIN terminal |    |      | Conduit terminal |      |      | Grommet   |    | Conduit |      | DIN terminal |      |    | Conduit terminal |       |    |      |      |
| N.C.   | N.O.   |                  |                | Q                                   | R  | Q       | R    | Q            | R  | S    | Q                | R    | S    | T   | Q  | R       | Q    | R            | Q    | R  | S                | Q     | R  | S    | T    |
| VX21□0 | VX21□2 | ø2, ø3, ø4.5     | 1/8, 1/4       | 19.5                                | 50 | 40      | 42.5 | 58.5         | 42 | 46.5 | 92               | 42.5 | 61   | 83.5  | 30 | 46      | 48.5 | 41           | 65.5 | 42 | 53.5             | 100.5 | 41 | 69.5 | 82   |
| VX22□0 | VX22□2 | ø3, ø4.5, ø6     | 1/4, 3/8       | 22.5                                | 60 | 43      | 52.5 | 61.5         | 52 | 49.5 | 95               | 52.5 | 64   | 95  | 33 | 56      | 51.5 | 51           | 68.5 | 52 | 56.5             | 103.5 | 51 | 72.5 | 93.5 |
| VX22□0 | —      | ø8, ø10          | 1/4, 3/8, 1/2  |                                     | 63 |         | 55.5 |              | 55 |      |                  | 55.5 |      | 101.5   | 33 | 59      | 51.5 | 54           | 68.5 | 55 | 56.5             | 103.5 | 54 | 72.5 | 100  |
| VX23□0 | VX23□2 | ø3, ø4.5, ø6     | 1/4, 3/8       | 25.5                                | 66 | 46      | 58.5 | 64           | 58 | 52   | 98               | 58.5 | 66.5 | 101   | 36 | 62      | 54   | 57           | 71   | 58 | 59               | 106   | 57 | 75   | 99.5 |
| VX23□0 | —      | ø8, ø10          | 1/4, 3/8, 1/2  |                                     | 69 |         | 61.5 |              | 61 |      |                  | 61.5 |      | 107.5   | 36 | 65      | 54   | 60           | 71   | 61 | 59               | 106   | 60 | 75   | 106  |

Note 1) The figures in parentheses are the normally open (N.O.) type dimensions.

Note 2) Add 1.5 mm to "R" and "T" dimensions for the N.O. spec.



# Direct Operated 2 Port Solenoid Valve *Series VX21/22/23*

For Air, Water, Oil, Steam

## Dimensions: Single Unit/Body Material: Brass (C37), Stainless Steel

Normally closed (N.C.): VX21□0/VX22□0/VX23□0

Normally open (N.O.): VX21□2/VX22□2/VX23□2



Specifications with bracket

Orifice ø2, ø3, ø4.5, ø6

(Packed in the same container)

Orifice ø8, ø10

(Assembled at the time of shipment)

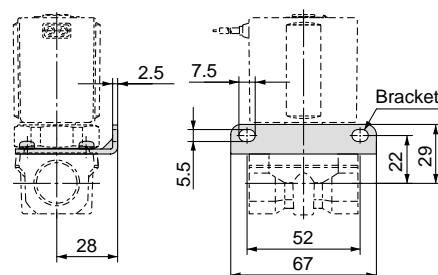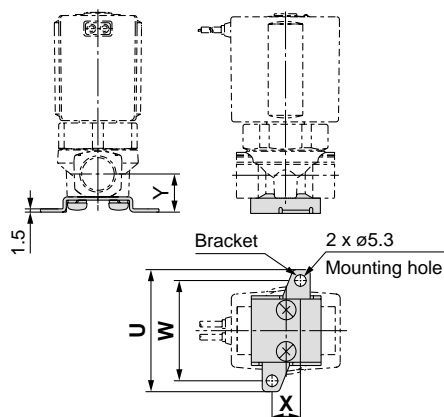

(mm)

| Model  |        | Orifice diameter | Port size P   | Bracket mounting |    |    |      |
|--------|--------|------------------|---------------|------------------|----|----|------|
| N.C.   | N.O.   |                  |               | U                | W  | X  | Y    |
| VX21□0 | VX21□2 | ø2, ø3, ø4.5     | 1/8, 1/4      | 46               | 36 | 11 | 15   |
| VX22□0 | VX22□2 | ø3, ø4.5, ø6     | 1/4, 3/8      | 56               | 46 | 13 | 17.5 |
| VX22□0 | —      | ø8, ø10          | 1/4, 3/8, 1/2 | —                | —  | —  | —    |
| VX23□0 | VX23□2 | ø3, ø4.5, ø6     | 1/4, 3/8      | 56               | 46 | 13 | 17.5 |
| VX23□0 | —      | ø8, ø10          | 1/4, 3/8, 1/2 | —                | —  | —  | —    |

VX2

VXD

VXZ

VXE

VXP

VXR

VXH

VXF

VX3

VXA

VCH□

VDW

VQ

LVM

VCA

VCB

VCL

VCS



VCW

# Series VVX21/22/23

For Air

## Dimensions: Manifold/Base Material: Aluminum

Normally closed (N.C.): VVX21/VVX22/VVX23  
Normally open (N.O.):

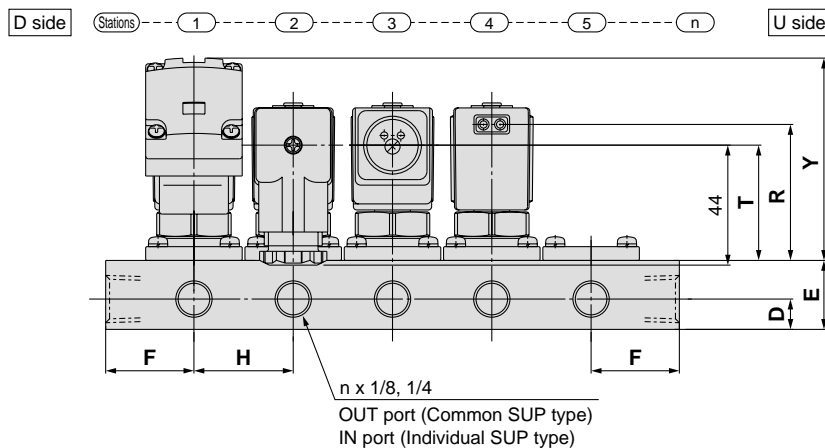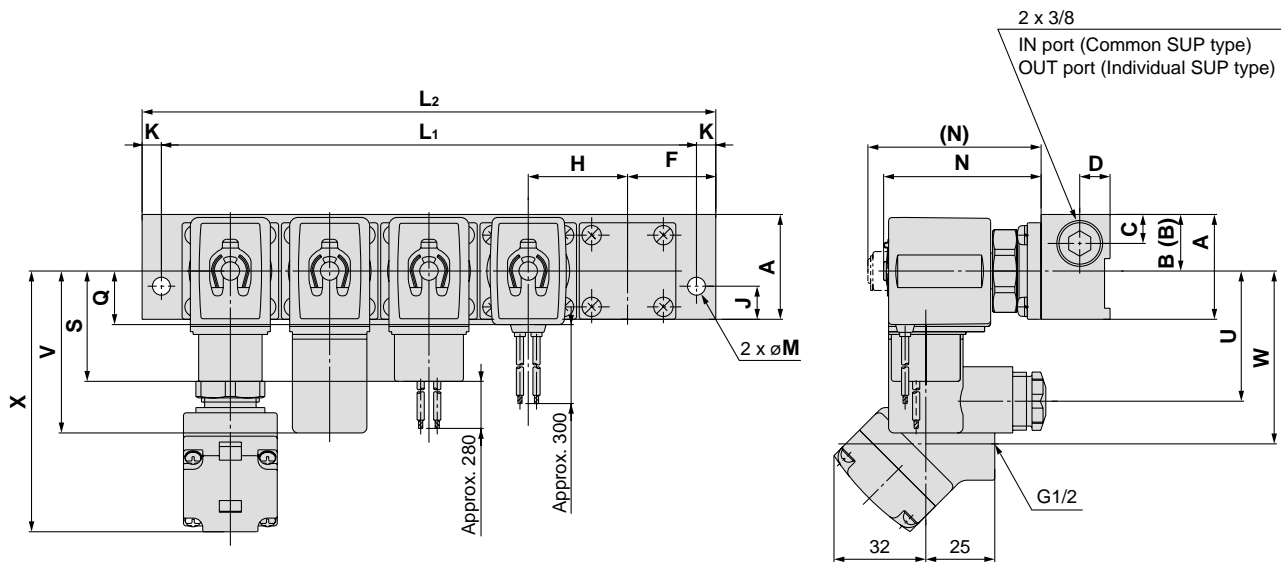

(mm)

| Model | Dimension      | n (Stations) |     |     |     |     |     |     |     |     |
|-------|----------------|--------------|-----|-----|-----|-----|-----|-----|-----|-----|
|       |                | 2            | 3   | 4   | 5   | 6   | 7   | 8   | 9   | 10  |
| VVX21 | L <sub>1</sub> | 86           | 122 | 158 | 194 | 230 | 266 | 302 | 338 | 374 |
|       | L <sub>2</sub> | 100          | 136 | 172 | 208 | 244 | 280 | 316 | 352 | 388 |
| VVX22 | L <sub>1</sub> | 108          | 154 | 200 | 246 | 292 | 338 | 384 | 430 | 476 |
| VVX23 | L <sub>2</sub> | 126          | 172 | 218 | 264 | 310 | 356 | 402 | 448 | 494 |

(mm)

| Model | A  | B    | (B)<br>Individual<br>SUP<br>type | C    | D  | E  | F  | H  | J  | K | M   | N           |
|-------|----|------|----------------------------------|------|----|----|----|----|----|---|-----|-------------|
| VVX21 | 38 | 20.5 | 17.5                             | 10.5 | 11 | 25 | 32 | 36 | 12 | 7 | 6.5 | 57.5 (65.5) |
| VVX22 | 49 | 26.5 | 22.5                             | 13   | 13 | 30 | 40 | 46 | 15 | 9 | 8.5 | 66.5 (74.5) |
| VVX23 | 49 | 26.5 | 22.5                             | 13   | 13 | 30 | 40 | 46 | 15 | 9 | 8.5 | 71.5 (80)   |

(mm)

| Model | Electrical entry |      |         |      |              |      |      |                  |    |      | Electrical entry (Built-in full-wave rectifier type) <sup>Note 2)</sup> |      |         |    |              |      |    |                  |       |    |
|-------|------------------|------|---------|------|--------------|------|------|------------------|----|------|---|------|---------|----|--------------|------|----|------------------|-------|----|
|       | Grommet          |      | Conduit |      | DIN terminal |      |      | Conduit terminal |    |      | Grommet   |      | Conduit |    | DIN terminal |      |    | Conduit terminal |       |    |
|       | Q                | R    | S       | T    | U            | V    | T    | W                | X  | Y    | Q   | R    | S       | T  | U            | V    | T  | W                | X     | Y  |
| VVX21 | 19.5             | 48.5 | 40      | 41   | 46.5         | 58.5 | 40.5 | 61               | 92 | 73   | 30  | 44.5 | 48.5    | 40 | 53.5         | 65.5 | 41 | 69.5             | 100.5 | 72 |
| VVX22 | 22.5             | 58.5 | 43      | 51   | 49.5         | 61.5 | 50.5 | 64               | 95 | 83   | 33  | 54.5 | 51.5    | 50 | 56.5         | 68.5 | 51 | 72.5             | 103.5 | 82 |
| VVX23 | 25.5             | 63   | 46      | 55.5 | 52           | 64   | 55   | 66.5             | 98 | 87.5 | 36  | 59   | 54      | 54 | 59           | 71   | 55 | 75               | 106   | 86 |

Note 1) The figures in parentheses are the normally open (N.O.) type dimensions.


Note 2) Add 1.5 mm to "R", "T" and "Y" dimensions for the N.O. spec.

# Direct Operated 2 Port Solenoid Valve **Series VVX21/22/23**

For Water, Oil, Steam

## Dimensions: Manifold/Base Material: Brass (C37), Stainless Steel

Normally closed (N.C.): VVX21/VVX22/VVX23  
 Normally open (N.O.)

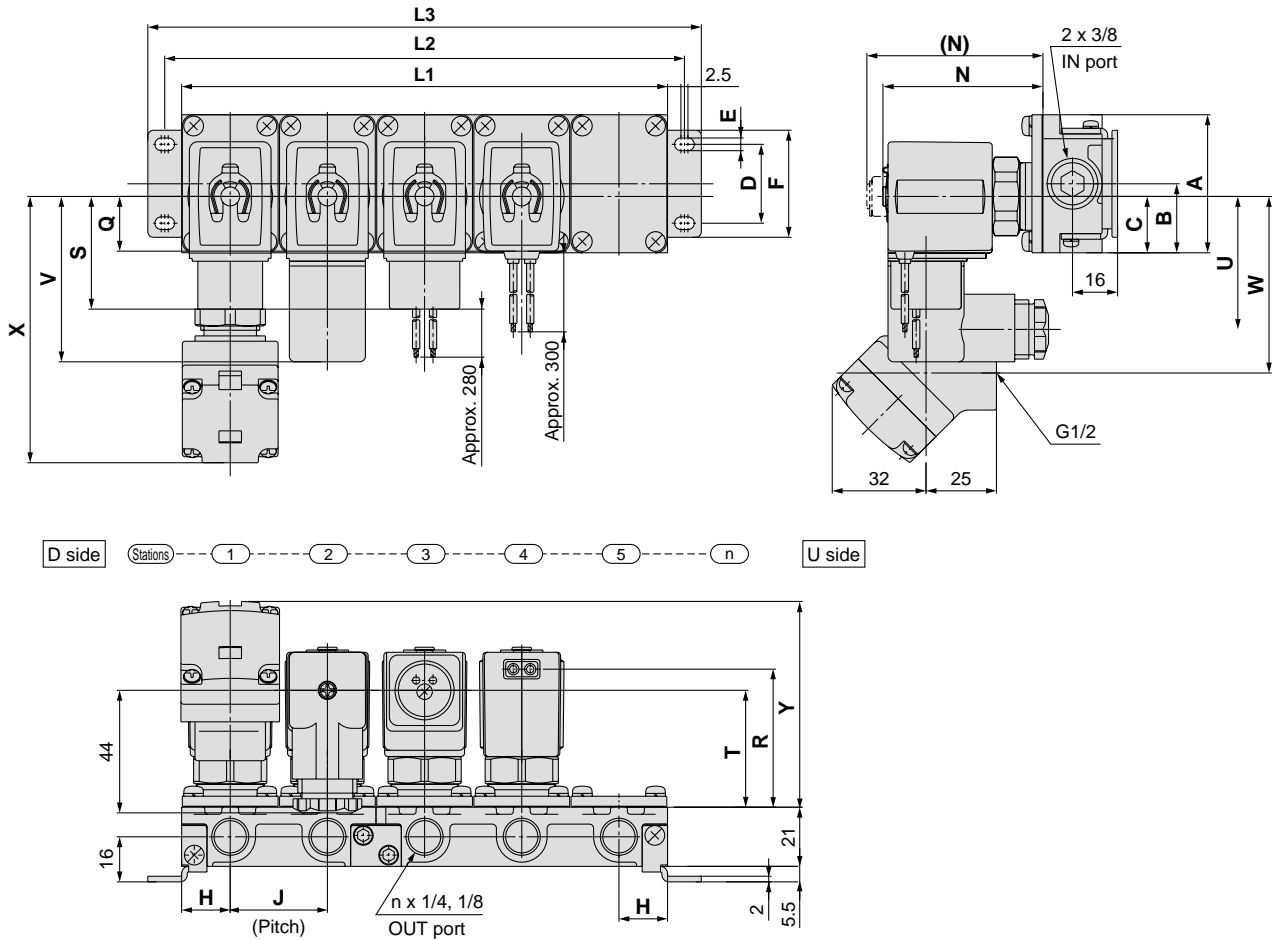

| Model                | Dimension      | n (Stations) |             |             |                   |             |                       |                       |             |                           |
|----------------------|----------------|--------------|-------------|-------------|-------------------|-------------|-----------------------|-----------------------|-------------|---------------------------|
|                      |                | 2            | 3           | 4           | 5                 | 6           | 7                     | 8                     | 9           | 10                        |
| VVX21                | L <sub>1</sub> | 70           | 105         | 140         | 175               | 210         | 245                   | 280                   | 315         | 350                       |
|                      | L <sub>2</sub> | 82           | 117         | 152         | 187               | 222         | 257                   | 292                   | 327         | 362                       |
|                      | L <sub>3</sub> | 94           | 129         | 164         | 199               | 234         | 269                   | 304                   | 339         | 374                       |
| VVX22                | L <sub>1</sub> | 78           | 117         | 156         | 195               | 234         | 273                   | 312                   | 351         | 390                       |
|                      | L <sub>2</sub> | 90           | 129         | 168         | 207               | 246         | 285                   | 324                   | 363         | 402                       |
|                      | L <sub>3</sub> | 102          | 141         | 180         | 219               | 258         | 297                   | 336                   | 375         | 414                       |
| VVX23                | L <sub>1</sub> | 84           | 126         | 168         | 210               | 252         | 294                   | 336                   | 378         | 420                       |
|                      | L <sub>2</sub> | 96           | 138         | 180         | 222               | 264         | 306                   | 348                   | 390         | 432                       |
|                      | L <sub>3</sub> | 108          | 150         | 192         | 234               | 276         | 318                   | 360                   | 402         | 444                       |
| Manifold composition |                | 2 stns. x 1  | 3 stns. x 1 | 2 stns. x 2 | 2 stns. + 3 stns. | 3 stns. x 2 | 2 stns. x 2 + 3 stns. | 2 stns. + 3 stns. x 2 | 3 stns. x 3 | 2 stns. x 2 + 3 stns. x 2 |

| Model | A  | B    | C    | D  | E   | F  | H    | J    | N           |
|-------|----|------|------|----|-----|----|------|------|-------------|
| VVX21 | 49 | 24.5 | 20   | 28 | 4.5 | 38 | 17.3 | 34.5 | 56 (64)     |
| VVX22 | 57 | 28.5 | 25.5 | 30 | 5.5 | 42 | 19.3 | 38.5 | 64.5 (72.5) |
| VVX23 | 57 | 28.5 | 25.5 | 30 | 5.5 | 42 | 20.8 | 41.5 | 72.5 (81)   |

| (mm)  |                                     |      |         |      |              |      |      |                  |    |      |   |      |         |      |              |      |      |                  |       |    |
|-------|-------------------------------------|------|---------|------|--------------|------|------|------------------|----|------|---|------|---------|------|--------------|------|------|------------------|-------|----|
| Model | Electrical entry <sup>Note 2)</sup> |      |         |      |              |      |      |                  |    |      | Electrical entry (Built-in full-wave rectifier type) <sup>Note 2)</sup> |      |         |      |              |      |      |                  |       |    |
|       | Grommet                             |      | Conduit |      | DIN terminal |      |      | Conduit terminal |    |      | Grommet   |      | Conduit |      | DIN terminal |      |      | Conduit terminal |       |    |
|       | Q                                   | R    | S       | T    | U            | V    | T    | W                | X  | Y    | Q   | R    | S       | T    | U            | V    | T    | W                | X     | Y  |
| VVX21 | 19.5                                | 47   | 40      | 39.5 | 46.5         | 58.5 | 39   | 61               | 92 | 71.5 | 30  | 43   | 48.5    | 38   | 53.5         | 65.5 | 39   | 69.5             | 100.5 | 70 |
| VVX22 | 22.5                                | 56.5 | 43      | 49   | 49.5         | 61.5 | 48.5 | 64               | 95 | 81   | 33  | 52.5 | 51.5    | 47.5 | 56.5         | 68.5 | 48.5 | 72.5             | 103.5 | 80 |
| VVX23 | 25.5                                | 64   | 46      | 56.5 | 52           | 64   | 56   | 66.5             | 98 | 88.5 | 36  | 60   | 54      | 55   | 59           | 71   | 56   | 75               | 106   | 87 |

Note 1) The figures in parentheses are the normally open (N.O.) type dimensions.

Note 2) Add 1.5 mm to "R", "T" and "Y" dimensions for the N.O. spec.

VX2

VXD

VXZ

VXE

VXP

VXR

VXH

VXF

VX3

VXA

VCH

VDW

VQ

LVM

VCA

VCB

VCL

VCS

VCW

# Series VX21/22/23

For Air, Water, Oil, Steam

## Replacement Parts

### • Solenoid coil assembly part no.

VX02 1 N - 1 G - -

Series

|   |        |
|---|--------|
| 1 | VX21□□ |
| 2 | VX22□□ |
| 3 | VX23□□ |

Valve

| Symbol | Valve |
|--------|-------|
| Nil    | N.C.  |
| 2      | N.O.  |

Rated voltage (Note)

|   |                  |
|---|------------------|
| 1 | 100 VAC 50/60 Hz |
| 2 | 200 VAC 50/60 Hz |
| 3 | 110 VAC 50/60 Hz |
| 4 | 220 VAC 50/60 Hz |
| 5 | 24 VDC           |
| 6 | 12 VDC           |
| 7 | 240 VAC 50/60 Hz |
| 8 | 48 VAC 50/60 Hz  |
| J | 230 VAC 50/60 Hz |





(Note) Refer to the table (1) for the available combinations.

Coil insulation type (Note)

|     |         |
|-----|---------|
| Nil | Class B |
| H*  | Class H |

\* DIN terminal and DC spec are not available.

Electrical entry


|  |   |   |  |
|--|---|---|--|
| <b>G</b> -Grommet<br><b>GS</b> -With grommet surge voltage suppressor  |    | <b>C</b> -Conduit   |                     |
| <b>T</b> -With conduit terminal<br><b>TS</b> -With conduit terminal and surge voltage suppressor<br><b>TL</b> -With conduit terminal and light<br><b>TZ</b> -With conduit terminal, surge voltage suppressor and light |  | <b>D</b> -DIN terminal<br><b>DS</b> -DIN terminal with surge voltage suppressor<br><b>DL</b> -DIN terminal with light<br><b>DZ</b> -DIN terminal with surge voltage suppressor and light<br><b>DO</b> -For DIN terminal (without connector) |  <p>Connector</p> |

\* Refer to the table (1) for the available combinations between each electrical option (S, L, Z) and rated voltage.

### • DIN connector part no.

Without electrical option **GDM2A**

With electrical option **GDM2A -**



Electrical option

|          |                                     |
|----------|-------------------------------------|
| <b>S</b> | With surge voltage suppressor       |
| <b>L</b> | With light                          |
| <b>Z</b> | With light/surge voltage suppressor |

\* Refer to the table (1) for the available combinations between each electrical option (S, L, Z) and rated voltage.

Rated voltage

|    |                                    |
|----|------------------------------------|
| 1  | 100 VAC, 110 VAC                   |
| 2  | 200 VAC, 220 VAC, 230 VAC, 240 VAC |
| 5  | 24 VDC                             |
| 6  | 12 VDC                             |
| 15 | 48 VAC                             |

### • Gasket part no. for DIN connector

**VCW20-1-29-1**

### AC/Class B coil (Built-in full-wave rectifier)

VX02 1 N - 1 GR -

Series

|   |        |
|---|--------|
| 1 | VX21□□ |
| 2 | VX22□□ |
| 3 | VX23□□ |

Valve





| Symbol | Valve |
|--------|-------|
| Nil    | N.C.  |
| 2      | N.O.  |

Rated voltage (Note)

|   |                  |
|---|------------------|
| 1 | 100 VAC 50/60 Hz |
| 2 | 200 VAC 50/60 Hz |
| 3 | 110 VAC 50/60 Hz |
| 4 | 220 VAC 50/60 Hz |
| 7 | 240 VAC 50/60 Hz |
| 8 | 48 VAC 50/60 Hz  |
| J | 230 VAC 50/60 Hz |

(Note) Refer to the table (1) for the available combinations.

Electrical entry

|   |   |  |   |
|---|---|--|---|
| <b>G</b> -Grommet   |  | <b>C</b> -Conduit  |                    |
| <b>T</b> -With conduit terminal<br><b>TL</b> -With conduit terminal and light |  | <b>D</b> -DIN terminal<br><b>DL</b> -DIN terminal with light<br><b>DO</b> -For DIN terminal (without connector, gasket is included.) |  <p>Connector</p> |

\* Refer to the table (1) for the available combinations between each electrical option and rated voltage.

\* Surge voltage suppressor is integrated into the AC/Class B coil, as a standard.

Table (1) Rated Voltage – Electrical Option

| Rated voltage |                |         | Class B                            |                 |  | Class H                            |                 |  |
|---------------|----------------|---------|------------------------------------|-----------------|--|------------------------------------|-----------------|--|
| AC/DC         | Voltage symbol | Voltage | S<br>With surge voltage suppressor | L<br>With light | Z<br>With light/surge voltage suppressor | S<br>With surge voltage suppressor | L<br>With light | Z<br>With light/surge voltage suppressor |
| AC            | 1              | 100 V   | ●                                  | ●               | ●  | ●                                  | ●               | ●  |
|               | 2              | 200 V   | ●                                  | ●               | ●  | ●                                  | ●               | ●  |
|               | 3              | 110 V   | ●                                  | ●               | ●  | ●                                  | ●               | ●  |
|               | 4              | 220 V   | ●                                  | ●               | ●  | ●                                  | ●               | ●  |
|               | 7              | 240 V   | ●                                  | —               | —  | ●                                  | —               | —  |
|               | 8              | 48 V    | ●                                  | —               | —  | ●                                  | —               | —  |
|               | J              | 230 V   | ●                                  | —               | —  | ●                                  | —               | —  |
| DC            | 5              | 24 V    | ●                                  | ●               | ●  | DC spec. is not available.         |                 |  |
|               | 6              | 12 V    | ●                                  | —               | —  |                                    |                 |  |

\* Option "S", "Z" are not available as surge voltage suppressor is integrated into the AC/Class B, as a standard.

\* Replacement of solenoid coils:

- DC and AC coils cannot be interchanged in order to change the voltage.
- DC and AC (built-in full-wave rectifier type) coils can be interchanged in order to change the voltage.
- All DC coil voltages are interchangeable.
- All AC coil voltages are interchangeable.

● Name plate part no.

**AZ-T-VX** Valve model

↑ Enter by referring to  
 "How to Order"  
 (Single Unit).

● Clip part no. (For N.C.)

For VX21: **VX021N-10**

For VX22: **VX022N-10**


For VX23: **VX023N-10**

● Clip part no. (For N.O.)

For VX21: **ETW-7**

For VX22: **ETW-8**

For VX23: **ETW-9**

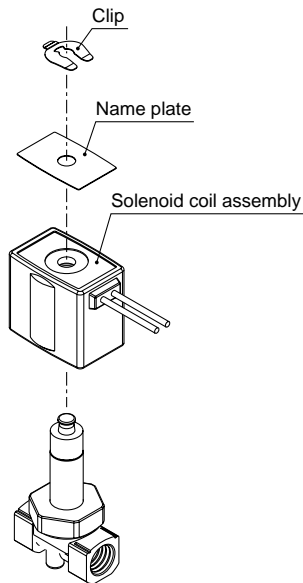

**VX2**

**VXD**

**VXZ**

**VXE**

**VXP**

**VXR**

**VXH**

**VXF**

**VX3**

**VXA**

**VCH□**

**VDW**

**VQ**

**LVM**

**VCA**

**VCB**

**VCL**

**VCS**

**VCW**