

Energy Saving Type 2 Port Solenoid Valve

Series **VXE**

For Air, Water, Oil



**Power
consumption**

(SMC comparison)

1/3



New generation valve corresponding to energy-saving needs

●IP65 ●RoHS compliance

VX2

VXD

VXZ

VXE

VXP

VXR

VXH

VXF

VX3

VXA

VCH□

VDW

VQ

LVM

VCA

VCB

VCL

VCS

VCW

Series **VXE**

VXE2, VXED2, VXEZ2

2 port solenoid valve for various fluids

Energy saving type of the VX2, VXD2 and VXZ2 series


VXE2 Direct Operated

VXED2 Pilot Operated

VXEZ2 Zero Differential Pressure Type Pilot Operated

- The power consumption (when holding) is substantially reduced (approx. 1/3).
- Coil heat reduction

Model	Power consumption (W) (Holding)	Inrush current (A) (Inrush time: 200 ms)		Temperature increase (°C)
		24 VDC	12 VDC	
VXE□21 (VXED2130)	1.5 (1.8)	0.19 (0.23)	0.38 (0.46)	25 (30)
VXE□22	2.3	0.29	0.58	25
VXE□23	3	0.44	0.88	30

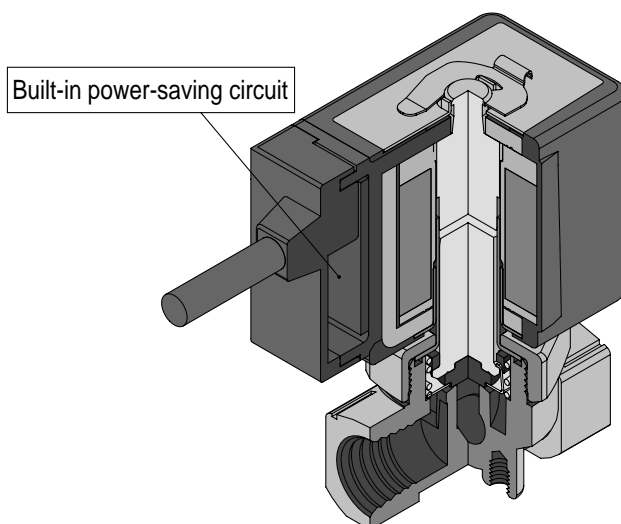



● Interchangeable

The mounting dimensions and its basic specifications are equivalent to those of conventional models.




● Replaceable coil

Possible to change the solenoid coil assembly for the VX2, VXD and VXZ with the power-saving coil type.

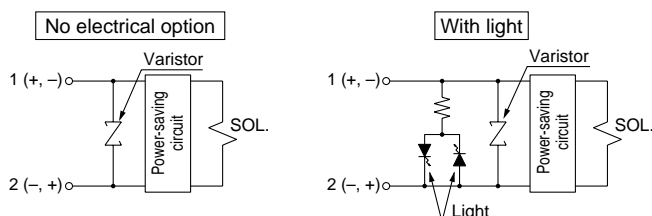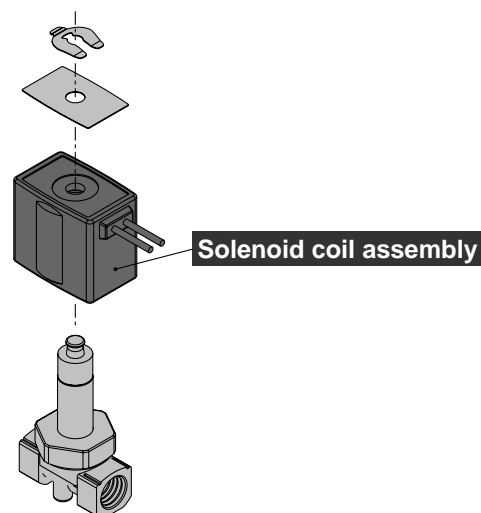(Restricted for the rated voltage 12, 24 VDC)



Body Size Variations between 1/8" to 2"

Series	Port size	Thread						Flange		
	Orifice diameter	1/8	1/4	3/8	1/2	3/4	1	32A	40A	50A
VXE2 Direct Operated 	2 mmø	●	●							
	3 mmø	●	●	●						
	4.5 mmø	●	●	●						
	6 mmø		●	●						
	8 mmø		●	●						
	10 mmø		●	●	●					
VXED2 Pilot Operated 	10 mmø		●	●	●					
	15 mmø			●	●					
	20 mmø					●				
	25 mmø						●			
	35 mmø							●		
	40 mmø								●	
	50 mmø									●
VXEZ2 Zero Differential Pressure Type Pilot Operated 	10 mmø		●	●						
	15 mmø				●					
	20 mmø					●				
	25 mmø						●			

P.97

P.119

P.133

VX2

VXD

VXZ

VXE

VXP

VXR

VXH

VXF

VX3

VXA

VCH□

VDW

VQ

LVM

VCA

VCB

VCL

VCS

VCW

Energy Saving Type

Direct Operated 2 Port Solenoid Valve

Series VXE21/22/23

For Air, Water, Oil



Single Unit

■ Valve

Normally closed (N.C.)

■ Solenoid Coil

Coil: Class B

■ Rated Voltage

24 VDC, 12 VDC

■ Material

Body — Brass (C37), Stainless steel
Seal — NBR, FKM, EPDM, PTFE


■ Electrical Entry

- Grommet
- Conduit
- DIN terminal
- Conduit terminal



Normally Closed (N.C.)

Model	VXE21	VXE22	VXE23
Orifice diameter	2 mmø	—	—
	3 mmø	●	—
	4.5 mmø	●	—
	6 mmø	—	●
	8 mmø	—	●
	10 mmø	—	●
Port size	1/8	1/4	1/2
	1/4	3/8	1/2



Manifold

■ Valve

Normally closed (N.C.)

■ Base

Common SUP
Individual SUP (Aluminum base only)

■ Solenoid Coil

Coil: Class B

■ Rated Voltage


24 VDC, 12 VDC

■ Material

Body — Aluminum, Brass (C37),
Stainless steel
Base — Aluminum, Brass (C37),
Stainless steel
Seal — NBR, FKM, EPDM, PTFE

■ Electrical Entry

- Grommet
- Conduit
- DIN terminal
- Conduit terminal

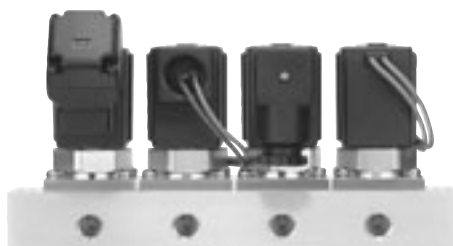

Manifold

Model	VXE21	VXE22	VXE23
Orifice diameter	2 mmø	—	—
	3 mmø	●	●
	4.5 mmø	●	●
	6 mmø	—	●
(Common SUP) Port size	3/8		
	1/8, 1/4		

VX2

VXD

VXZ

VXE

VXP

VXR

VXH

VXF

VX3

VXA

VCH□

VDW

VQ

LVM

VCA

VCB

VCL

VCS

VCW

Series VXE21/22/23

Common Specifications

Standard Specifications

Valve specifications	Valve construction	Direct operated poppet
	Valve type	N.C.
	Withstand pressure	5.0 MPa
	Body material	Brass (C37), Stainless steel
	Seal material	NBR, FKM, EPDM, PTFE
	Enclosure	Dusttight, Low jetproof (IP65)
	Environment	Location without corrosive or explosive gases
Coil specifications	Rated voltage	24 VDC, 12 VDC
	Allowable voltage fluctuation	±10% of rated voltage
	Allowable leakage voltage	2% or less of rated voltage
	Coil insulation type	Class B
	Surge voltage suppressor	Built-in surge voltage suppressor

Solenoid Coil Specifications

Normally Closed (N.C.)

DC Specification

Model	Power consumption (W) (Holding)	Inrush current (A) (Inrush time: 200 ms) ^{Note 1)}		Temperature increase (°C) ^{Note 2)}
		24 VDC	12 VDC	
VXE21	1.5	0.19	0.38	25
VXE22	2.3	0.29	0.58	25
VXE23	3	0.44	0.88	30

Note 1) Energizing time should be 200 ms or longer.


Note 2) Value for ambient temperature at 20°C and when the rated voltage is applied.

Contents

For Air /Single Unit	P.100
For Air /Manifold	P.102
For Water /Single Unit	P.104
For Water /Manifold	P.106
For Oil /Single Unit	P.108
For Oil /Manifold	P.110
Construction: Single Unit	P.112
Construction: Manifold	P.113
Dimensions: Single unit	P.114
Dimensions: Manifold	P.116
Replacement Parts	P.144

Applicable Fluid Check List

Energy Saving Type/Direct Operated 2 Port Solenoid Valve Series VXE21/22/23

All Options (Single Unit)  Refer to pages 100, 104, and 108 for specifications and models.

VXE2 0 - - 1 -

• Option symbol

Fluid and application	Option symbol	Seal material	Body material
Air	Nil	NBR	Brass (C37)
	G		Stainless steel
Medium vacuum/Non-leak/ Oil-free <small>Note 1)</small>	V <small>Note 2)</small>	FKM	Brass (C37)
	M <small>Note 2)</small>		Stainless steel
Water	Nil	NBR	Brass (C37)
	G		Stainless steel
Oil <small>Note 3)</small>	A	FKM	Brass (C37)
	H		Stainless steel
High corrosive/Oil-free	L <small>Note 2)</small>	FKM	Stainless steel
Copper-free/Fluorine-free <small>Note 4)</small>	J	EPDM	Stainless steel
Other combination	B	EPDM	Brass (C37)
	C	PTFE	Stainless steel
	K		



VX2

VXD

VXZ

VXE

VXP

VXR

VXH

VXF

VX3

VXA

VCH ☐

VDW

VQ

LVM


VCA

VCB

VCL

VCS

VCW

All Options (Manifold)  Refer to pages 102, 106, and 110 for specifications and models.

VXE2 1 - - 1

• Option symbol

• Base symbol

Fluid and application	Option symbol	Base symbol	Seal material	Body material
Air	Nil	00	NBR	Aluminum
Medium vacuum/Non-leak/Oil-free <small>Note 1)</small>	V <small>Note 2)</small>	00	FKM	Aluminum
Water	Nil	Nil	NBR	Brass (C37)
	G			Stainless steel
Oil <small>Note 3)</small>	A	Nil	FKM	Brass (C37)
	H			Stainless steel
High corrosive/Oil-free	L <small>Note 2)</small>	Nil	FKM	Stainless steel
Non-leak/Copper-free/Oil-free <small>Note 4)</small>	R	00	FKM	Aluminum


Note 1) The leakage amount (10^{-6} Pa·m³/s) of V and M options is value when differential pressure is 0.1 MPa.

Note 2) The V, M and L options are oil-free treatment.

Note 3) The dynamic viscosity of the fluid must not exceed 50 mm²/s or less.

Note 4) The nuts (non-wetted parts) are nickel plated on the C37 material.

* If using for other fluids, please consult with SMC.



Series VXE21/22/23


For Air /Single Unit

(Inert gas/Non-leak/Medium vacuum)

Model/Valve Specifications

N.C.

Passage symbol



Normally Closed (N.C.)

Port size	Orifice dia. (mmø)	Model	Max. operating pressure differential (MPa)	Flow characteristics			Max. system pressure (MPa)	Note) Mass (g)
				C[dm ³ /(s·bar)]	b	Cv		
1/8 (6A)	2	VXE2110-01	1.5	0.59	0.48	0.18	3.0	300
	3	VXE2120-01	0.6	1.2	0.45	0.33		
	4.5	VXE2130-01	0.2	2.3	0.46	0.61		
1/4 (8A)	2	VXE2110-02	1.5	0.59	0.48	0.18	3.0	300
		VXE2120-02	0.6					
	3	VXE2220-02	1.5	1.2	0.45	0.33		470
		VXE2320-02	3.0					620
		VXE2130-02	0.2					300
	4.5	VXE2230-02	0.35	2.3	0.46	0.61		470
		VXE2330-02	0.9				1.0	620
	6	VXE2240-02	0.15	4.1	0.30	1.10		470
		VXE2340-02	0.35					620
	8	VXE2250-02	0.08	6.4	0.30	1.60		560
		VXE2350-02	0.2					700
	10	VXE2260-02	0.03	8.8	0.30	2.00		560
		VXE2360-02	0.07					700
3/8 (10A)	3	VXE2220-03	1.5	1.2	0.45	0.33	3.0	470
		VXE2320-03	3.0					620
	4.5	VXE2230-03	0.35	2.3	0.46	0.61		470
		VXE2330-03	0.9					620
	6	VXE2240-03	0.15	4.1	0.30	1.10	1.0	470
		VXE2340-03	0.35					620
	8	VXE2250-03	0.08	6.4	0.30	1.60		560
		VXE2350-03	0.2					700
	10	VXE2260-03	0.03	11	0.30	2.20		560
		VXE2360-03	0.07					700
1/2 (15A)	10	VXE2260-04	0.03	11	0.30	2.20	1.0	560
		VXE2360-04	0.07					700

Note) Mass of grommet type. Add 10 g for conduit, 30 g for DIN terminal, and 60 g for conduit terminal type respectively.

- Refer to "Glossary of Terms" on page 26 for details on the max. operating pressure differential and the max. system pressure.

Fluid and Ambient Temperature

Fluid temperature (°C)		Ambient temperature (°C)
Solenoid valve option symbol		
Nil, G	V, M	
−10 ^{Note)} to 60	−10 ^{Note)} to 60	−20 to 60

Note) Dew point temperature: -10°C or less

Valve Leakage Rate

Internal Leakage

Seal material	Leakage	
	Air	Non-leak/ Medium vacuum Note)
NBR, FKM	1 cm ³ /min or less	10 ⁻⁶ Pa·m ³ /sec or less

External Leakage

Seal material	Leakage	
	Air	Non-leak/ Medium vacuum Note)
NBR, FKM	1 cm ³ /min or less	10 ⁻⁶ Pa·m ³ /sec or less

Note) Value for V and M options (Non-leak/Medium vacuum)

How to Order (Single Unit)

DC VXE 21 2 0 - 01 - 5 G 1 -

Model
Refer to Table (1) shown below for availability.

Orifice diameter
Refer to Table (1) shown below for availability.

Valve/Body configuration
0 N.C. / Single unit

Solenoid valve option
Refer to Table (2) shown below for availability.

Suffix

Nil	—
Z	Oil-free

 Select Nil because the solenoid valve V, M options are oil-free treatment.

Port size
Refer to Table (1) shown below for availability.

Bracket

Nil	None
B	With bracket

 * VX021N-12A and VX022N-12A are packed in the same container as the main body.
 * Refer to Table (4) if a bracket is ordered separately.

Rated voltage





5	24 VDC
6	12 VDC

 * Refer to Table (3) shown below for availability.
 Refer to page 144 for ordering coil only.

Thread type

Nil	Rc
T	NPTF
F	G
N	NPT

Electrical entry

G-Grommet 	C-Conduit 
T -With conduit terminal TL -With conduit terminal and light 	D -DIN terminal DL -DIN terminal with light DO -For DIN terminal (without connector, with gasket) 

 * Refer to Table (3) for available combinations between electrical option (L) and rated voltage.

Table (1) Model/Orifice Diameter/Port Size Normally Closed (N.C.)

Solenoid valve model (Port size)				Orifice symbol (Diameter)					
Model	VXE21	VXE22	VXE23	1 (2 mmø)	2 (3 mmø)	3 (4.5 mmø)	4 (6 mmø)	5 (8 mmø)	6 (10 mmø)
Port symbol (Port size)	01 (1/8)	—	—	●	●	●	—	—	—
	02 (1/4)	—	—	●	●	●	—	—	—
	—	02 (1/4)	02 (1/4)	—	●	●	●	●	●
	—	03 (3/8)	03 (3/8)	—	●	●	●	●	●
	—	04 (1/2)	04 (1/2)	—	—	—	—	—	●

Table (2) Solenoid Valve Option

Option symbol	Seal material	Body material	Note
Nil	NBR	Brass (C37)	—
G		Stainless steel	
V	FKM	Brass (C37)	Non-leak (10 ⁻⁶ Pa·m ³ /sec)/Oil-free/ Medium vacuum (0.1 Pa.abs)
M		Stainless steel	

Table (3) Rated Voltage – Electrical Option

Rated voltage		L (With light)
Voltage symbol	Voltage	
5	24 VDC	●
6	12 VDC	—

Table (4) Bracket Part No.

Model	Part no.
VXE21 ¹ ₂ 0 ³	VX021N-12A
VXE22 ² ₃ 0 ⁴	VX022N-12A
VXE23 ² ₃ 0 ⁴	
VXE22 ⁵ ₆ 0 ⁵	VX023N-12A-L
VXE23 ⁵ ₆ 0 ⁵	

VX2

VXD

VXZ

VXE

VXP

VXR

VXH

VXF

VX3

VXA

VCH

VDW

VQ

LVM

VCA

VCB

VCL

VCS

VCW

Series VXE21/22/23


For Air/Manifold

(Inert gas/Non-leak/Medium vacuum)



Solenoid Valve for Manifold/Valve Specifications

N.C.

Passage symbol



Common SUP



Individual SUP

Normally Closed (N.C.)

Orifice dia. (mmø)	Model	Max. operating pressure differential (MPa)	Flow characteristics			Max. system pressure (MPa)
			C[dm ³ /(s·bar)]	b	Cv	
2	VXE2111-00	1.5	0.59	0.48	0.18	3.0
3	VXE2121-00	0.6	1.2	0.45	0.33	
	VXE2221-00	1.5				
	VXE2321-00	3.0				
4.5	VXE2131-00	0.2	2.3	0.46	0.61	
	VXE2231-00	0.35				
	VXE2331-00	0.9				
6	VXE2241-00	0.15	4.1	0.30	1.10	
	VXE2341-00	0.35				



• Refer to “Glossary of Terms” on page 26 for details on the max. operating pressure differential and the max. system pressure.

Fluid and Ambient Temperature

Fluid temperature (°C)		Ambient temperature (°C)
Solenoid valve option symbol		
Nil, R	V	
–10 ^{Note)} to 60	–10 ^{Note)} to 60	–20 to 60



Note) Dew point temperature: –10°C or less

Valve Leakage Rate

Internal Leakage

Seal material	Leakage	
	Air	Non-leak/ Medium vacuum ^{Note)}
NBR, FKM	1 cm ³ /min or less	10 ^{–6} Pa·m ³ /sec or less

External Leakage

Seal material	Leakage	
	Air	Non-leak/ Medium vacuum ^{Note)}
NBR, FKM	1 cm ³ /min or less	10 ^{–6} Pa·m ³ /sec or less



Note) Value for V and M options (Non-leak/Medium vacuum)

How to Order (Solenoid Valve for Manifold)

DC VXE 21 2 1 - 00 - 5 G 1

Model
Refer to Table (1) shown below for availability.

Orifice diameter
Refer to Table (1) shown below for availability.

Valve/Body configuration
1 N.C. (for Manifold)

Solenoid valve option
Refer to Table (2) shown below for availability.

Suffix

Nil	—
Z	Oil-free

Select Nil because the solenoid valve V, R options are oil-free treatment.

Rated voltage

5	24 VDC
6	12 VDC


* Refer to Table (3) shown below for availability.




Refer to page 144 for ordering coil only.

Electrical entry


G-Grommet




C-Conduit



T -With conduit terminal
TL -With conduit terminal and light



D -DIN terminal
DL -DIN terminal with light
DO -For DIN terminal (without connector, with gasket)



* Refer to Table (3) for available combinations between electrical option (L) and rated voltage.

How to Order Manifold Bases

VVX21 VVX22 VVX23 1 - 07 - 1

Port size (Individual port)

1	Rc1/8
2	Rc1/4

* Common port sizes are all Rc3/8.

Thread type

Nil	Rc
T	NPTF
F	G
N	NPT

Number of manifolds

02	2 stations
10	10 stations

Suffix

Nil	—
Z	Oil-free

Base type

Nil	Common SUP
V	Individual SUP

• Blanking plate part no.

For VXE21: VX011-001
For VXE22/23: VX011-006

Seal material

Nil	NBR
F	FKM


How to Order Manifold Assemblies (Example)

Enter the valve and blanking plate to be mounted under the manifold base part number.

Example

VVX211-05-1 1 set "*" is the symbol for mounting.
* VXE2111-00-1G1 ... 4 sets Add an "*" in front of the part numbers
* VX011-001..... 1 set for solenoid valves, etc. to be mounted.

Station 1 2 3 4 5 n

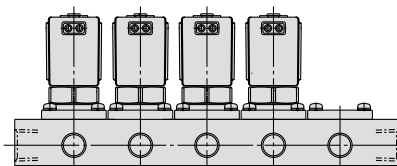

Enter the product's part number in order, counting the 1st station from the left in the manifold arrangement, when viewing the individual port in front.

Table (1) Model/Orifice Diameter

Solenoid valve model	Orifice symbol (Diameter)			
	1 (2 mmø)	2 (3 mmø)	3 (4.5 mmø)	4 (6 mmø)
VXE21	●	●	●	—
VXE22	—	●	●	●
VXE23	—	●	●	●

Table (2) Solenoid Valve Option

Option symbol	Body/Base material	Seal material	Note
Nil	Aluminum	NBR	—
V		FKM	Non-leak/Medium vacuum/Oil-free
R			Non-leak/Copper-free/Oil-free (Note)

(Note) The nuts (non-wetted parts) are nickel plated on the C37 material.

Table (3) Rated Voltage – Electrical Option

Rated voltage		L (With light)
Voltage symbol	Voltage	
5	24 VDC	●
6	12 VDC	—


Dimensions → page 116 (Manifold)

For Water /Single Unit

Model/Valve Specifications

N.C.

Passage symbol



Normally Closed (N.C.)

Port size	Orifice dia. (mmø)	Model	Max. operating pressure differential (MPa)	Flow characteristics		Max. system pressure (MPa)	(Note) Mass (g)	
				Av x 10 ⁻⁶ m ²	Cv converted			
1/8 (6A)	2	VXE2110-01	1.5	4.1	0.17	3.0	300	
	3	VXE2120-01	0.5	7.9	0.33			
	4.5	VXE2130-01	0.2	15.0	0.61			
1/4 (8A)	2	VXE2110-02	1.5	4.1	0.17	3.0	470 620 300 470 620 470 620	
	3	VXE2120-02	0.5	7.9	0.33			
		VXE2220-02	1.5					
		VXE2320-02	3.0					
	4.5	VXE2130-02	0.2	15.0	0.61			
		VXE2230-02	0.35					
		VXE2330-02	0.9					
	6	VXE2240-02	0.15	26.0	1.10	1.0	560 700 560 700	
		VXE2340-02	0.3					
	8	VXE2250-02	0.08	38.0	1.60	1.0	560 700	
		VXE2350-02	0.2					
	10	VXE2260-02	0.03	46.0	1.90	1.0	560 700	
		VXE2360-02	0.07					
3/8 (10A)	3	VXE2220-03	1.5	7.9	0.33	3.0	470 620 470 620 470 620	
		VXE2320-03	3.0					
	4.5	VXE2230-03	0.35	15.0	0.61			
		VXE2330-03	0.9					
	6	VXE2240-03	0.15	26.0	1.10			
		VXE2340-03	0.3					
	8	VXE2250-03	0.08	38.0	1.60	1.0	560 700 560 700	
		VXE2350-03	0.2					
	10	VXE2260-03	0.03	53.0	2.20			
		VXE2360-03	0.07					
1/2 (15A)	10	VXE2260-04	0.03	53.0	2.20	1.0	560 700	
		VXE2360-04	0.07					



Note) Mass of grommet type. Add 10 g for conduit, 30 g for DIN terminal, and 60 g for conduit terminal type respectively.

- Refer to "Glossary of Terms" on page 26 for details on the max. operating pressure differential and the max. system pressure.

Fluid and Ambient Temperature

Fluid temperature (°C)	Ambient temperature (°C)
Solenoid valve option symbol	
Nil, G, L	
1 to 60	-20 to 60



Note) With no freezing

Valve Leakage Rate

Internal Leakage

Seal material	Leakage (Water)
NBR, FKM	0.1 cm ³ /min or less

External Leakage

Seal material	Leakage (Water)
NBR, FKM	0.1 cm ³ /min or less

How to Order (Single Unit)

DC VXE 21 2 0 - 01 - 5 G 1 -

Model
Refer to Table (1) shown below for availability.

Orifice diameter
Refer to Table (1) shown below for availability.

Valve/Body configuration
0 N.C. / Single unit

Solenoid valve option
Refer to Table (2) shown below for availability.

Suffix

Nil	—
Z	Oil-free

 Select Nil because the solenoid valve L option is oil-free treatment.

Port size
Refer to Table (1) shown below for availability.

Bracket

Nil	None
B	With bracket

 * VX021N-12A and VX022N-12A are packed in the same container as the main body.
 * Refer to Table (4) if a bracket is ordered separately.

Rated voltage





5	24 VDC
6	12 VDC

 * Refer to Table (3) shown below for availability.

Thread type

Nil	Rc
T	NPTF
F	G
N	NPT

Electrical entry

G-Grommet 	C-Conduit 
T -With conduit terminal TL -With conduit terminal and light 	D -DIN terminal DL -DIN terminal with light DO -For DIN terminal (without connector, with gasket) 

* Refer to Table (3) for available combinations between electrical option (L) and rated voltage.

Table (1) Model/Orifice Diameter/Port Size
Normally Closed (N.C.)

Solenoid valve model (Port size)				Orifice symbol (Diameter)					
Model	VXE21	VXE22	VXE23	1 (2 mmø)	2 (3 mmø)	3 (4.5 mmø)	4 (6 mmø)	5 (8 mmø)	6 (10 mmø)
Port symbol (Port size)	01 (1/8)	—	—	●	●	●	—	—	—
	02 (1/4)	—	—	●	●	●	—	—	—
	—	02 (1/4)	02 (1/4)	—	●	●	●	●	●
	—	03 (3/8)	03 (3/8)	—	●	●	●	●	●
	—	04 (1/2)	04 (1/2)	—	—	—	—	—	●

Table (3) Rated Voltage – Electrical Option

Rated voltage		L (With light)
Voltage symbol	Voltage	
5	24 VDC	●
6	12 VDC	—

Table (2) Solenoid Valve Option

Option symbol	Seal material	Body material	Note
Nil	NBR	Brass (C37)	—
G		Stainless steel	
L	FKM	Stainless steel	High corrosive/Oil-free

Table (4) Bracket Part No.

Model	Part no.
VXE21 ¹ / ₃ 0	VX021N-12A
VXE22 ² / ₄ 0	VX022N-12A
VXE23 ³ / ₄ 0	
VXE22 ⁵ / ₆ 0	VX023N-12A-L
VXE23 ⁵ / ₆ 0	

Dimensions → page 114 (Single unit)



Series VXE21/22/23

For Water /Manifold

Solenoid Valve for Manifold/Valve Specifications

N.C.

Passage symbol



Normally Closed (N.C.)

Orifice dia. (mmø)	Model	Max. operating pressure differential (MPa)	Flow characteristics		Max. system pressure (MPa)
			Av x 10 ⁻⁶ m ²	Cv converted	
2	VXE2111	1.5	4.1	0.17	3.0
3	VXE2121	0.5	7.9	0.33	
	VXE2221	1.5			
	VXE2321	3.0			
4.5	VXE2131	0.2	15	0.61	
	VXE2231	0.35			
	VXE2331	0.9			
6	VXE2241	0.15	26	1.10	
	VXE2341	0.3			



• Refer to “Glossary of Terms” on page 26 for details on the max. operating pressure differential and the max. system pressure.

Fluid and Ambient Temperature

Fluid temperature (°C)	Ambient temperature (°C)
Solenoid valve option symbol	
Nil, G, L	
1 to 60	–20 to 60



Note) With no freezing

Valve Leakage Rate

Internal Leakage

Seal material	Leakage (Water)
NBR, FKM	0.1 cm ³ /min or less

External Leakage

Seal material	Leakage (Water)
NBR, FKM	0.1 cm ³ /min or less

How to Order (Solenoid Valve for Manifold)

DC VXE 21 2 1 - 5 G 1

Model • Refer to Table (1) shown below for availability.

Orifice diameter • Refer to Table (1) shown below for availability.

Valve/Body configuration •

1	N.C. (for Manifold)
---	---------------------

Solenoid valve option • Refer to Table (2)-(1) shown below for availability.

Suffix •

Nil	—
Z	Oil-free





Select Nil because the solenoid valve L option is oil-free treatment.

Rated voltage •

5	24 VDC
6	12 VDC

* Refer to Table (3) shown below for availability.

Electrical entry

G-Grommet 	C-Conduit 
T -With conduit terminal TL -With conduit terminal and light 	D -DIN terminal DL -DIN terminal with light DO -For DIN terminal (without connector, with gasket) 

* Refer to Table (3) for available combinations between electrical option (L) and rated voltage.



Refer to page 144 for ordering coil only.

How to Order Manifold Bases

VVX21 VVX22 VVX23

1 C - 07 - 1

Port size (OUT port) •

1	Rc1/8
2	Rc1/4

* IN port sizes are all Rc3/8.

Thread type •

Nil	Rc
T	NPTF
F	G
N	NPT

Number of manifolds •

02	2 stations
...	...
10	10 stations

Suffix •

Nil	—
Z	Oil-free

Base/Seal material • * Refer to Table (2)-(2) shown below for availability.

Blanking plate part no.

For VXE21: VVX21-3A—

For VXE22: VVX22-3A—

For VXE23: VVX23-3A—

Seal material •

Nil	NBR
F	FKM
E	EPDM

Table (1) Model/Orifice Diameter

Solenoid valve model	Orifice symbol (Diameter)			
	1 (2 mmø)	2 (3 mmø)	3 (4.5 mmø)	4 (6 mmø)
VXE21	●	●	●	—
VXE22	—	●	●	●
VXE23	—	●	●	●

Table (2) Solenoid Valve Option

Solenoid valve option symbol (1)	Base/Seal material symbol (2)	Body/Base material	Seal material	Note
Nil	C	Brass (C37)	NBR	—
G	S	Stainless steel		
L	SF	Stainless steel	FKM	High corrosive/Oil-free

Table (3) Rated Voltage – Electrical Option

Rated voltage		L (With light)
Voltage symbol	Voltage	
5	24 VDC	●
6	12 VDC	—


How to Order Manifold Assemblies (Example)

Enter the valve and blanking plate to be mounted under the manifold base part number.

Example

VVX211C-05-1 1 set “*” is the symbol for mounting.
 * VXE2111-1G1 4 sets Add an “*” in front of the part numbers
 * VVX21-3A 1 set for solenoid valves, etc. to be mounted.

① — ② — ③ — ④ — ⑤ — n

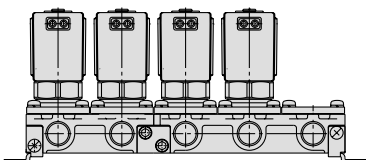

Enter the product's part number in order, counting the 1st station from the left in the manifold arrangement, when viewing the individual port in front.

Dimensions → page 117 (Manifold)

For Oil /Single Unit


⚠ When the fluid is oil.

The dynamic viscosity of the fluid must not exceed 50 mm²/s.

Model/Valve Specifications

N.C.

Passage symbol



Normally Closed (N.C.)

Port size	Orifice dia. (mmø)	Model	Max. operating pressure differential (MPa)	Flow characteristics		Max. system pressure (MPa)	(Note) Mass (g)	
				Av x 10 ⁻⁶ m ²	Cv converted			
1/8 (6A)	2	VXE2110-01	1.5	4.1	0.17	3.0	300	
	3	VXE2120-01	0.5	7.9	0.33			
	4.5	VXE2130-01	0.15	15	0.61			
1/4 (8A)	2	VXE2110-02	1.5	4.1	0.17	3.0	300	
	3	VXE2120-02	0.5	7.9	0.33			470
		VXE2220-02	1.2					
		VXE2320-02	2.0					
	4.5	VXE2130-02	0.15	15	0.61			300
		VXE2230-02	0.3					
		VXE2330-02	0.85					
	6	VXE2240-02	0.1	26	1.10	470		
		VXE2340-02	0.3					
	8	VXE2250-02	0.08	38	1.60	1.0	560	
		VXE2350-02	0.2				700	
		VXE2260-02	0.03				560	
		VXE2360-02	0.07				700	
	3/8 (10A)	3	VXE2220-03	1.2	7.9	0.33	3.0	470
			VXE2320-03	2.0				620
4.5		VXE2230-03	0.3	15	0.61	470		
		VXE2330-03	0.85			620		
6		VXE2240-03	0.1	26	1.10	470		
		VXE2340-03	0.3			620		
8		VXE2250-03	0.08	38	1.60	1.0	560	
		VXE2350-03	0.2				700	
		VXE2260-03	0.03				560	
	VXE2360-03	0.07	700					
1/2 (15A)	10	VXE2260-04	0.03	53	2.20	1.0	560	
		VXE2360-04	0.07				700	



Note) Mass of grommet type. Add 10 g for conduit, 30 g for DIN terminal, and 60 g for conduit terminal type respectively.

- Refer to "Glossary of Terms" on page 26 for details on the max. operating pressure differential and the max. system pressure.

Fluid and Ambient Temperature

Fluid temperature (°C)	Ambient temperature (°C)
Solenoid valve option symbol	
A, H	
-5 Note) to 60	-20 to 60



Note) Dynamic viscosity: 50 mm²/s or less

Valve Leakage Rate

Internal Leakage

Seal material	Leakage (Oil)
FKM	0.1 cm ³ /min or less

External Leakage

Seal material	Leakage (Oil)
FKM	0.1 cm ³ /min or less

How to Order (Single Unit)

DC VXE 21 2 0 A [] - 01 [] - 5 G 1 - []

Model
Refer to Table (1) shown below for availability.

Orifice diameter
Refer to Table (1) shown below for availability.

Valve/Body configuration
0 N.C. / Single unit

Solenoid valve option
Refer to Table (2) shown below for availability.

Suffix
Nil —
Z Oil-free





Port size
Refer to Table (1) shown below for availability.

Bracket
Nil None
B With bracket
* VX021N-12A and VX022N-12A are packed in the same container as the main body.
* Refer to Table (4) if a bracket is ordered separately.

Rated voltage
5 24 VDC
6 12 VDC
* Refer to Table (3) shown below for availability.
Refer to page 144 for ordering coil only.

Thread type
Nil Rc
T NPTF
F G
N NPT

Electrical entry

G-Grommet 	C-Conduit 
T -With conduit terminal TL -With conduit terminal and light 	D -DIN terminal DL -DIN terminal with light DO -For DIN terminal (without connector, with gasket)  Connector

* Refer to Table (3) for available combinations between electrical option (L) and rated voltage.

Table (1) Model/Orifice Diameter/Port Size Normally Closed (N.C.)

Solenoid valve model (Port size)				Orifice symbol (Diameter)					
Model	VXE21	VXE22	VXE23	1 (2 mmø)	2 (3 mmø)	3 (4.5 mmø)	4 (6 mmø)	5 (8 mmø)	6 (10 mmø)
Port symbol (Port size)	01 (1/8)	—	—	●	●	●	—	—	—
	02 (1/4)	—	—	●	●	●	—	—	—
	—	02 (1/4)	02 (1/4)	—	●	●	●	●	●
	—	03 (3/8)	03 (3/8)	—	●	●	●	●	●
	—	04 (1/2)	04 (1/2)	—	—	—	—	—	●

Table (3) Rated Voltage – Electrical Option

Rated voltage		L (With light)
Voltage symbol	Voltage	
5	24 VDC	●
6	12 VDC	—

Table (2) Solenoid Valve Option

Option symbol	Seal material	Body material
A	FKM	Brass (C37)
H		Stainless steel

The additives contained in oil are different depending on the type and manufacturers, so the durability of seal materials will vary. For details, please consult with SMC.

Table (4) Bracket Part No.

Model	Part no.
VXE21 $\frac{1}{8}$	VX021N-12A
VXE22 $\frac{3}{4}$	VX022N-12A
VXE23 $\frac{3}{4}$	
VXE22 $\frac{5}{8}$	VX023N-12A-L
VXE23 $\frac{5}{8}$	



Series **VXE21/22/23**

For Oil/Manifold

Solenoid Valve for Manifold/Valve Specifications

N.C.

Passage symbol



Normally Closed (N.C.)

Orifice dia. (mmø)	Model	Max. operating pressure differential (MPa)	Flow characteristics		Max. system pressure (MPa)
			Av x 10 ⁻⁶ m ²	Cv converted	
2	VXE2111	1.5	4.1	0.17	3.0
3	VXE2121	0.5	7.9	0.33	
	VXE2221	1.2			
	VXE2321	2.0			
4.5	VXE2131	0.15	15	0.61	
	VXE2231	0.3			
	VXE2331	0.85			
6	VXE2241	0.1	26	1.10	
	VXE2341	0.3			



• Refer to "Glossary of Terms" on page 26 for details on the max. operating pressure differential and the max. system pressure.

⚠ When the fluid is oil.
The dynamic viscosity of the fluid must not exceed 50 mm²/s.

Fluid and Ambient Temperature

Fluid temperature (°C)	Ambient temperature (°C)
Solenoid valve option symbol	
A, H	
-5 ^{Note)} to 60	-20 to 60



Note) Dynamic viscosity: 50 mm²/s or less

Valve Leakage Rate

Internal Leakage

Seal material	Leakage (Oil)
FKM	0.1 cm ³ /min or less

External Leakage

Seal material	Leakage (Oil)
FKM	0.1 cm ³ /min or less

How to Order (Solenoid Valve for Manifold)

DC VXE 21 2 1 A - 5 G 1

Model
Refer to Table (1) shown below for availability.

Orifice diameter
Refer to Table (1) shown below for availability.

Valve/Body configuration
1 N.C. (for Manifold)

Solenoid valve option
Refer to Table (2)-(1) shown below for availability.

Suffix

Nil	—
Z	Oil-free

Rated voltage

5	24 VDC
6	12 VDC

* Refer to Table (3) shown below for availability.

Refer to page 144 for ordering coil only.

Electrical entry

G-Grommet 	C-Conduit
T - With conduit terminal TL - With conduit terminal and light	D - DIN terminal DL - DIN terminal with light DO - For DIN terminal (without connector, with gasket)

* Refer to Table (3) for available combinations between electrical option (L) and rated voltage.

How to Order Manifold Bases

VVX21
VVX22
VVX23

1 **CF** **-07-1**

Port size (OUT port)

1	Rc1/8
2	Rc1/4

* IN port sizes are all Rc3/8.

Thread type

Nil	Rc
T	NPTF
F	G
N	NPT

Number of manifolds

02	2 stations
...	...
10	10 stations

Suffix

Nil	—
Z	Oil-free

Base/Seal material
* Refer to Table (2)-(2) shown below for availability.

Blanking plate part no.
For VXE21: VVX21-3A-F
For VXE22: VVX22-3A-F
For VXE23: VVX23-3A-F

Seal material: FKM

Table (1) Model/Orifice Diameter

Solenoid valve model	Orifice symbol (Diameter)			
	1 (2 mmø)	2 (3 mmø)	3 (4.5 mmø)	4 (6 mmø)
VXE21	●	●	●	—
VXE22	—	●	●	●
VXE23	—	●	●	●

Table (2) Solenoid Valve Option

Solenoid valve option symbol (1)	Base/Seal material symbol (2)	Body/Base material	Seal material
A	CF	Brass (C37)	FKM
H	SF	Stainless steel	

The additives contained in oil are different depending on the type and manufacturers, so the durability of seal materials will vary. For details, please consult with SMC.

Table (3) Rated Voltage – Electrical Option

Rated voltage		L (With light)
Voltage symbol	Voltage	
5	24 VDC	●
6	12 VDC	—


How to Order Manifold Assemblies (Example)

Enter the valve and blanking plate to be mounted under the manifold base part number.

Example

VVX211CF-05-1 1 set “*” is the symbol for mounting.
* VXE2111A-1G1 4 sets Add an “*” in front of the part numbers
* VVX21-3A-F 1 set for solenoid valves, etc. to be mounted.

① — ② — ③ — ④ — ⑤ — n

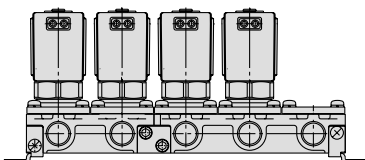

Enter the product's part number in order, counting the 1st station from the left in the manifold arrangement, when viewing the individual port in front.

Dimensions → page 117 (Manifold)


Series VXE21/22/23

For Air/Water/Oil

Construction: Single Unit

Normally closed (N.C.)

Body material: Brass (C37), Stainless steel

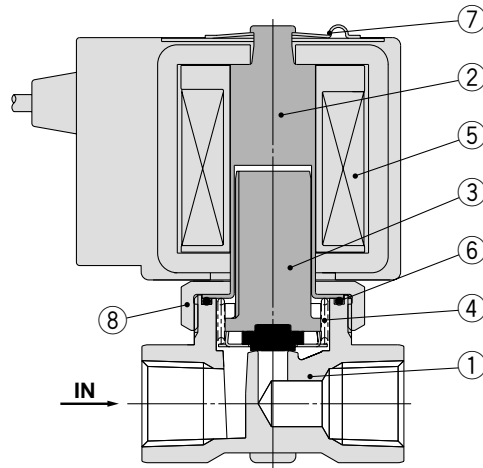

Component Parts


No.	Description	Material	
		Brass (C37) body specification	Stainless steel body specification
1	Body	Brass (C37)	Stainless steel
2	Tube assembly	Stainless steel	
3	Armature assembly	(NBR, FKM, EPDM, PTFE) Stainless steel, PPS	
4	Return spring	Stainless steel	
5	Solenoid coil	—	
6	O-ring	(NBR, FKM, EPDM, PTFE)	
7	Clip	SK	
8	Nut	Brass (C37)	Brass (C37), Ni plated

The materials in parentheses are seal materials.


Construction: Manifold

Normally closed (N.C.)
Base material: Aluminum
Fluid: Air

Common SUP

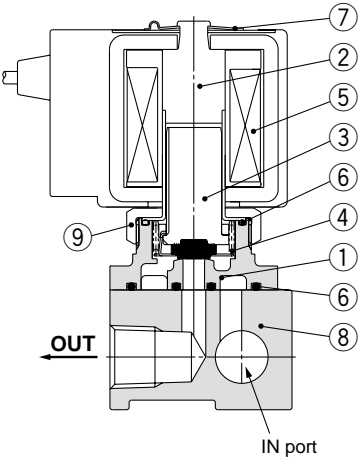


Individual SUP

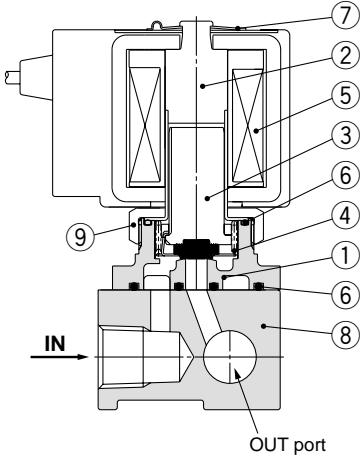

Base material: Brass (C37), Stainless steel
Fluid: Water/Oil

Common SUP

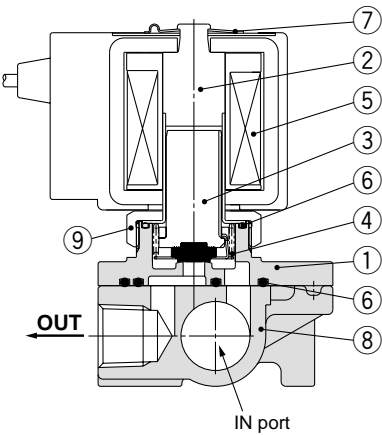

Component Parts

No.	Description	Material		
		Aluminum base specification	Brass (C37) base specification	Stainless steel base specification
1	Body	Aluminum	Brass (C37)	Stainless steel
2	Tube assembly	Stainless steel		
3	Armature assembly	(NBR, FKM, EPDM, PTFE) Stainless steel, PPS		
4	Return spring	Stainless steel		
5	Solenoid coil	—		
6	O-ring	(NBR, FKM, EPDM, PTFE)		
7	Clip	SK		
8	Base	Aluminum	Brass (C37)	Stainless steel
9	Nut	Brass (C37) (Ni plated)	Brass (C37)	Brass (C37), Ni plated

The materials in parentheses are seal materials.

VX2
VXD
VXZ
VXE
VXP
VXR
VXH
VXF
VX3
VXA
VCH□
VDW
VQ
LVM
VCA
VCB
VCL
VCS
VCW


Series VXE21/22/23

For Air/Water/Oil


Dimensions: Single Unit/Body Material: Brass (C37), Stainless Steel

VXE21□0/22□0/23□0


Grommet: G

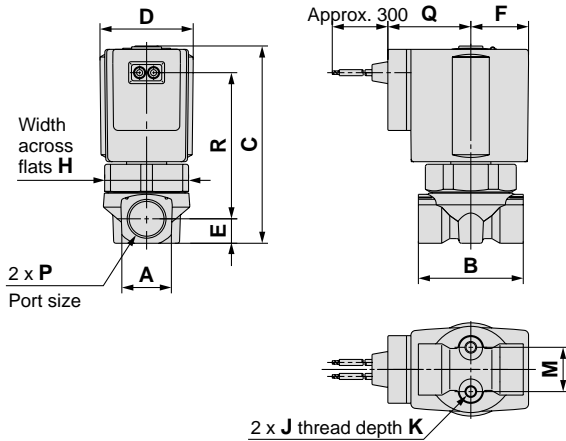


Conduit: C

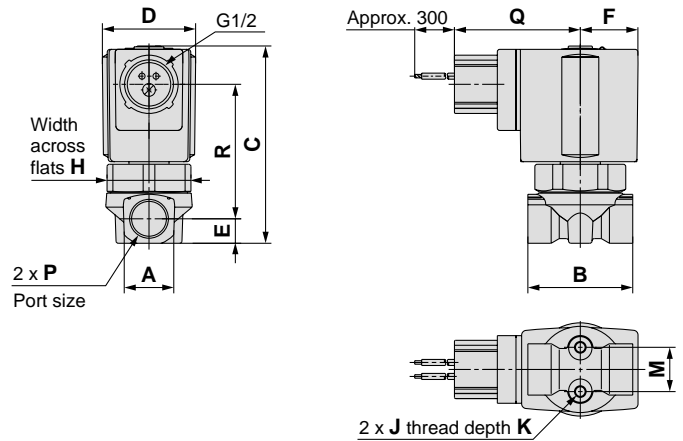

DIN terminal: D

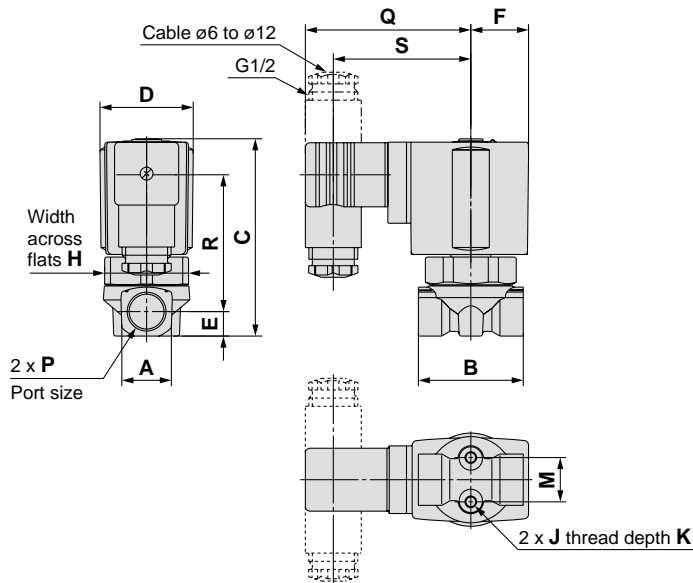

Conduit terminal: T

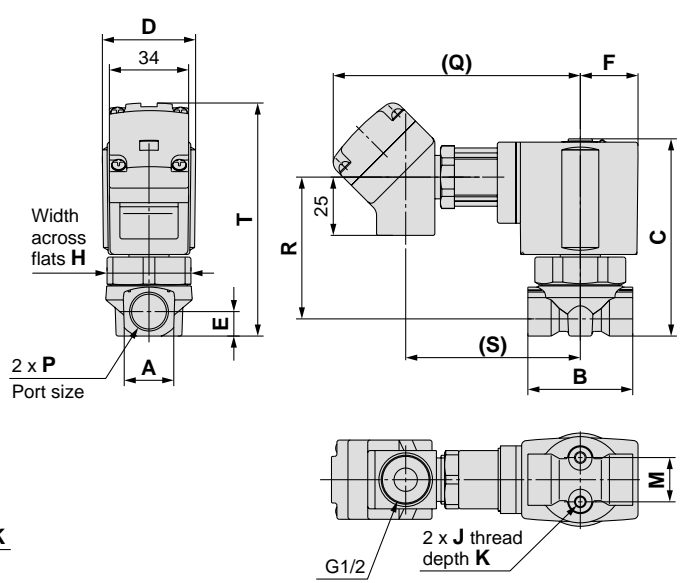

(mm)

Model	Orifice diameter	Port size P	A	B	C	D	E	F	H	Electrical entry													
										Mounting dimension			Grommet		Conduit		DIN terminal			Conduit terminal			
N.C.										J	K	M	Q	R	Q	R	Q	R	S	Q	R	S	T
VXE21□0	ø2, ø3, ø4.5	1/8, 1/4	18	40	68	30	9	19.5	27	M4	6	12.8	30	46	48.5	41	65.5	42	53.5	100.5	41	69.5	82
VXE22□0	ø3, ø4.5, ø6	1/4, 3/8	22	45	78	35	10.5	22.5	32	M5	8	19	33	56	51.5	51	68.5	52	56.5	103.5	51	72.5	93.5
VXE22□0	ø8, ø10	1/4, 3/8, 1/2	30	50	85	40	14			M5	8	23	33	59	51.5	54	68.5	55	56.5	103.5	54	72.5	100
VXE23□0	ø3, ø4.5, ø6	1/4, 3/8	22	45	85.5	40	10.5	25	36	M5	8	19	36	62	54	57	71	58	59	106	57	75	99.5
VXE23□0	ø8, ø10	1/4, 3/8, 1/2	30	50	92	40	14			M5	8	23	36	65	54	60	71	61	59	106	60	75	106

Dimensions: Single Unit/Body Material: Brass (C37), Stainless Steel

VXE21□0/22□0/23□0



Specifications with bracket

Orifice: ø2, ø3, ø4.5, ø6

(Packed in the same container)

Orifice: ø8, ø10

(Assembled at the shipment)

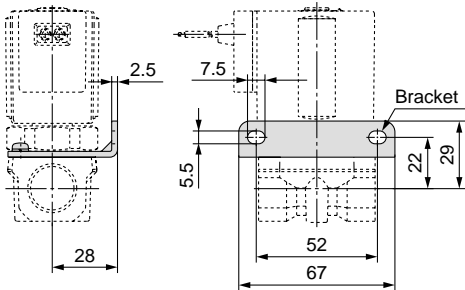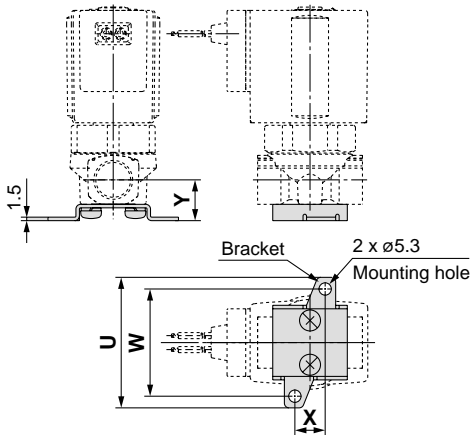

(mm)

Model	Orifice diameter	Port size P	Bracket mounting dimension			
			U	W	X	Y
N.C.						
VXE21□0	ø2, ø3, ø4.5	1/8, 1/4	46	36	11	15
VXE22□0	ø3, ø4.5, ø6	1/4, 3/8	56	46	13	17.5
VXE22□0	ø8, ø10	1/4, 3/8, 1/2	—	—	—	—
VXE23□0	ø3, ø4.5, ø6	1/4, 3/8	56	46	13	17.5
VXE23□0	ø8, ø10	1/4, 3/8, 1/2	—	—	—	—

VX2

VXD

VXZ

VXE

VXP

VXR

VXH

VXF

VX3

VXA

VCH□

VDW

VQ

LVM

VCA

VCB

VCL

VCS




VCW

Series **VXE21/22/23**

For Air

Dimensions: Manifold/Base Material: Aluminum

Normally closed (N.C.): VXE21/22/23

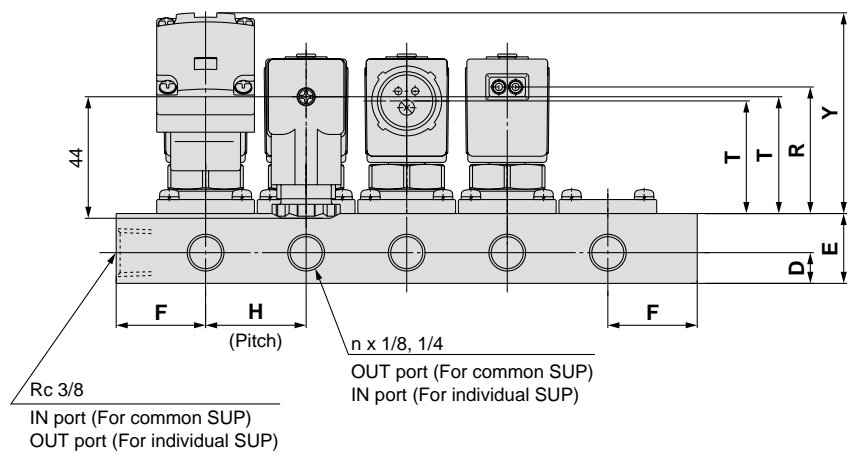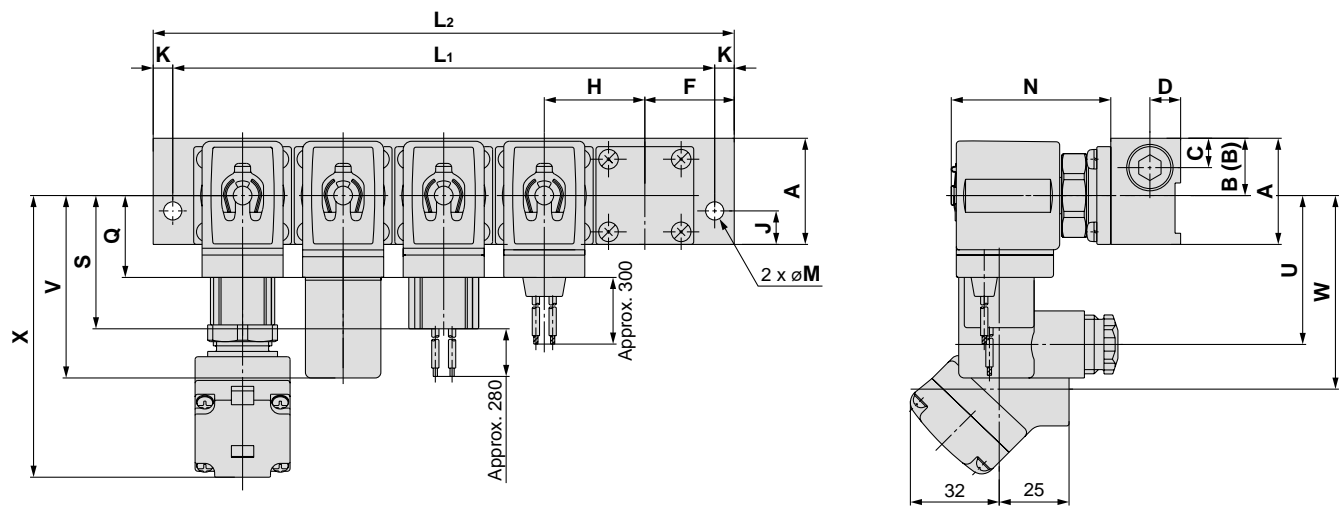

(mm)


Model	Dimension	n (stations)								
		2	3	4	5	6	7	8	9	10
VVXE21	L ₁	86	122	158	194	230	266	302	338	374
	L ₂	100	136	172	208	244	280	316	352	388
VVXE22	L ₁	108	154	200	246	292	338	384	430	476
VVXE23	L ₂	126	172	218	264	310	356	402	448	494

(mm)


Model	A	B	(B) Individual SUP	C	D	E	F	H	J	K	M	N	Electrical entry									
													Grommet		Conduit		DIN terminal			Conduit terminal		
													Q	R	S	T	U	V	T	W	X	Y
VVXE21	38	20.5	17.5	10.5	11	25	32	36	12	7	6.5	57.5	30	44.5	48.5	40	53.5	65.5	41	69.5	100.5	72
VVXE22	49	26.5	22.5	13	13	30	40	46	15	9	8.5	66.5	33	54.5	51.5	50	56.5	68.5	51	72.5	103.5	82
VVXE23	49	26.5	22.5	13	13	30	40	46	15	9	8.5	71.5	36	59	54	54	59	71	55	75	106	86

Dimensions: Manifold/Base Material: Brass (C37), Stainless Steel

VXE21/22/23

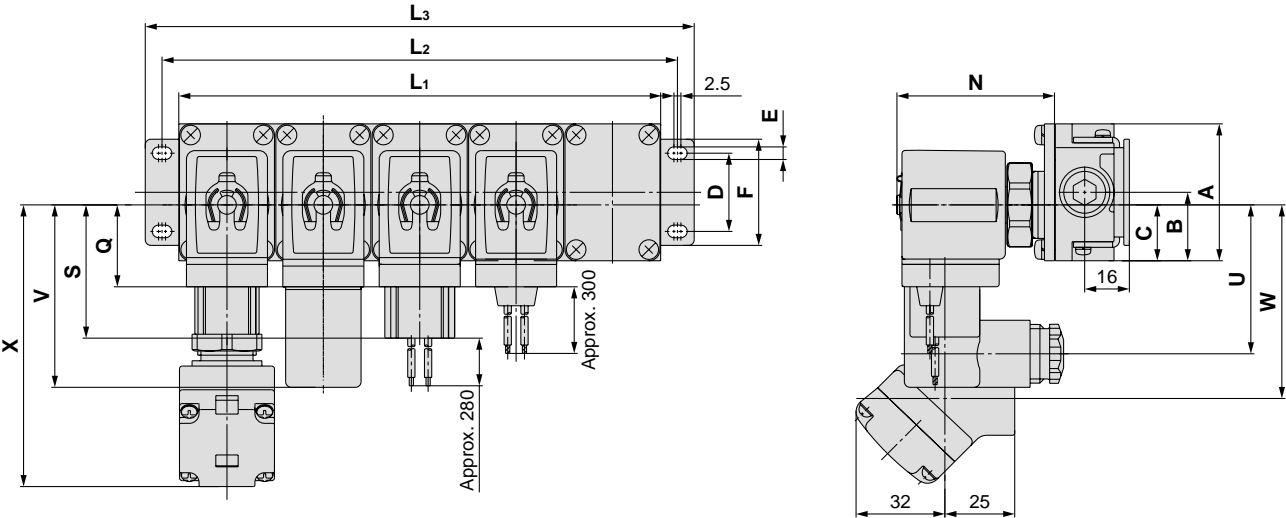

D side Stations 1 2 3 4 5 n U side

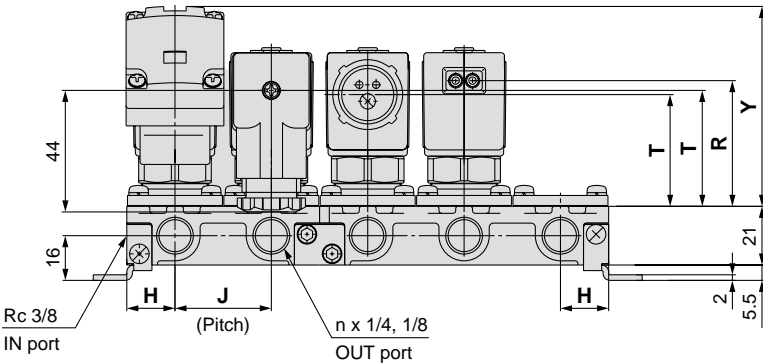

Model	Dimension	n (stations)								
		2	3	4	5	6	7	8	9	10
VXE21	L ₁	69	103.5	138	172.5	207	241.5	276	310.5	345
	L ₂	81	115.5	150	184.5	219	253.5	288	322.5	357
	L ₃	93	127.5	162	196.5	231	265.5	300	334.5	369
VXE22	L ₁	77	115.5	154	192.5	231	269.5	308	346.5	385
	L ₂	89	127.5	166	204.5	243	281.5	320	358.5	397
	L ₃	101	139.5	178	216.5	255	293.5	332	370.5	409
VXE23	L ₁	83	124.5	166	207.5	249	290.5	332	373.5	415
	L ₂	95	136.5	178	219.5	261	302.5	344	385.5	427
	L ₃	107	148.5	190	231.5	273	314.5	356	397.5	439
Manifold construction		2 stations x 1	3 stations x 1	2 stations x 2	2 stations + 3 stations	3 stations x 2	2 stations x 2 + 3 stations	2 stations + 3 stations x 2	3 stations x 3	2 stations x 2 + 3 stations x 2

Model	A	B	C	D	E	F	H	J	N	Electrical entry									
										Grommet		Conduit		DIN terminal			Conduit terminal		
										Q	R	S	T	U	V	T	W	X	Y
VXE21	49	24.5	20	28	4.5	38	17.3	34.5	56	30	43	48.5	38	53.5	65.5	39	69.5	100.5	70
VXE22	57	28.5	25.5	30	5.5	42	19.3	38.5	64.5	33	52.5	51.5	47.5	56.5	68.5	48.5	72.5	103.5	80
VXE23	57	28.5	25.5	30	5.5	42	20.8	41.5	72.5	36	60	54	55	59	71	56	75	106	87

VX2

VXD

VXZ

VXE

VXP

VXR

VXH

VXF

VX3

VXA

VCH

VDW

VQ

LVM

VCA

VCB

VCL

VCS


VCW

Energy Saving Type

Pilot Operated 2 Port Solenoid Valve

Series VXED21/22/23

For Air, Water, Oil



■ Valve

Normally closed (N.C.)

■ Solenoid Coil

Coil: Class B

■ Rated Voltage


24 VDC, 12 VDC

■ Material

Body — Brass (C37)/CAC407,
Stainless steel
Seal — NBR, FKM, EPDM

■ Electrical Entry

- Grommet
- Conduit
- DIN terminal
- Conduit terminal

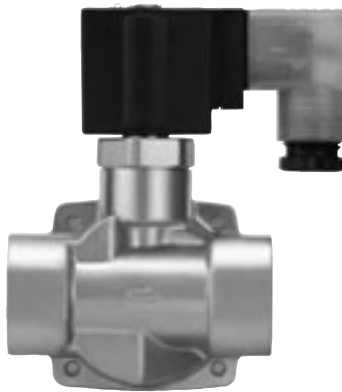

Model	VXED2130	VXED2140	VXED2150	VXED2260
Orifice diameter	10 mmø	—	—	—
	15 mmø	—	—	—
	20 mmø	—	—	—
	25 mmø	—	—	—
Port size (Thread)	1/4	3/8	3/4	1
	3/8	1/2		
	1/2			

Model	VXED2270	VXED2380	VXED2390
Orifice diameter	35 mmø	—	—
	40 mmø	—	—
	50 mmø	—	—
Port size (Flange)	32A	40A	50A

VX2

VXD

VXZ

VXE

VXP

VXR

VXH

VXF

VX3

VXA

VCH□

VDW

VQ

LVM

VCA

VCB

VCL

VCS

VCW

Series *VXED21/22/23*

Common Specifications

Standard Specifications

Valve specifications	Valve construction	Pilot operated 2 port diaphragm type
	Valve type	N.C.
	Withstand pressure	8A to 25A: 5.0 MPa, 32A to 50A: 2.0 MPa
	Body material	Brass (C37), Stainless steel, CAC407
	Seal material	NBR, FKM, EPDM
	Enclosure	Dusttight, Low jetproof (IP65)
	Environment	Location without corrosive or explosive gases
Coil specifications	Rated voltage	24 VDC, 12 VDC
	Allowable voltage fluctuation	±10% of rated voltage
	Allowable leakage voltage	2% or less of rated voltage
	Coil insulation type	Class B
	Surge voltage suppressor	Built-in surge voltage suppressor

Solenoid Coil Specifications

Normally Closed (N.C.)

DC Specification

Model	Power consumption (W) (Holding)	Inrush current (A) (Inrush time: 200 ms) <small>Note 1)</small>		Temperature increase (°C) <small>Note 2)</small>
		24 VDC	12 VDC	
VXED2130	1.8	0.23	0.46	30
VXED2140/2150	1.5	0.19	0.38	25
VXED2260/2270	2.3	0.29	0.58	25
VXED2380/2390	3	0.44	0.88	30

Note 1) Energizing time should be 200 ms or longer.

Note 2) Value for ambient temperature at 20°C and when the rated voltage is applied.

Contents

For Air	P.122
For Water	P.124
For Oil	P.126
Construction	P.128
Dimensions	P.129
Replacement Parts	P.144

Applicable Fluid Check List

Energy Saving Type / Pilot Operated 2 Port Solenoid Valve Series VXED21/22/23

All Options (8A to 25A)



Refer to pages 122, 124, and 126 for specifications and models.



VXED2 ³₂ ⁴₅ 0 - - 1 -

• Option symbol

Fluid and application	Option symbol	Seal material	Body material
Air	Nil	NBR	Brass (C37)
	G		Stainless steel
Water	Nil	NBR	Brass (C37)
	G		Stainless steel
Oil (Note 2)	A	FKM	Brass (C37)
	H		Stainless steel
High corrosive/Oil-free	L (Note 1)	FKM	Stainless steel
Copper-free/Fluorine-free (Note 3)	J	EPDM	Stainless steel
Other combination	B	EPDM	Brass (C37)

Note 1) The L option is oil-free treatment.

Note 2) The dynamic viscosity of the fluid must not exceed 50 mm²/s or less.

Note 3) The nuts (non-wetted parts) are nickel plated on the C37 material.

* If using for other fluids, please consult with SMC.

All Options (32A to 50A)



Refer to pages 122, 124, and 126 for specifications and models.


VXED2 ²₃ ⁷₈ 0 - - 1 -

• Option symbol

Fluid and application	Option symbol	Seal material	Body material
Air	Nil	NBR	CAC407
Water	Nil	NBR	
Oil (Note)	A	FKM	
Other combination	B	EPDM	

Note) The dynamic viscosity of the fluid must not exceed 50 mm²/s or less.

* If using for other fluids, please consult with SMC.



VX2

VXD

VXZ

VXE

VXP

VXR

VXH

VXF

VX3

VXA

VCH ☐

VDW

VQ

LVM

VCA

VCB

VCL

VCS

VCW

Series VXED21/22/23



For Air

(Inert gas)

Model/Valve Specifications

N.C.

Passage symbol



Port size		Orifice diameter (mmø)	Model	Min. operating pressure differential (MPa)	Max. operating pressure differential (MPa)	Flow characteristics			Max. system pressure (MPa)	Mass (g) <small>(Note)</small>
						C	b	Cv		
Thread (Nominal size)	1/4 (8A)	10	VXED2130-02	0.02	0.7	8.5	0.35	2.0	1.5	420
		10	VXED2130-03			9.2		2.4		
	3/8 (10A)	15	VXED2140-03		1.0	18.0		5.0		
		10	VXED2130-04		0.7	9.2		2.4		
	1/2 (15A)	15	VXED2140-04		1.0	20.0		5.5		
	3/4 (20A)	20	VXED2150-06			38.0	0.30	9.5		

Port size		Orifice diameter (mmø)	Model	Min. operating pressure differential (MPa)	Max. operating pressure differential (MPa)	Flow characteristics	Max. system pressure (MPa)	^(Note) Mass (g)
						Effective area (mm²)		
Thread (Nominal size)	1 (25A)	25	VXED2260-10	0.02	1.0	225	1.5	1650
Flange	32A	35	VXED2270-32	0.03		415		5400
	40A	40	VXED2380-40			560		6800
	50A	50	VXED2390-50			880		8400



Note) Mass of grommet type. Add 10 g for conduit, 30 g for DIN terminal, and 60 g for conduit terminal type respectively.

• Refer to "Glossary of Terms" on page 26 for details on the max. operating pressure differential and the max. system pressure.

Fluid and Ambient Temperature

Fluid temperature (°C)	Ambient temperature (°C)
Solenoid valve option symbol	
Nil, G	
-10 to 60	-10 to 60

Note) Dew point temperature: -10°C or less

Valve Leakage Rate

Internal Leakage

Seal material	Leakage (Air)	
	1/4 to 1	32A to 50A
NBR	2 cm³/min or less	10 cm³/min or less

External Leakage

Seal material	Leakage (Air)	
	1/4 to 1	32A to 50A
NBR	1 cm³/min or less	1 cm³/min or less

Pilot Operated 2 Port Solenoid Valve *Series* **VXED21/22/23**

For Air

How to Order

DC **VXED** **21** **3** **0** **—** **—** **—** **—** **—** **02** **—** **—** **5** **G** **1** **—**

Model
Refer to Table (1) shown below for availability.

Orifice diameter
Refer to Table (1) shown below for availability.

Valve/Body configuration
0 N.C. / Single unit

Solenoid valve option
Refer to Table (2) shown below for availability.

Suffix

Nil	—
Z	Oil-free

Port size
Refer to Table (1) shown below for availability.


Bracket

Nil	None
B	With bracket

* Removal of bracket is not possible.

Rated voltage





5	24 VDC
6	12 VDC

* Refer to Table (3) shown below for availability.
 Refer to page 144 for ordering coil only.

Thread type

Nil	Rc
T	NPTF
F	G
N	NPT

Electrical entry

G-Grommet 	C-Conduit 
T -With conduit terminal TL -With conduit terminal and light 	D -DIN terminal DL -DIN terminal with light DO -For DIN terminal (without connector, with gasket)  Connector

* Refer to Table (3) for available combinations between electrical option (L) and rated voltage.

Table (1) Model/Orifice Diameter/Port Size
Normally Closed (N.C.)

Solenoid valve model (Port size)				Orifice diameter							Material	
Model	VXED21	VXED22	VXED23	3 (10 mmø)	4 (15 mmø)	5 (20 mmø)	6 (25 mmø)	7 (35 mmø)	8 (40 mmø)	9 (50 mmø)	Body	Seal
Port symbol (Port size)	Thread	02 (1/4)	—	—	●	—	—	—	—	—	Brass (C37) Stainless steel	NBR
		03 (3/8)	—	—	●	—	—	—	—	—		
		04 (1/2)	—	—	●	—	—	—	—	—		
		06 (3/4)	—	—	—	●	—	—	—	—		
	Flange	—	10 (1)	—	—	—	●	—	—	—	CAC407	NBR
		—	32 (32A)	—	—	—	—	●	—	—		
		—	—	—	—	—	—	—	●	—		
		—	—	—	—	—	—	—	—	●		

Table (2) Solenoid Valve Option

Option symbol	Seal material	Body material
Nil	NBR	Brass (C37), CAC407
G (Note)		Stainless steel

Note 1) The G option (stainless steel specification) is for port size 1/4 to 1 only.

Note 2) Select nil because the L option is the oil-free treatment.


Table (3) Rated Voltage – Electrical Option

Rated voltage		L (With light)
Voltage symbol	Voltage	
5	24 VDC	●
6	12 VDC	—

For Water

Model/Valve Specifications

N.C.



Port size		Orifice diameter (mmø)	Model	Min. operating pressure differential (MPa)	Max. operating pressure differential (MPa)	Flow characteristics		Max. system pressure (MPa)	^(Note) Mass (g)
						Av x 10 ⁻⁶ m ²	Cv converted		
Thread (Nominal size)	1/4 (8A)	10	VXED2130-02	0.02	0.5	46	1.9	1.5	420
	3/8 (10A)	10	VXED2130-03			58	2.4		
		15	VXED2140-03			110	4.5		
	1/2 (15A)	10	VXED2130-04		0.5	58	2.4		500
		15	VXED2140-04			130	5.5		670
	3/4 (20A)	20	VXED2150-06		1.0	230	9.5		1150
	1 (25A)	25	VXED2260-10			310	13		1650
Flange	32A	35	VXED2270-32	0.03	1.0	550	23	5400	
	40A	40	VXED2380-40			740	31	6800	
	50A	50	VXED2390-50			1200	49	8400	



Note) Mass of grommet type. Add 10 g for conduit, 30 g for DIN terminal, and 60 g for conduit terminal type respectively.

• Refer to "Glossary of Terms" on page 26 for details on the max. operating pressure differential and the max. system pressure.

Fluid and Ambient Temperature

Fluid temperature (°C)	Ambient temperature (°C)
Solenoid valve option symbol	
Nil, G, L	
1 to 60	-10 to 60

Note) With no freezing

Valve Leakage Rate

Internal Leakage

Seal material	Leakage (Water)	
	1/4 to 1	32A to 50A
NBR, FKM	0.2 cm ³ /min or less	1 cm ³ /min or less

External Leakage

Seal material	Leakage (Water)	
	1/4 to 1	32A to 50A
NBR, FKM	0.1 cm ³ /min or less	0.1 cm ³ /min or less

Pilot Operated 2 Port Solenoid Valve *Series* **VXED21/22/23**

For Water

How to Order

DC **VXED** **21** **3** **0** **-** **02** **-** **5** **G** **1** **-**

Model
Refer to Table (1) shown below for availability.

Orifice diameter
Refer to Table (1) shown below for availability.

Valve/Body configuration
0 N.C. / Single unit

Solenoid valve option
Refer to Table (2) shown below for availability.

Suffix

Nil	—
Z	Oil-free

Port size
Refer to Table (1) shown below for availability.

Rated voltage

5	24 VDC
6	12 VDC

* Refer to Table (3) shown below for availability.

Thread type





Nil	Rc
T	NPTF
F	G
N	NPT

Bracket

Nil	None
B	With bracket

* Removal of bracket is not possible.

Electrical entry

G-Grommet  T -With conduit terminal TL -With conduit terminal and light 	C-Conduit  D -DIN terminal DL -DIN terminal with light DO -For DIN terminal (without connector, with gasket) 
---	---

* Refer to Table (3) for available combinations between electrical option (L) and rated voltage.

Table (1) Model/Orifice Diameter/Port Size
Normally Closed (N.C.)

Solenoid valve model (Port size)				Orifice diameter							Material		
Model		VXED21	VXED22	VXED23	3 (10 mmø)	4 (15 mmø)	5 (20 mmø)	6 (25 mmø)	7 (35 mmø)	8 (40 mmø)	9 (50 mmø)	Body	Seal
Port symbol (Port size)	Thread	02 (1/4)	—	—	●	—	—	—	—	—	—	Brass (C37) Stainless steel	NBR FKM
		03 (3/8)	—	—	●	●	—	—	—	—	—		
		04 (1/2)	—	—	●	●	—	—	—	—	—		
		06 (3/4)	—	—	—	—	●	—	—	—	—		
	Flange	—	10 (1)	—	—	—	—	●	—	—	—	CAC407	
		—	32 (32A)	—	—	—	—	—	●	—	—		
		—	—	40 (40A)	—	—	—	—	—	●	—		
—	—	50 (50A)	—	—	—	—	—	—	—	●			

Table (2) Solenoid Valve Option

Option symbol	Seal material	Body material	Note
Nil	NBR	Brass (C37), CAC407	—
G (Note)		Stainless steel	
L (Note)	FKM	Stainless steel	High corrosive/Oil-free

Note) The G and L options (stainless steel specification) are for port size 1/4 to 1 only.


Table (3) Rated Voltage – Electrical Option

Rated voltage		L (With light)
Voltage symbol	Voltage	
5	24 VDC	●
6	12 VDC	—

For Oil

Model/Valve Specifications

N.C.



⚠ When the fluid is oil.
The dynamic viscosity of the fluid must not exceed 50 mm²/s.



Port size		Orifice diameter (mmø)	Model	Min. operating pressure differential (MPa)	Max. operating pressure differential (MPa)	Flow characteristics		Max. system pressure (MPa)	^(Note) Mass (g)		
						Av x 10 ⁻⁶ m ²	Cv converted				
Thread (Nominal size)	1/4 (8A)	10	VXED2130-02	0.02	0.4	46	1.9	1.5	420		
	3/8 (10A)	10	VXED2130-03			58	2.4		670		
		15	VXED2140-03		0.7	110	4.5		500		
	1/2 (15A)	10	VXED2130-04		0.4	58	2.4		670		
		15	VXED2140-04			130	5.5		1150		
	3/4 (20A)	20	VXED2150-06		230	9.5	1650				
	1 (25A)	25	VXED2260-10		310	13	5400				
Flange	32A	35	VXED2270-32	0.03	0.7	550	23	6800			
	40A	40	VXED2380-40			740	31	8400			
	50A	50	VXED2390-50			1200	49		8400		



Note) Mass of grommet type. Add 10 g for conduit, 30 g for DIN terminal, and 60 g for conduit terminal type respectively.
• Refer to "Glossary of Terms" on page 26 for details on the max. operating pressure differential and the max. system pressure.

Fluid and Ambient Temperature

Fluid temperature (°C)	Ambient temperature (°C)
Solenoid valve option symbol	
A, H	
-5 to 60	-10 to 60

Note) Dynamic viscosity: 50 mm²/s or less

Valve Leakage Rate

Internal Leakage

Seal material	Leakage (Oil)	
	1/4 to 1	32A to 50A
FKM	0.2 cm ³ /min or less	1 cm ³ /min or less

External Leakage

Seal material	Leakage (Oil)	
	1/4 to 1	32A to 50A
FKM	0.1 cm ³ /min or less	0.1 cm ³ /min or less

Pilot Operated 2 Port Solenoid Valve *Series* **VXED21/22/23**

For Oil

How to Order

DC **VXED** **21** **3** **0** **—** **—** **—** **02** **—** **—** **5** **G** **1** **—**

Model
Refer to Table (1) shown below for availability.

Orifice diameter
Refer to Table (1) shown below for availability.

Valve/Body configuration
0 N.C. / Single unit

Solenoid valve option
Refer to Table (2) shown below for availability.

Suffix

Nil	—
Z	Oil-free

Port size
Refer to Table (1) shown below for availability.

Thread type

Nil	Rc
T	NPTF
F	G
N	NPT

Rated voltage

5	24 VDC
6	12 VDC





* Refer to Table (3) shown below for availability.

Bracket

Nil	None
B	With bracket

* Removal of bracket is not possible.

Electrical entry

G -Grommet		C -Conduit	
T -With conduit terminal TL -With conduit terminal and light		D -DIN terminal DL -DIN terminal with light DO -For DIN terminal (without connector, with gasket)	

* Refer to Table (3) for available combinations between electrical option (L) and rated voltage.


Connector


Table (1) Model/Orifice Diameter/Port Size
Normally Closed (N.C.)

Solenoid valve model (Port size)				Orifice diameter							Material		
Model		VXED21	VXED22	VXED23	3 (10 mmø)	4 (15 mmø)	5 (20 mmø)	6 (25 mmø)	7 (35 mmø)	8 (40 mmø)	9 (50 mmø)	Body	Seal
Port symbol (Port size)	Thread	02 (1/4)	—	—	●	—	—	—	—	—	—	Brass (C37) Stainless steel	FKM
		03 (3/8)	—	—	●	●	—	—	—	—	—		
		04 (1/2)	—	—	●	●	—	—	—	—	—		
		06 (3/4)	—	—	—	—	●	—	—	—	—		
	Flange	—	10 (1)	—	—	—	—	●	—	—	—	CAC407	
		—	32 (32A)	—	—	—	—	—	●	—	—		
		—	—	40 (40A)	—	—	—	—	—	●	—		
—	—	50 (50A)	—	—	—	—	—	—	—	●			

Table (2) Solenoid Valve Option

Option symbol	Seal material	Body material
A	FKM	Brass (C37), CAC407
H (Note)		Stainless steel

Note) The H option (stainless steel specification) is for port size 1/4 to 1 only.

Table (3) Rated Voltage – Electrical Option

Rated voltage		L (With light)
Voltage symbol	Voltage	
5	24 VDC	●
6	12 VDC	—

Series VXED21/22/23

For Air/Water/Oil



Construction

Normally closed (N.C.)


Body material: Brass (C37) (32A or more: CAC407), Stainless steel (32A or more: not available)

VXED2130 (8A/10A)

VXED2140/2150/2260
(10A to 25A)

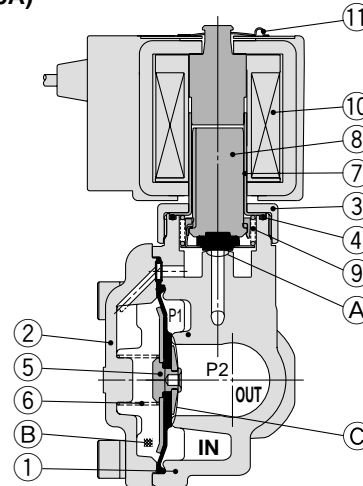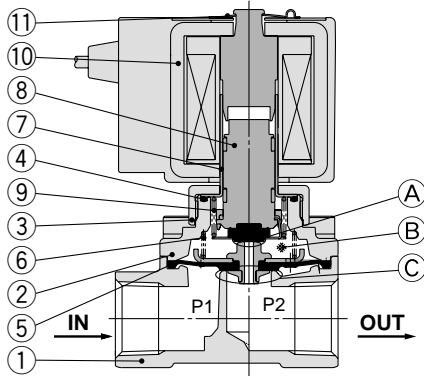

VXED2270/2380/2390 (32A to 50A)

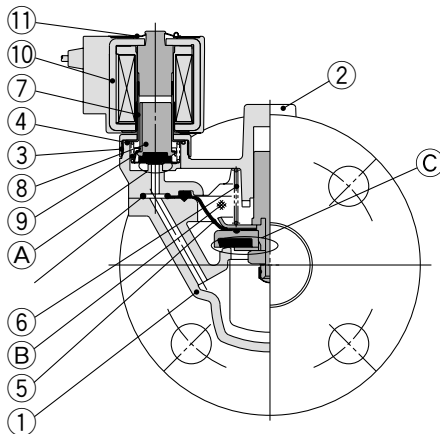

Working principle

<Valve opened>

When the coil ⑩ is energized, the armature assembly ⑧ is attracted into the core of the tube assembly ⑦ and the pilot valve ① opens. Then the pressure in the pressure action chamber ② falls to open the main valve ③.

<Valve closed>

When the coil ⑩ is not energized, the pilot valve ① is closed and the pressure in the pressure action chamber ② rises and the main valve ③ closes.

Component Parts

No.	Description	Size	Material	
			Brass (C37) (CAC407) body specification	Stainless steel body specification
1	Body	8A to 25A	Brass (C37)	Stainless steel
		32A to 50A	CAC407	—
2	Bonnet	8A to 25A	Brass (C37)	Stainless steel
		32A to 50A	CAC407	—
3	Nut	8A to 50A	Brass (C37)	Brass (C37), Ni plated
4	O-ring	8A to 50A	(NBR, FKM, EPDM)	
5	Diaphragm assembly	8A to 25A	(NBR, FKM, EPDM) Stainless steel	
		32A to 50A	(NBR, FKM, EPDM) Stainless steel, Brass (C37)	(NBR, FKM, EPDM) Stainless steel
6	Valve spring	8A to 50A	Stainless steel	
7	Tube assembly	8A to 50A	Stainless steel	
8	Armature assembly	8A to 50A	(NBR, FKM, EPDM) Stainless steel, PPS	
9	Return spring	8A to 50A	Stainless steel	
10	Solenoid coil	8A to 50A	—	
11	Clip	8A to 50A	SK	

The materials in parentheses are seal materials.

Pilot Operated 2 Port Solenoid Valve *Series* **VXED21/22/23**



For Air/Water/Oil

Dimensions: Body Material: Brass (C37), Stainless Steel


VXED2130

Grommet: G


Conduit: C

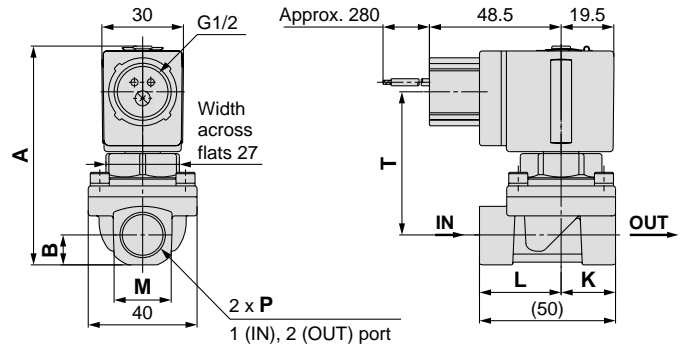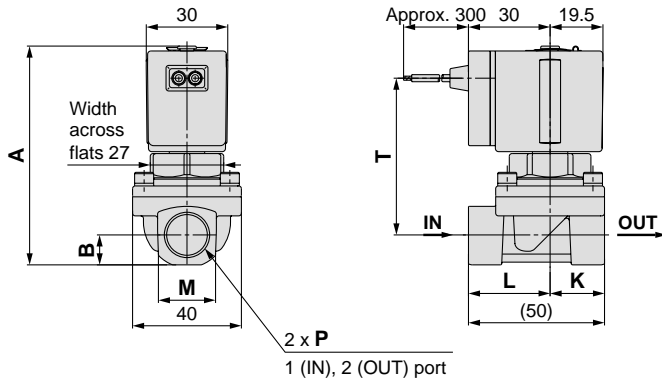



DIN terminal: D

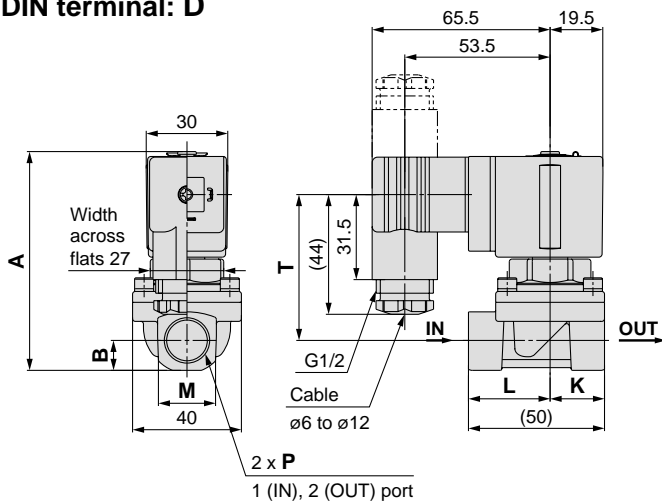

Conduit terminal: T

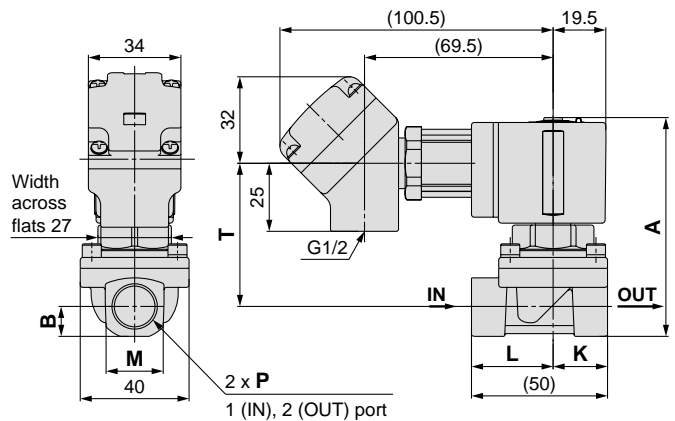

With bracket

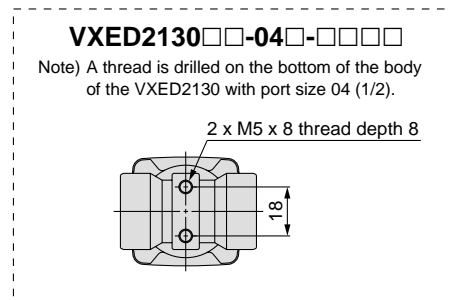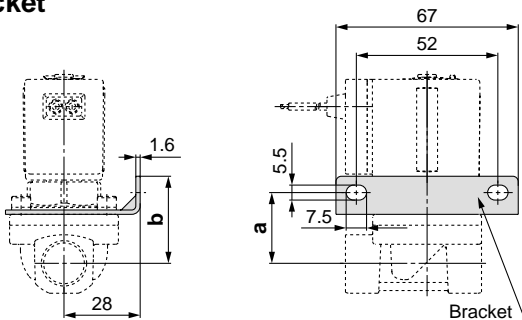

(mm)																		
Model	Port size P	A	B	K	L	M	Electrical entry									Bracket mounting dimension		
							Grommet		Conduit		DIN terminal			Conduit terminal				
N.C.							T	U	T	U	T	U	V	T	U	V	a	b
VXED2130	1/4, 3/8	80.5	11	20	30	22	58	30	53	48.5	54	65.5	53.5	53	100.5	69.5	26	32
	1/2	86	14.5	24	26	28	60	30	55	48.5	56	65.5	53.5	55	100.5	69.5	28	34

(mm)

VX2

VXD

VXZ

VXE

VXP

VXR

VXH

VXF

VX3

VXA

VCH

VDW

VQ

LVM

VCA

VCB

VCL

VCS

VCW


Series VXED21/22/23

For Air/Water/Oil


Dimensions: Body Material: Brass (C37), Stainless Steel

VXED2140/2150/2260


Grommet: G

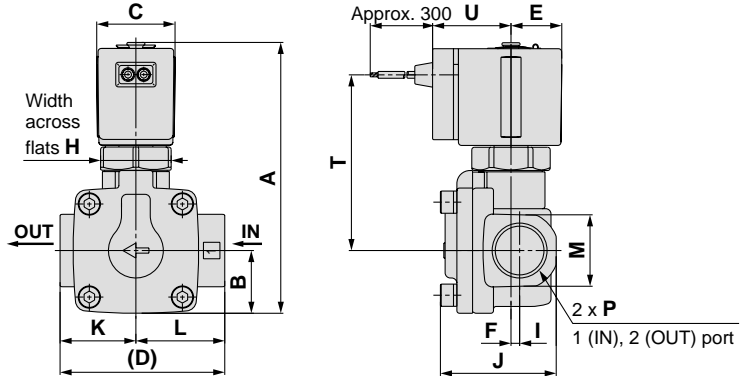


Conduit: C

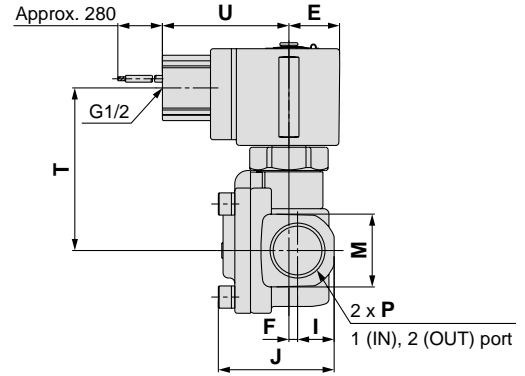


DIN terminal: D

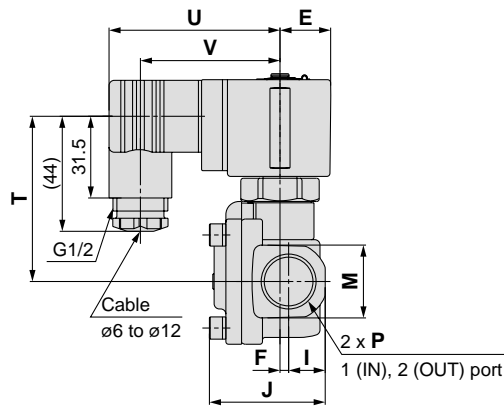

Conduit terminal: T

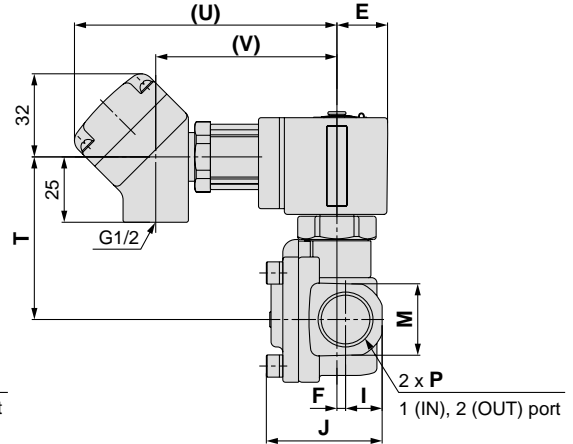

With bracket

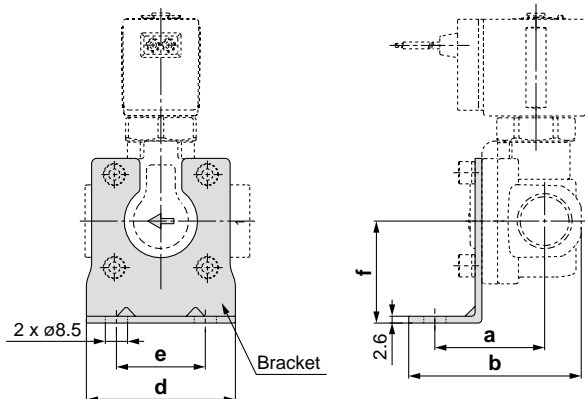


(mm)																												
Model	Port size P	A	B	C	D	E	F	H	I	J	K	L	M	Electrical entry								Bracket mounting dimension						
														Grommet		Conduit		DIN terminal			Conduit terminal							
														T	U	T	U	T	U	V	T	U	V	a	b	d	e	f
N.C.																												
VXED2140	3/8, 1/2	103.5	24	30	63	19.5	3.5	27	14	44.5	29	34	28	67.5	30	62.5	48.5	63.5	65.5	53.5	62.5	100.5	69.5	42	66	57	34	39
VXED2150	3/4	115	29	30	80	19.5	4.5	27	17	51.5	37	43	35	74	30	69	48.5	70	65.5	53.5	69	100.5	69.5	51	78	74	51	45.5
VXED2260	1	133	33	35	90	22.5	4.5	32	20	60	43	47	42	88	33	83	51.5	84	68.5	56.5	83	103.5	72.5	56	86	81	58	49.5


Dimensions: Body Material: Brass (C37), Stainless Steel

VXED2270/2380/2390


Grommet: G

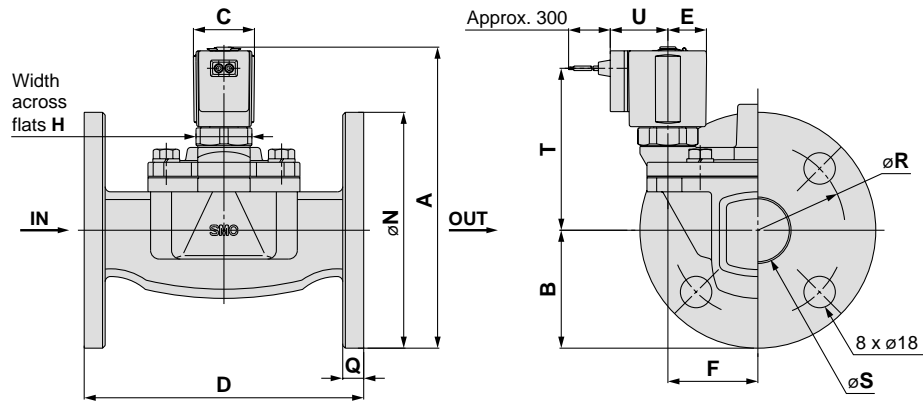


Conduit: C

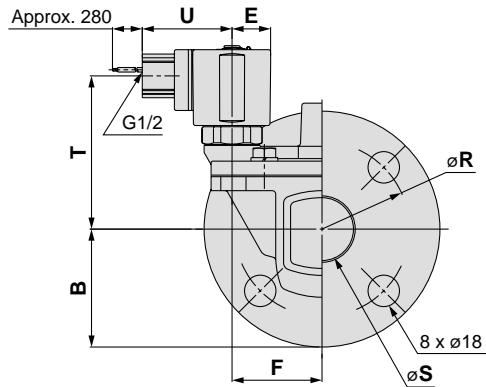

DIN terminal: D

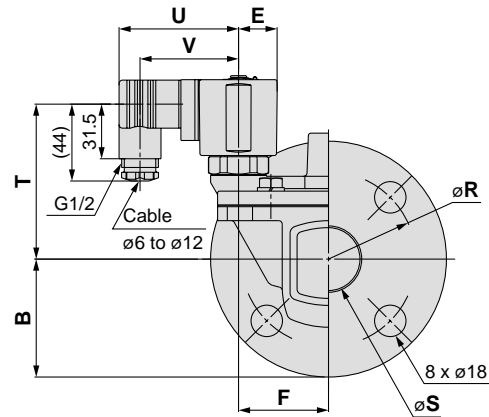

Conduit terminal: T

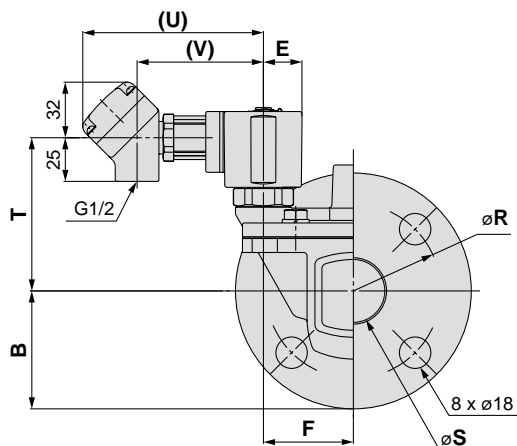

(mm)																						
Model	Applicable flange	A	B	C	D	E	F	H	N	Q	R	S	Electrical entry									
													Grommet		Conduit		DIN terminal			Conduit terminal		
													T	U	T	U	T	U	V	T	U	V
N.C.																						
VXED2270	32A	172.5	67.5	35	160	22.5	51.5	32	135	12	100	36	93	33	88	51.5	89	68.5	56.5	88	103.5	72.5
VXED2380	40A	185	70	40	170	25	54.5	36	140	14	105	42	103	36	98	54	99	71	59	98	106	75
VXED2390	50A	198	77.5	40	180	25	59	36	155	14	120	52	108.5	36	103.5	54	104.5	71	59	103.5	106	75

VX2

VXD

VXZ

VXE

VXP

VXR

VXH

VXF

VX3

VXA

VCH

VDW

VQ

LVM

VCA

VCB

VCL

VCS


VCW

Energy Saving Type

Zero Differential Pressure Type Pilot Operated 2 Port Solenoid Valve

Series *VXEZ22/23*

For Air, Water, Oil



■ Valve

Normally closed (N.C.)

■ Solenoid Coil

Coil: Class B


■ Rated Voltage

24 VDC, 12 VDC

■ Material

Body — Brass (C37), Stainless steel

Seal — NBR, FKM, EPDM

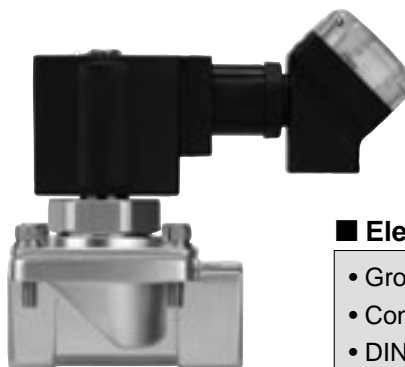

■ Electrical Entry

- Grommet
- Conduit
- DIN terminal
- Conduit terminal

Model		VXEZ2230	VXEZ2240	VXEZ2350	VXEZ2360
Orifice diameter	10 mmø	●	—	—	—
	15 mmø	—	●	—	—
	20 mmø	—	—	●	—
	25 mmø	—	—	—	●
Port size (Nominal size)		1/4 (8A) 3/8 (10A)	1/2 (15A)	3/4 (20A)	1 (25A)

VX2

VXD

VXZ

VXE

VXP

VXR

VXH

VXF

VX3

VXA

VCH□

VDW

VQ

LVM

VCA

VCB

VCL

VCS

VCW

Series VXEZ22/23

Common Specifications

Standard Specifications

Valve specifications	Valve construction	Zero differential pressure type pilot operated 2 port diaphragm type
	Valve type	N.C.
	Withstand pressure	5.0 MPa
	Body material	Brass (C37), Stainless steel
	Seal material	NBR, FKM, EPDM
	Enclosure	Dusttight, Low jetproof (IP65)*
	Environment	Location without corrosive or explosive gases
Coil specifications	Rated voltage	24 VDC, 12 VDC
	Allowable voltage fluctuation	±10% of rated voltage
	Allowable leakage voltage	2% or less of rated voltage
	Coil insulation type	Class B
	Surge voltage suppressor	Built-in surge voltage suppressor

Solenoid Coil Specifications

DC Specification (Class B coil only)

Model	Power consumption (W) (Holding)	Inrush current (A) (Inrush time: 200 ms) ^{Note 1)}		Temperature increase (°C) ^{Note 2)}
		24 VDC	12 VDC	
VXEZ22	2.3	0.29	0.58	25
VXEZ23	3	0.44	0.88	30

Note 1) Energizing time should be 200 ms or longer.

Note 2) Value for ambient temperature at 20°C and when the rated voltage is applied.

Contents

For Air	P.136
For Water	P.138
For Oil	P.140
Construction	P.142
Dimensions	P.143
Replacement Parts	P.144

Applicable Fluid Check List

Energy Saving Type

Zero Differential Pressure Type Pilot Operated 2 Port Solenoid Valve Series VXEZ22/23

All Options



Refer to pages 136, 138, and 140 for specifications and models.

VXEZ2 0 - - 1 -

• Option symbol

Fluid and application	Option symbol	Seal material	Body material
Air	Nil	NBR	Brass (C37)
	G		Stainless steel
Water	Nil	NBR	Brass (C37)
	G		Stainless steel
Oil <small>Note 2)</small>	A	FKM	Brass (C37)
	H		Stainless steel
High corrosive/Oil-free	L <small>Note 1)</small>	FKM	Stainless steel
Copper-free/Fluorine-free <small>Note 3)</small>	J	EPDM	Stainless steel
Other combination	B	EPDM	Brass (C37)

Note 1) The L option is oil-free treatment.

Note 2) The dynamic viscosity of the fluid must not exceed 50 mm²/s or less.

Note 3) The nuts (non-wetted parts) are nickel plated on the C37 material.

* If using for other fluids, please consult with SMC.



VX2

VXD

VXZ

VXE

VXP

VXR

VXH

VXF

VX3

VXA

VCH□

VDW

VQ

LVM

VCA

VCB

VCL

VCS

VCW


For Air

(Inert gas)

Model/Valve Specifications

N.C.

Passage symbol



Normally Closed (N.C.)

Port size (Nominal size)	Orifice diameter (mmø)	Model	Min. operating pressure differential (MPa)	Max. operating pressure differential (MPa)	Flow characteristics			Max. system pressure (MPa)	Mass (g)
					C	b	Cv		
1/4 (8A)	10	VXEZ2230-02	0	0.7	8.5	0.44	2.4	1.5	550
3/8 (10A)		VXEZ2230-03			11.0	0.42	2.8		
1/2 (15A)	15	VXEZ2240-04			23.0	0.34	6.0		760
3/4 (20A)	20	VXEZ2350-06			38.0	0.20	9.5		1300

Port size (Nominal size)	Orifice diameter (mmø)	Model	Min. operating pressure differential (MPa)	Max. operating pressure differential (MPa)	Flow characteristics	Max. system pressure (MPa)	Mass (g)
					Effective area (mm²)		
1 (25A)	25	VXEZ2360-10	0	0.7	215	1.5	1480

* Mass of grommet type. Add 10 g for conduit, 30 g for DIN terminal, and 60 g for conduit terminal type respectively.

• Refer to "Glossary of Terms" on page 26 for details on the max. operating pressure differential and the max. system pressure.

Fluid and Ambient Temperature

Fluid temperature (°C)	Ambient temperature (°C)
Solenoid valve option symbol	
Nil, G	
-10 to 60 ^{Note)}	-10 to 60



Note) Dew point temperature: -10°C or less

Valve Leakage Rate

Internal Leakage

Seal material	Leakage (Air)
NBR	1 cm ³ /min or less

External Leakage

Seal material	Leakage (Air)
NBR	1 cm ³ /min or less

How to Order

DC **VXEZ** **22** **3** **0** **-** **02** **-** **5** **G** **1** **-**

Model
Refer to Table (1) shown below for availability.

Orifice diameter
Refer to Table (1) shown below for availability.

Valve/Body configuration
0 N.C. / Single unit

Solenoid valve option
Refer to Table (2) shown below for availability.

Suffix

Nil	—
Z	Oil-free


Port size
Refer to Table (1) shown below for availability.

Thread type

Nil	Rc
T	NPTF
F	G
N	NPT

Rated voltage

5	24 VDC
6	12 VDC





* Refer to Table (3) shown below for availability.
 Refer to page 144 for ordering coil only.

Bracket

Nil	None
B	With bracket

* Removal of bracket is not possible.

Electrical entry

G-Grommet  T -With conduit terminal TL -With conduit terminal and light 	C-Conduit  D -DIN terminal DL -DIN terminal with light DO -For DIN terminal (without connector, with gasket) 
---	--

* Refer to Table (3) for available combinations between electrical option (L) and rated voltage.

Table (1) Model/Orifice Diameter/Port Size
Normally Closed (N.C.) / Normally Open (N.O.)

Solenoid valve model (Port size)			Orifice symbol (Diameter)			
Model	VXEZ22	VXEZ23	3 (10 mmø)	4 (15 mmø)	5 (20 mmø)	6 (25 mmø)
Port symbol (Port size)	02 (1/4)	—	●	—	—	—
	03 (3/8)	—	●	—	—	—
	04 (1/2)	—	—	●	—	—
	—	06 (3/4)	—	—	●	—
	—	10 (1)	—	—	—	●

Table (2) Solenoid Valve Option

Option symbol	Seal material	Body material	Note
Nil	NBR	Brass (C37)	—
G		Stainless steel	

Table (3) Rated Voltage – Electrical Option

Rated voltage		L (With light)
Voltage symbol	Voltage	
5	24 VDC	●
6	12 VDC	—

VX2

VXD

VXZ

VXE

VXP

VXR

VXH

VXF

VX3

VXA

VCH

VDW

VQ

LVM

VCA

VCB

VCL

VCS


VCW

For Water

Model/Valve Specifications

N.C.

Passage symbol




Normally Closed (N.C.)

Port size (Nominal size)	Orifice diameter (mmø)	Model	Min. operating pressure differential (MPa)	Max. operating pressure differential (MPa)	Flow characteristics		Max. system pressure (MPa)	Mass (g)
					$Av \times 10^{-6} m^2$	Cv converted		
1/4 (8A)	10	VXEZ2230-02	0	0.7	46	1.9	1.5	550
3/8 (10A)		VXEZ2230-03			58	2.4		
1/2 (15A)	15	VXEZ2240-04			130	5.3		760
3/4 (20A)	20	VXEZ2350-06		1.0	220	9.2		1300
1 (25A)	25	VXEZ2360-10			290	12.0		1480

- * Mass of grommet type. Add 10 g for conduit, 30 g for DIN terminal, and 60 g for conduit terminal type respectively.
- Refer to “Glossary of Terms” on page 26 for details on the max. operating pressure differential and the max. system pressure.

Fluid and Ambient Temperature

Fluid temperature (°C)	Ambient temperature (°C)
Solenoid valve option symbol	
Nil, G, L	
1 to 60	–10 to 60

 * With no freezing

Valve Leakage Rate

Internal Leakage

Seal material	Leakage (Water)
NBR, FKM	0.1 cm³/min or less

External Leakage

Seal material	Leakage (Water)
NBR, FKM	0.1 cm³/min or less

How to Order

DC **VXEZ** **22** **3** **0** **—** **—** **—** **—** **—** **—** **02** **—** **—** **—** **5** **G** **1** **—**

Model
Refer to Table (1) shown below for availability.

Orifice diameter
Refer to Table (1) shown below for availability.

Valve/Body configuration
0 N.O. / Single unit

Solenoid valve option
Refer to Table (2) shown below for availability.

Suffix

Nil	—
Z	Oil-free

 Select Nil because the solenoid valve L option is oil-free treatment.

Port size
Refer to Table (1) shown below for availability.

Thread type

Nil	Rc
T	NPTF
F	G
N	NPT

Rated voltage

5	24 VDC
6	12 VDC





 * Refer to Table (3) shown below for availability.

Bracket

Nil	None
B	With bracket

 * Removal of bracket is not possible.

Electrical entry

G-Grommet  T -With conduit terminal TL -With conduit terminal and light 	C-Conduit  D -DIN terminal DL -DIN terminal with light DO -For DIN terminal (without connector, with gasket) 
---	--

* Refer to Table (3) for available combinations between electrical option (L) and rated voltage.

Table (1) Model/Orifice Diameter/Port Size

Normally Closed (N.C.) / Normally Open (N.O.)

Solenoid valve model (Port size)			Orifice symbol (Diameter)			
Model	VXEZ22	VXEZ23	3 (10 mmø)	4 (15 mmø)	5 (20 mmø)	6 (25 mmø)
Port symbol (Port size)	02 (1/4)	—	●	—	—	—
	03 (3/8)	—	●	—	—	—
	04 (1/2)	—	—	●	—	—
	—	06 (3/4)	—	—	●	—
	—	10 (1)	—	—	—	●

Table (2) Solenoid Valve Option

Option symbol	Seal material	Body material	Note
Nil	NBR	Brass (C37)	—
G		Stainless steel	
L	FKM	Stainless steel	High corrosive/Oil-free

Table (3) Rated Voltage – Electrical Option

Rated voltage		L (With light)
Voltage symbol	Voltage	
5	24 VDC	●
6	12 VDC	—

VX2

VXD

VXZ

VXE

VXP

VXR

VXH

VXF

VX3

VXA

VCH□

VDW

VQ

LVM

VCA

VCB

VCL

VCS

VCW


Series VXEZ22/23

For Oil

Model/Valve Specifications

N.C.

Passage symbol



⚠ When the fluid is oil.
The dynamic viscosity of the fluid must not exceed 50 mm²/s.

Normally Closed (N.C.)

Port size (Nominal size)	Orifice diameter (mmø)	Model	Min. operating pressure differential (MPa)	Max. operating pressure differential (MPa)	Flow characteristics		Max. system pressure (MPa)	Mass (g)
					Av x 10 ⁻⁶ m ²	Cv converted		
1/4 (8A)	10	VXEZ2230-02	0	0.7	46	1.9	1.5	550
3/8 (10A)		VXEZ2230-03			58	2.4		
1/2 (15A)	15	VXEZ2240-04			130	5.3		
3/4 (20A)	20	VXEZ2350-06			220	9.2		
1 (25A)	25	VXEZ2360-10			290	12.0		

- * Mass of grommet type. Add 10 g for conduit, 30 g for DIN terminal, and 60 g for conduit terminal type respectively.
- Refer to "Glossary of Terms" on page 26 for details on the max. operating pressure differential and the max. system pressure.

Fluid and Ambient Temperature

Fluid temperature (°C)	Ambient temperature (°C)
Solenoid valve option symbol	
A, H	
-5 to 60	-10 to 60



Note) Dynamic viscosity: 50 mm²/s or less

Valve Leakage Rate

Internal Leakage

Seal material	Leakage (Oil)
FKM	0.1 cm ³ /min or less

External Leakage

Seal material	Leakage (Oil)
FKM	0.1 cm ³ /min or less

How to Order

DC **VXEZ** **22** **3** **0** **-** **02** **-** **5** **G** **1** **-**

Model
Refer to Table (1) shown below for availability.

Orifice diameter
Refer to Table (1) shown below for availability.

Valve/Body configuration
0 N.C. / Single unit

Solenoid valve option
Refer to Table (2) shown below for availability.

Suffix

Nil	—
Z	Oil-free

Port size
Refer to Table (1) shown below for availability.

Thread type

Nil	Rc
T	NPTF
F	G
N	NPT

Rated voltage

5	24 VDC
6	12 VDC





* Refer to Table (3) shown below for availability.
Refer to page 144 for ordering coil only.

Bracket

Nil	None
B	With bracket

* Removal of bracket is not possible.

Electrical entry

G-Grommet  T -With conduit terminal TL -With conduit terminal and light 	C-Conduit  D -DIN terminal DL -DIN terminal with light DO -For DIN terminal (without connector, with gasket) 
---	--

* Refer to Table (3) for available combinations between electrical option (L) and rated voltage.

Table (1) Model/Orifice Diameter/Port Size
Normally Closed (N.C.) / Normally Open (N.O.)

Solenoid valve model (Port size)			Orifice symbol (Diameter)			
Model	VXEZ22	VXEZ23	3 (10 mmø)	4 (15 mmø)	5 (20 mmø)	6 (25 mmø)
Port symbol (Port size)	02 (1/4)	—	●	—	—	—
	03 (3/8)	—	●	—	—	—
	04 (1/2)	—	—	●	—	—
	—	06 (3/4)	—	—	●	—
	—	10 (1)	—	—	—	●

Table (2) Solenoid Valve Option

Option symbol	Seal material	Body material
A	FKM	Brass (C37)
H		Stainless steel

Table (3) Rated Voltage – Electrical Option

Rated voltage		L (With light)
Voltage symbol	Voltage	
5	24 VDC	●
6	12 VDC	—

VX2

VXD

VXZ

VXE

VXP

VXR

VXH

VXF

VX3

VXA

VCH

VDW

VQ

LVM

VCA

VCB

VCL

VCS

VCW


Series VXEZ22/23

For Air/Water/Oil

Construction

Normally closed (N.C.)

Body material: Brass (C37), Stainless steel

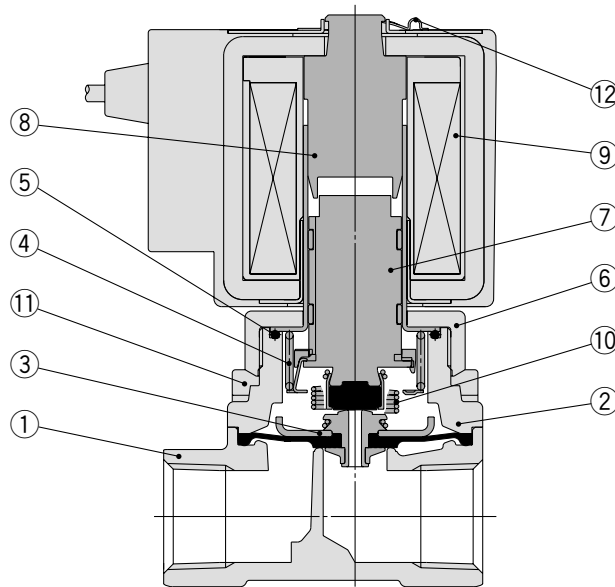

Working principle

<Valve opened – when there is pressure>

When the coil (9) is energized, the armature assembly (7) is attracted into the core of the tube assembly (8) and the pilot valve (A) is opened.

When the pilot valve is opened and the pressure inside the pilot chamber (B) decreases, resulting in the pressure difference from the inlet pressure. Then the diaphragm assembly (3) is lifted and the main valve (C) is opened.

<Valve opened – when there is no pressure or under low minute pressure>

The armature assembly (7) and the diaphragm assembly (3) are connected with each other with the lift spring (10). When the armature assembly is attracted, the diaphragm assembly is pulled up and the main valve (C) is opened.

<Valve closed>

When the coil (9) is de-energized, the armature assembly (7) returns by the reacting force of the return spring (4) and the pilot valve (A) is closed.

When the pilot valve is closed, the pressure inside the pilot chamber (B) increases, resulting that the pressure difference from the inlet pressure is lost and the main valve (C) is closed.

Component Parts


No.	Description	Material	
		Brass (C37) body specification	Stainless steel body specification
1	Body	Brass (C37)	Stainless steel
2	Bonnet	Brass (C37)	Stainless steel
3	Diaphragm assembly	(NBR, FKM, EPDM) Stainless steel	
4	Return spring	Stainless steel	
5	O-ring	(NBR, FKM, EPDM)	
6	Nut	Brass (C37)	Brass (C37), Ni plated
7	Armature assembly	(NBR, FKM, EPDM) Stainless steel, PPS	
8	Tube assembly	Stainless steel	
9	Solenoid coil	—	
10	Lift spring	Stainless steel	
11	Hexagon socket bolt	Stainless steel	
12	Clip	SK	

The materials in parentheses are seal materials.


Dimensions: Body Material: Brass (C37), Stainless Steel

VXEZ22□0/23□0


Grommet: G

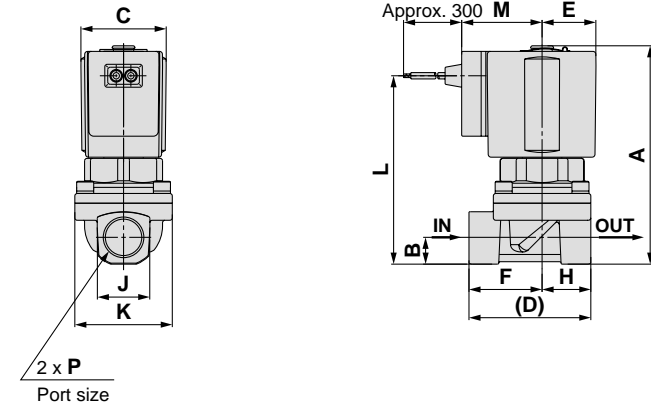


Conduit: C

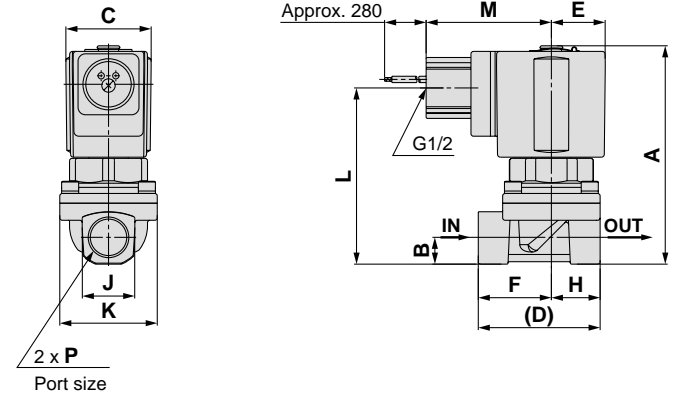


DIN terminal: D

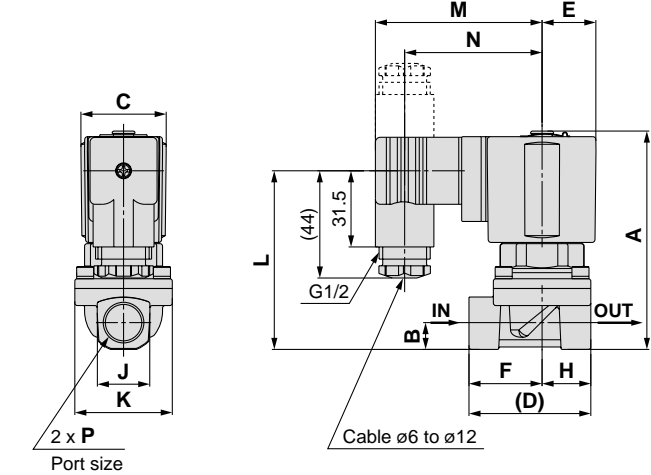

Conduit terminal: T

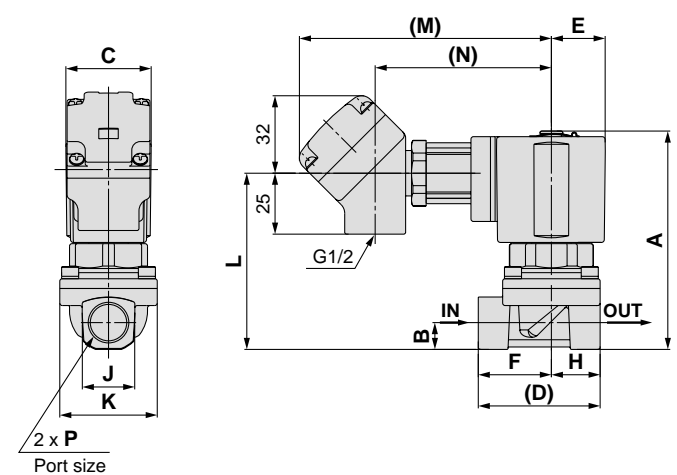

With bracket

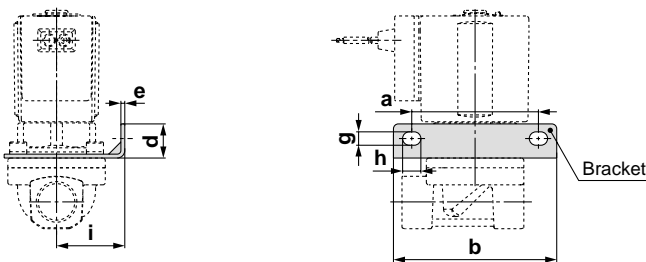

(mm)

Model	Port size P	A	B	C	D	E	F	H	J	K
N.C.										
VXEZ2230	1/4, 3/8	89	11	35	50	22.5	30	20	22	40
VXEZ2240	1/2	97	14	35	63	22.5	37	26	29.5	52
VXEZ2350	3/4	111	18	40	80	25	47.5	32.5	36	65
VXEZ2360	1/1	118.5	21	40	90	25	55	35	40.5	70

(mm)

Model	Port size P	a	b	d	e	f	g	h	i	Electrical entry										
										Grommet		Conduit		DIN terminal			Conduit terminal			
										L	M	L	M	L	M	N	L	M	N	
N.C.																				
VXEZ2230	1/4, 3/8	52	67	14	1.6	26	5.5	7.5	28	77	33	72	51.5	73	68.5	56.5	72	103.5	72.5	
VXEZ2240	1/2	60	75	17	2.3	33	6.5	8.5	35	84.5	33	80	51.5	81	68.5	56.5	80	103.5	72.5	
VXEZ2350	3/4	68	87	22	2.6	40	6.5	9	43	99.5	36	94.5	54	95.5	71	59	94.5	106	75	
VXEZ2360	1/1	73	92	22	2.6	45.5	6.5	9	45	107	36	102	54	103	71	59	102	106	75	

Series VXE□21/22/23

For Air/Water/Oil

Replacement Parts

● Solenoid coil assembly part no.

VXE02 **1** N-**1** G E-□

Series	
1	VXE□21
2	VXE□22□□
3	VXE□23□□

● Valve





Symbol	Model
Z	VXED2130
Nil	Others

Rated voltage Note)

5	24 VDC
6	12 VDC

Note) Refer to Table (1) for available combinations.

Electrical entry


G-Grommet 	C-Conduit 
T -With conduit terminal TL -With conduit terminal and light 	D -DIN terminal DL -DIN terminal with light DO -For DIN terminal (without connector, with gasket) 

* Refer to Table (1) for available combinations between electrical option and rated voltage.

● DIN connector part no.

Without electrical option **GDM2A**

With electrical option **GDM2A-□□**



Electrical option

L With light

* Refer to Table (1) for available combinations between electrical option (L) and rated voltage.

Rated voltage

5	24 VDC
6	12 VDC

● Clip part no.

For VXE□21: **VX021N-10**

For VXE□22: **VX022N-10**

For VXE□23: **VX023N-10**

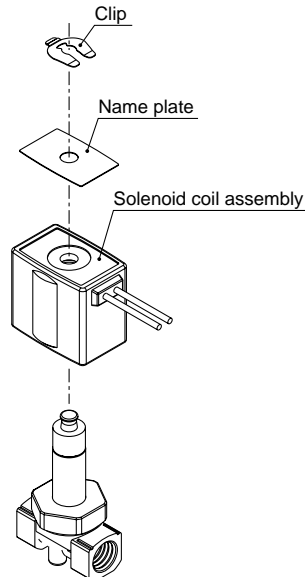


Table (1) Rated Voltage – Electrical Option

Rated voltage		L (With light)
Voltage symbol	Voltage	
5	24 VDC	●
6	12 VDC	—

● Gasket part no. for DIN connector **VCW20-1-29-1**

● Name plate part no.

AZ-T **Valve model**

↑ Enter by referring to "How to Order" (Single Unit).