

# Fine Lock Cylinders/Lock-up Cylinder

## Series CL





ø16, ø20, ø25, ø32, ø40, ø50, ø63, ø80, ø100, ø125, ø140, ø160

Locking method	Spring locking	Pneumatic locking	Spring and pneumatic locking
Features	<ul style="list-style-type: none"> <li>Unlocking: Discharging the air causes the lock to operate.</li> </ul>	<ul style="list-style-type: none"> <li>Pressure locking: The holding power can be varied according to the air pressure that is applied to the port.</li> </ul>	<ul style="list-style-type: none"> <li>Pressure locking: The holding power can be varied according to the air pressure that is applied to the port.</li> <li>Unlocking: Discharging the air causes the lock to operate.</li> </ul>

(Lock-up cylinders are spring locking only.)

**Locking in both directions is possible.**  
Locking in either side of cylinder stroke is possible, too.  
(The lock-up cylinder can be locked only in one direction.)

### Series Variations

Series	Action	Rod	Standard variations		Locking direction	Locking method			Bore size (mm)	Standard stroke (mm)	Page
			Auto switch built-in magnet	With rod boot		Spring locking	Pneumatic locking	Spring and Pneumatic locking			
<b>Fine lock cylinders</b> <b>Series CLJ2</b> 	Double acting	Single rod	●	●	Both directions	●	●	●	16	15 to 200	601
<b>Series CLM2</b> 	Double acting	Single rod	●	●	Both directions	●	●	●	20 25 32 40	25 to 300	611
<b>Series CLG1</b> 	Double acting	Single rod	●	●	Both directions	●	●	●	20 25 32 40	25 to 300	625
<b>Lock-up cylinder</b> <b>Series CL1</b> 	Double acting	Single rod	●	●	One direction	●			40 50, 63 80, 100 125, 140 160	25 to 500 25 to 600 25 to 700 Up to 1000 Up to 1200	636

CLJ2

CLM2

CLG1

CL1

MLGC

CNG

MNB

CNA

CNS

CLS

CLQ

RLQ

MLU

MLGP

ML1C

D-□

-X□

Individual  
-X□



## Series CL

# Specific Product Precautions 1

Be sure to read before handling.

The precautions on these pages are for the fine lock cylinders and the lock-up cylinders.  
For general actuator precautions, refer to Actuator Precautions on pages 3 to 7.

### Design of Equipment and Machinery

#### Warning

- Construct so that the human body will not come into direct contact with driven objects or the moving parts of locking cylinders. If there is a risk of contact, provide safety measures such as a cover or a system that uses sensors that will activate an emergency stop before contact is made.
- Use a balance circuit in which lurching of the piston is taken into consideration. If the lock is applied at a desired position of a stroke and compressed air is applied to only one side of the cylinder, the piston will lurch at a high speed the moment the lock is disengaged. In such a situation, there is a risk of injury to humans, or equipment damage. To prevent the piston from lurching, use a balance circuit such as the recommended pneumatic circuit (P. 598). If an air-hydro fine lock cylinder is used, make sure to operate the lock portion through air pressure. Never use oil on the lock-up cylinder because the lock-up cylinder is a non-lube style. Failure to observe this could cause the lock to malfunction.

### Selection

#### Warning

Refer to the following criteria for the maximum load in the locked state, and set.

When a cylinder is in a no-load and locked state, the holding force (maximum static load) is the lock's ability to hold a static load that does not involve vibrations or shocks. To ensure braking force, the maximum load must be set as described below.

- For constant static loads, such as for drop prevention:
  - Fine lock series (Series CLJ2/CLM2/CLG1)  
35% or less of the holding force (maximum static load)  
Note) For applications such as drop prevention, consider situations in which the air source is shut off, and make selections based on the holding force of the spring locked state. Do not use the pneumatic lock for drop prevention purposes.
  - Lock-up series (Series CL1)  
50% or less of the holding force (maximum static load)

- When kinetic energy acts upon the cylinder, such as when effecting an intermediate stop, there are constraints in terms of the allowable kinetic energy that can be applied to the cylinder in a locked state. Therefore, refer to the allowable kinetic energy of the respective series. Furthermore, during locking, the mechanism must sustain the thrust of the cylinder itself, in addition to absorbing the kinetic energy. Therefore, even within a given allowable kinetic energy level, there is an upper limit to the amount of the load that can be sustained.
  - Fine lock series (Series CLJ2/CLM2/CLG1)  
Maximum load at horizontal mounting: 70% or less of the holding force (Maximum static load) for spring lock  
Maximum load at vertical mounting: 35% or less of the holding force (Maximum static load) for spring lock
  - Lock-up series (Series CL1)  
Maximum load at horizontal mounting: 50% or less of the holding force (Maximum static load)  
Maximum load at vertical mounting: 25% or less of the holding force (Maximum static load)

- In a locked state, do not apply impacts, strong vibrations or rotational forces. Do not apply a impacts, strong vibrations or rotational forces from external sources, because this could damage or shorten the life of the lock unit.


- The locking of the fine lock cylinder is directional. Although the fine lock cylinder can be locked in both directions, be aware that its holding force is smaller in one of the directions. CLJ2/CLM2/CLG1.... Holding force at piston rod extended side decreases approx. 15%.

- The locking of the lock-up cylinder is unidirectional. Because the locking direction of the lock-up cylinder is unidirectional, select the locking direction in accordance with the particular operating conditions. It is also possible to manufacture a bidirectional lock-up cylinder. For details, refer to "Made to Order" on page 1989. Due to the nature of its construction, a lock-up cylinder has a play of approximately 0.5 mm to 1 mm in the axial direction. Therefore, if an external stopper is used to stop the piston rod and the lock is engaged, the piston rod will shift in the amount of its axial play.

- To effect an intermediate stop, take the cylinder's stopping precision and overrun amount into consideration. Because the lock is applied by mechanical means, the piston will not stop immediately in response to a stopping signal, but only after a time lag. This lag determines the amount of the overrun of the piston stroke. Thus, the range of the maximum and minimum amounts of the overrun is the stopping precision.

- Place the limit switch before the desired stopping position, only in the amount of the overrun.
- The limit switch must have a detection length (dog length) of the overrun amount +  $\alpha$ .
- For SMC's auto switches, the operating range are between 8 and 14 mm. (It varies depending on a switch model.) When the overrun amount exceeds this range, self-holding of the contact should be performed at the switch load side.

\* For stopping accuracy, refer to Series CLJ (P. 603), Series CLM2 (P. 614), Series CLG1 (P. 627), and Series CL1 (P. 637) respectively.

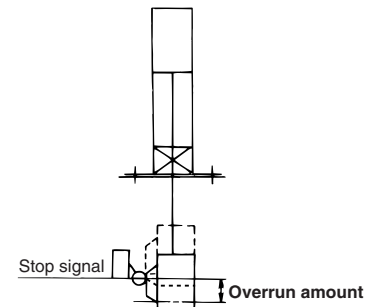

- In order to further improve stopping accuracy, the time from the stop signal to the operation of the lock should be shortened as much as possible. To accomplish this, use a device such as a highly responsive electric control circuit or solenoid valve driven by direct current, and place the solenoid valve as close as possible to the cylinder.
- Be aware that the stopping accuracy is influenced by changes in the piston speed. The variance in the stopping position increases if the piston speed changes, such as due to load fluctuations during the reciprocal movement of the piston. Therefore, take measures to ensure a constant piston speed immediately preceding the stopping position. Furthermore, the variances in the stopping position increases when the piston is effecting a cushioning stroke or during acceleration after starting its movement.
- When unlocking is performed, if the thrust is applied to the piston, unlocking will not be easily done. To avoid that, ensure that unlocking should be performed before the thrust is applied to the piston.



# Series CL Specific Product Precautions 2

Be sure to read before handling.

The precautions on these pages are for the fine lock cylinders and the lock-up cylinders.  
For general actuator precautions, refer to Actuator Precautions on pages 3 to 7.


## Mounting

### ⚠ Warning


- Be certain to connect the rod end to the load with the lock released.
  - If this is performed with the lock engaged, a load that exceeds the allowable rotational force or holding force would be applied to the piston rod, which could damage the locking mechanism. The fine lock and Series CL1 with  $\phi 40$  to  $\phi 100$  cylinders have a built-in manual unlocking mechanism. Therefore, they can be maintained in the unlocked state without supplying air. For Series CL1 with  $\phi 125$  to  $\phi 160$  cylinders, simply connect piping to the lock-up port, and supply air pressure of 0.2 MPa or more to disengage the lock in order to attach a load.

### ⚠ Caution

- Do not apply offset loads on the piston rod.
  - Pay particular attention to aligning the center of gravity of the load with the axial center of the cylinder. If there is a large amount of deviation, the piston rod could become unevenly worn or damaged due to the inertial moment that is created when the piston rod is stopped by the lock.



X Load center of gravity and cylinder shaft center are not matched.



○ Load center of gravity and cylinder shaft center are matched.

Note) Can be used if all of the generated moment is absorbed by an effective guide.

## Adjustment

### ⚠ Caution

- Place it in the locked position. (Excluding the series CL1  $\phi 125$  to  $\phi 160$ .)
  - The locks are manually disengaged at the time the cylinders are shipped from the factory. Therefore, make sure to change them to the locked state before using the cylinders. For procedures to effect the change, refer to page 599 for the fine lock series. Be aware that the lock will not operate properly if the change is not performed correctly.
  - Adjust the cylinder's air balance. In the state in which a load is attached to the cylinder, disengage the lock and adjust the air pressure at the rod side and the head side of the cylinder to obtain a load balance. By maintaining a proper air balance, the piston rod can be prevented from lurching when the lock is disengaged.
- Adjust the mounting position of detections such as those of the auto switches. To effect an intermediate stop, adjust the mounting position of the auto switch detection by taking the amount of overrun into consideration in relation to the desired stopping position.

CLJ2

CLM2

CLG1

CL1

MLGC

CNG

MNB

CNA

CNS

CLS

CLQ

RLQ

MLU

MLGP

ML1C

D-□

-X□

Individual  
-X□



# Series CL Specific Product Precautions 3

Be sure to read before handling.

The precautions on these pages are for the fine lock cylinders and the lock-up cylinders.  
For general actuator precautions, refer to Actuator Precautions on pages 3 to 7.

## Pneumatic Circuit

### Warning

1. Be certain to use a pneumatic circuit which will apply balancing pressure to both sides of the piston when in a locked stop.

In order to prevent cylinder lurching after a lock stop, when restarting or when manually unlocking, a circuit should be used to which will apply balancing pressure to both sides of the piston, thereby canceling the force generated by the load in the direction of piston movement.

2. Use a solenoid valve for unlocking which has a large effective area, as a rule 50% or more of the effective area of the cylinder drive solenoid valve.

The larger the effective area is, the shorter the locking time will be (the overrun amount will be shorter), and stopping accuracy will be improved.

3. Place the solenoid valve for unlocking close to the cylinder, and no farther than the cylinder drive solenoid valve.

The shorter the distance from the cylinder (the shorter the piping), the shorter the overrun amount will be, and stopping accuracy will be improved.

4. Allow at least 0.5 seconds from a locked stop (intermediate stop of the cylinder) until release of the lock.


When the locked stop time is too short, the piston rod (and load) may lurch at a speed greater than the control speed of the speed controller.

5. When restarting, control the switching signal for the unlocking solenoid valve so that it acts before or at the same time as the cylinder drive solenoid valve.


If the signal is delayed, the piston rod (and load) may lurch at a speed greater than the control speed of the speed controller.

### 6. Basic circuit

#### 1) [Horizontal]

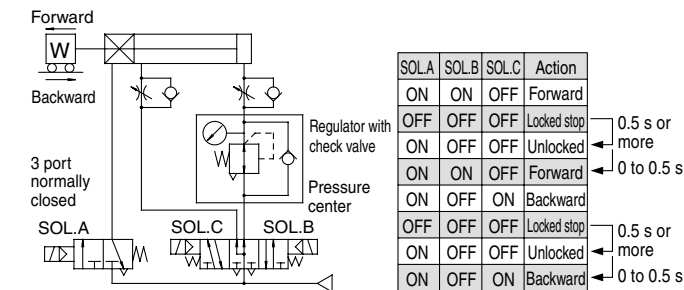


#### 2) [Vertical]

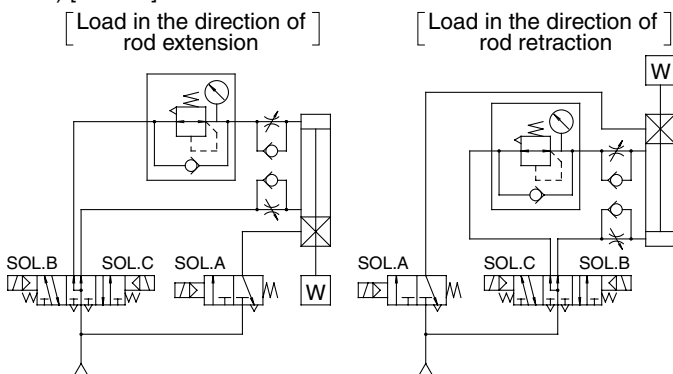


### Caution

1. A 3 position pressure center solenoid valve and regulator with check valve can be replaced with two 3 port normally open valves and a regulator with relief function.

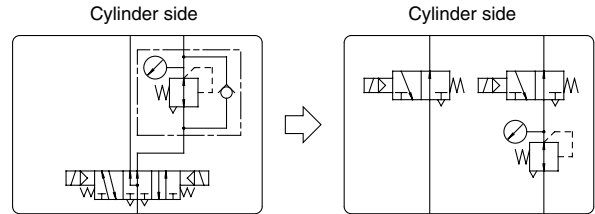

[Example]


#### 1) [Horizontal]

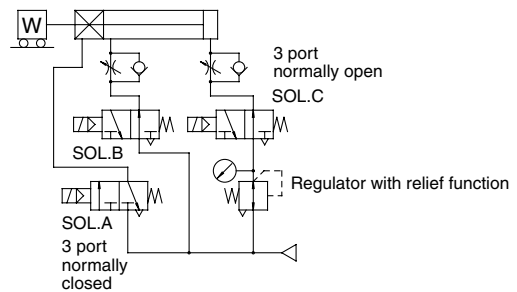

#### 2) [Vertical]

[Load in the direction of rod extension]

[Load in the direction of rod retraction]

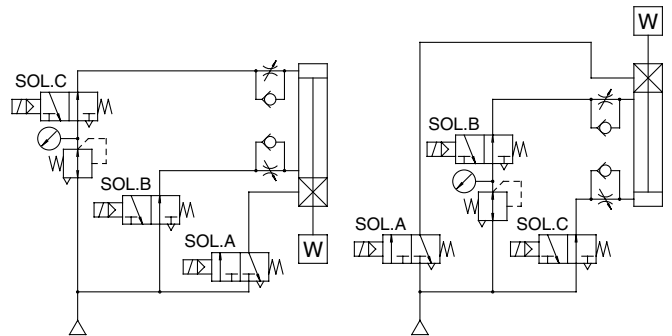





# Series CL Specific Product Precautions 4

Be sure to read before handling.

The precautions on these pages are for the fine lock cylinders and the lock-up cylinders.  
For general actuator precautions, refer to Actuator Precautions on pages 3 to 7.


## How to Manually Disengage the Lock and Change from the Unlocked to the Locked State

The lock is manually disengaged at the time the cylinder is shipped from the factory. Because the lock will not operate in this state, make sure to change it to the locked state before operation, after having adjusted the axial center for installation.

### How to Change from Unlocked to Locked State

#### 1. Series CLJ2, CLM2, CLG1

- 1) Loose locking nut.
  - 2) Turn the wrench flats section of the manual unlocking cam to the LOCK position that is marked on the cam guide.
  - 3) While keeping the wrench flats section in place, tighten the lock nut.
- Note) The manual unlocking cam will rotate approximately 180°. Do not rotate the wrench flats section excessively.

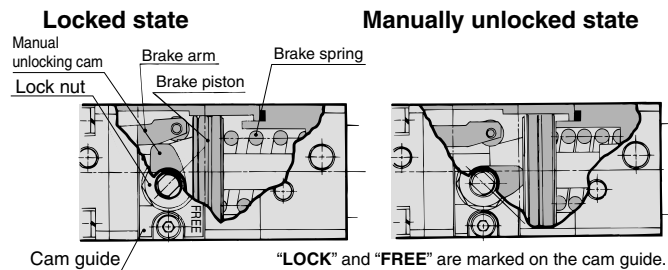

### Manually Unlocking

The lock of a fine lock series cylinder can be disengaged manually through the procedure described below. However, make sure to disengage the lock pneumatically before operating the cylinder.

Note) Manual disengagement of the lock could create a greater cylinder sliding resistance than pneumatic disengagement of the lock.

#### 1. Series CLJ2, CLM2, CLG1

- 1) Loose locking nut.
- 2) Supply air pressure of 0.3 MPa or more to the lock release port.
- 3) Turn the wrench flats section of the manual unlocking cam until it stops at the FREE position that is marked on the cam guide.
- 4) While keeping the wrench flats section in place, tighten the lock nut.

CLJ2

CLM2

CLG1

CL1

MLGC

CNG

MNB

CNA

CNS

CLS

CLQ

RLQ

MLU

MLGP

ML1C

D-□


-X□

Individual  
-X□

# Prior to Use

## Construction Principle/Applicable Series: CLJ2, CLM2, CLG1, MLGC


### Spring locking type

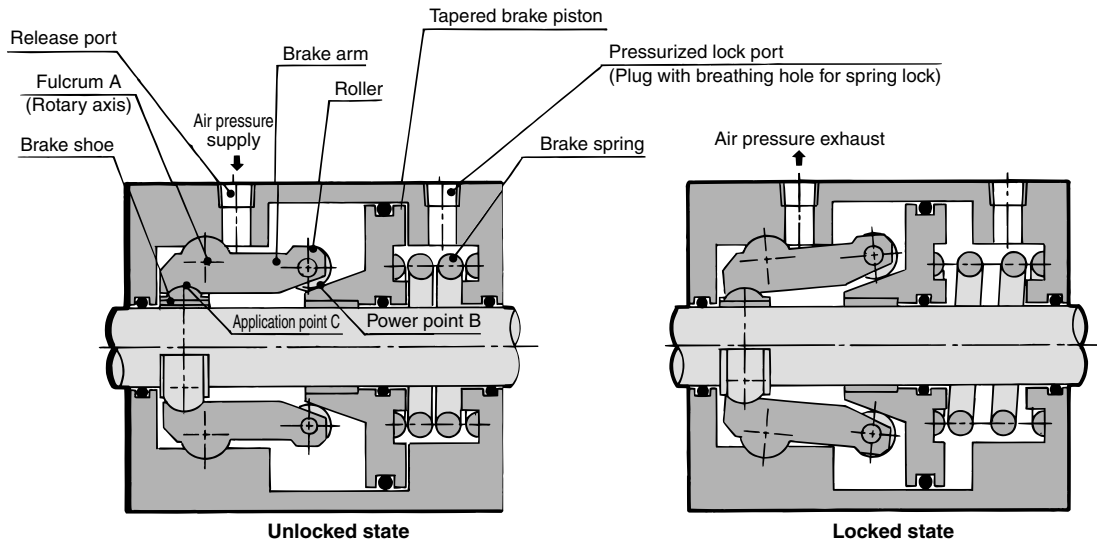

#### Spring locking (Exhaust locking)


The spring force that is applied to the tapered brake piston becomes amplified through the wedge effect. This force becomes further amplified to the power of  $AB/AC$  through the mechanical advantage of a lever and acts on the brake shoe, which in turn, applies a large force to tighten and lock the piston rod. To disengage the lock, air pressure is supplied through the unlocking port, thus disengaging the brake spring force.

### Pneumatic locking type

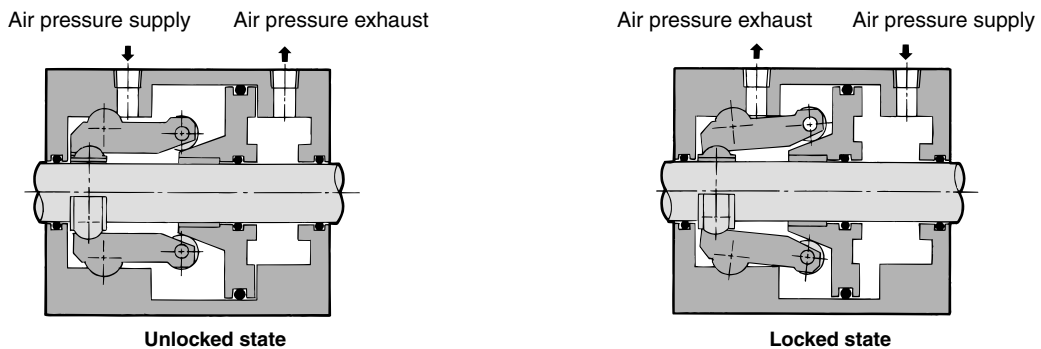

Brake piston is operated by air pressure.

### Spring and pneumatic locking type

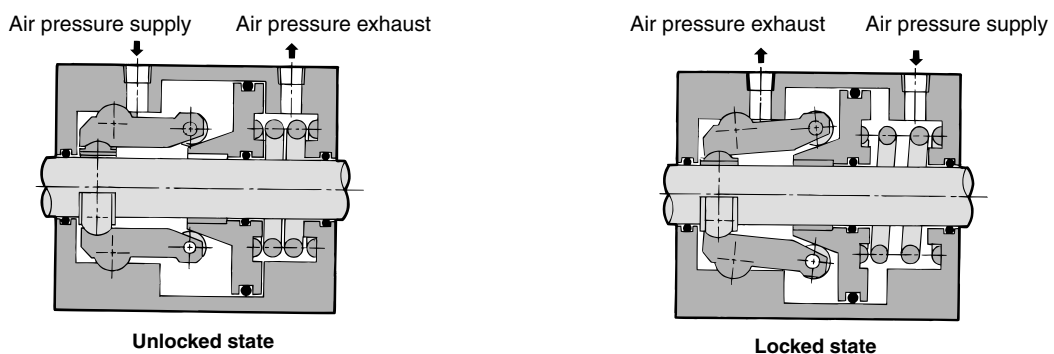

Brake piston is operated by air pressure and spring force.

# Fine Lock Cylinder Double Acting, Single Rod Series **CLJ2** ø16

## How to Order

**CLJ2 L 16 - 60 R - E - [ ]**

**With auto switch** **CDLJ2 L 16 - 60 R - E - M9BW [ ] - [ ]**

**With auto switch**  
(Built-in magnet)

**Mounting style**

<b>B</b>	Basic style
<b>L</b>	Axial foot style
<b>F</b>	Rod side flange style
<b>D</b>	Double clevis style

**Bore size**  
16 16 mm

**Standard stroke (mm)**  
ø16 15, 30, 45, 60, 75, 100, 125, 150, 175, 200

**Port location on head cover**

<b>Nil</b>	Perpendicular to axis
<b>R</b>	Axial direction

**Number of auto switches**

<b>Nil</b>	2 pcs.
<b>S</b>	1 pc.
<b>n</b>	"n" pcs.

**Auto switch**

<b>Nil</b>	Without auto switch
------------	---------------------

\* For the applicable auto switch model, refer to the table below.

**Lock operation**

<b>E</b>	Spring locking (Exhaust locking)
<b>P</b>	Pneumatic locking (Pressure locking)
<b>D</b>	Spring and pneumatic locking

**Made to Order**  
Refer to page 602 for details.

### Built-in Magnet Cylinder Model

If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch.  
(Example) CDLJ2B16-45-P

### Applicable Auto Switch/Refer to pages 1719 to 1827 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model	Lead wire length (m)					Pre-wired connector	Applicable load		
					DC	AC		0.5 (Nil)	1 (M)	3 (L)	5 (Z)	None (N)				
Solid state switch	—	Grommet	Yes	3-wire (NPN)	5 V, 12 V	—	<b>M9N</b>	●	●	●	○	—	○	IC circuit		
				3-wire (PNP)			<b>M9P</b>	●	●	●	○	—	○			
		Connector	2-wire	12 V	<b>M9B</b>	●	●	●	○	—	○	—				
	Diagnostic indication (2-color indication)	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	<b>M9NW</b>	●	●	●	○	—	○	IC circuit	
				3-wire (PNP)				<b>M9PW</b>	●	●	●	○	—	○		
				2-wire				<b>M9BW</b>	●	●	●	○	—	○		
				4-wire (NPN)				<b>H7NF</b>	●	—	●	○	—	○		IC circuit
Water resistant (2-color indication)	Grommet	No	2-wire	12 V	—	<b>H7BA</b>	—	—	●	○	—	○	—			
With diagnostic output (2-color indication)			Connector			2-wire	24 V	12 V	100 V or less	<b>A96</b>	●	—	●	—	—	—
Reed switch	—	Grommet	Yes	3-wire (NPN equivalent)	24 V	12 V	—	<b>A93</b>	●	—	●	—	—	—	—	
				2-wire				<b>A90</b>	●	—	●	—	—	—	—	—
		Connector	No	2-wire	24 V	12 V	24 V or less	<b>C73C</b>	●	—	●	●	—	—	—	—
								<b>C80C</b>	●	—	●	●	●	—	—	—

\* Lead wire length symbols: 0.5 m ..... Nil (Example) M9NW  
1 m ..... M (Example) M9NWM  
3 m ..... L (Example) M9NWL  
5 m ..... Z (Example) M9NWZ  
None ..... N (Example) H7CN

\* Since there are other applicable auto switches than listed, refer to page 610 for details.  
\* For details about auto switches with pre-wired connector, refer to pages 1784 and 1785.  
\* D-A9□V□/M9□V□/M9□WV□/D-M9□A(V)L types cannot be mounted.

\* Solid state auto switches marked with "○" are produced upon receipt of order.  
\* D-A9□/M9□/M9□W auto switches are shipped together (not assembled). (Only auto switch mounting brackets are assembled at the time of shipment.)  
\* D-C7□□/C80□/H7□□ auto switches are assembled at the time of shipment.

CLJ2

CLM2

CLG1

CL1

MLGC

CNG

MNB

CNA

CNS

CLS

CLQ

RLQ

MLU

MLGP

ML1C

D-□

-X□

Individual  
-X□

# Series CLJ2


**Provided with a compact lock mechanism, it is suitable for intermediate stop, emergency stop, and drop prevention.**

## Locking in both directions

The piston rod can be locked in either direction of its cylinder stroke.


## Maximum piston speed: 500 mm/s

It can be used at 50 to 500 mm/s provided that it is within the allowable kinetic energy range.

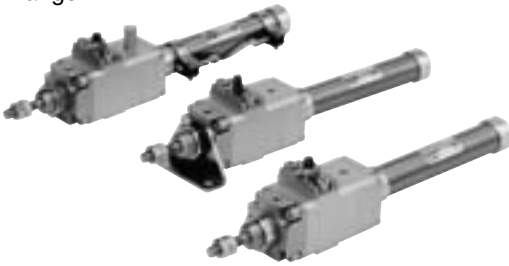

## Head Cover Port Location

Either perpendicular to the cylinder axis or in-line with the cylinder axis is available for basic style.



Axial

Perpendicular



**Made to Order Specifications**  
(For details, refer to page 1836.)

Symbol	Specifications
-XA□	Change of rod end shape

Refer to pages 608 to 610 for cylinders with auto switches.

- Minimum auto switch mounting stroke
- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range
- Switch mounting bracket: Part no.

## Specifications

Bore size (mm)	<b>16</b>
Action	Double acting, Single rod
Lubricant	Not required (Non-lube)
Lock operation	Spring locking (Exhaust locking) Pneumatic locking (Pressure locking) Spring and pneumatic locking
Fluid	Air
Proof pressure	1.05 MPa
Maximum operating pressure	0.7 MPa
Minimum operating pressure	0.08 MPa
Ambient and fluid temperature	Without auto switch: -10 to 70°C (No freezing) With auto switch: -10 to 60°C (No freezing)
Piston speed	50 to 500 mm/s *
Cushion	Rubber bumper
Stroke length tolerance	+1.0 0
Mounting	Basic style, Axial foot style, Rod side flange style, Double clevis style



\* Constraints associated with the allowable kinetic energy are imposed on the speeds at which the piston can be locked.  
The maximum speed of 750 mm/s can be accommodated if the piston is to be locked in the stationary state for the purpose of drop prevention.

## Fine Lock Specifications

Lock operation	Spring locking (Exhaust locking)	Spring and pneumatic locking	Pneumatic locking (Pressure locking)
Fluid	Air		
Maximum operating pressure	0.5 MPa		
Unlocking pressure	0.3 MPa or more		0.1 MPa or more
Lock starting pressure	0.25 MPa or less		0.05 MPa or more
Locking direction	Both directions		

Refer to the minimum auto switch mounting stroke (page 609) for those with an auto switch. (mm)

Bore size (mm)	Standard stroke
<b>16</b>	15, 30, 45, 60, 75, 100, 125, 150, 175, 200

\* Manufacture of intermediate strokes at 1 mm intervals is possible. (Spacers are not used.)

## Mounting Bracket and Accessory/For details, refer to page 607.

Mounting		Basic style	Axial foot style	Rod side flange style	Double clevis style
Standard equipment	Mounting nut	●	●	●	—
	Rod end nut	●	●	●	●
	Clevis pin	—	—	—	●
Option	Single knuckle joint	●	●	●	●
	Double knuckle joint (With pin) *	●	●	●	●
	T-bracket	—	—	—	●

\* Pins and retaining rings are packaged together with double clevis and double knuckle joint.

## Mounting Bracket Part No.

Mounting bracket	Part no.
Foot	CLJ-L016B
Flange	CLJ-F016B
T-bracket *	CJ-T016B

\* T-bracket is used with double clevis (D).

# Fine Lock Cylinder Double Acting, Single Rod **Series CLJ2**

## Mass

Bore size (mm)		16
Standard mass *		320
Additional mass per each 15 mm of stroke		6.5
Mounting bracket mass	Axial foot style	27
	Rod side flange style	21
	Double clevis style (With pin) **	10

\* Mounting nut and rod end nut are included in the basic mass.

\*\* Mounting nut is not included in double clevis style.

Calculation: (Example) **CLJ2L16-60**

- Basic mass.....320 (ø16)
- Additional mass.....6.5/15 stroke
- Cylinder stroke.....60 stroke

$$320 + 6.5/15 \times 60 + 27 = 373 \text{ g}$$

## Stopping Accuracy (Not including tolerance of control system.) (mm)

Lock type	Piston speed (mm/s)			
	50	100	300	500
Spring locking (Exhaust locking)	± 0.4	± 0.5	± 1.0	± 2.0
Pneumatic locking (Pressure locking) Spring and pneumatic locking	± 0.2	± 0.3	± 0.5	± 1.5

Condition: Load: 2 kg

Solenoid valve: Lock port mounting

## Caution

Recommended Pneumatic Circuit/Caution on Handling

For detailed specifications of the fine lock cylinder, Series CLJ2 mentioned above, refer to pages 596 to 599.

## Caution/Allowable Kinetic Energy when Locking

Bore size (mm)	16
Allowable kinetic energy (J)	0.17

1. In terms of specific load conditions, this allowable kinetic energy is equivalent to a load of 3.7 kg in mass, and a piston speed of 300 mm/sec. Therefore, if the operating conditions are below these values, there is no need to calculate.

2. Apply the following formula to obtain the kinetic energy of the load.


$$E_k = \frac{1}{2} m v^2$$

$E_k$ : Kinetic energy of load (J)  
 $m$ : Load mass (kg)  
 $v$ : Piston speed (m/s)

3. The piston speed will exceed the average speed immediately before locking. To determine the piston speed for the purpose of obtaining the kinetic energy of load, use 1.2 times the average speed as a guide.

4. The relationship between the speed and the load is indicated in the graph below. The area below the line is the allowable kinetic energy range.

5. During locking, the lock mechanism must sustain the thrust of the cylinder, in addition to absorbing the energy of the load. Therefore, there is an upper limit to the size of the load that can be sustained. Thus, a horizontally mounted cylinder must be operated below the solid line, and a vertically mounted cylinder must be operated below the dotted line.

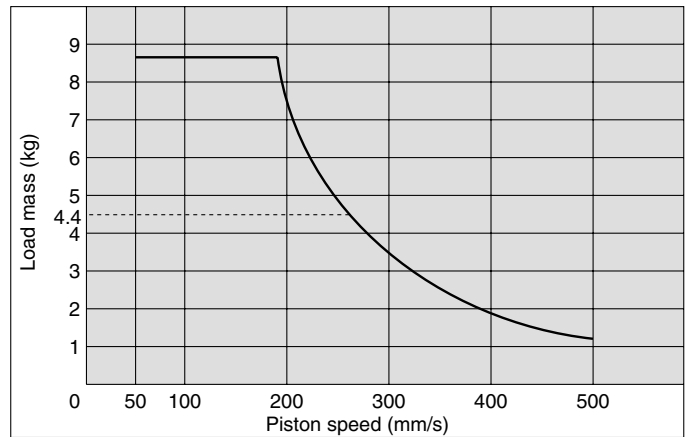


## Holding Force of Spring Locking (Maximum static load)

Bore size (mm)	16
Holding force (N)	122

Note) Holding force at piston rod extended side decreases approximately 15%.

## Holding Force of Pneumatic Locking (Maximum static load)

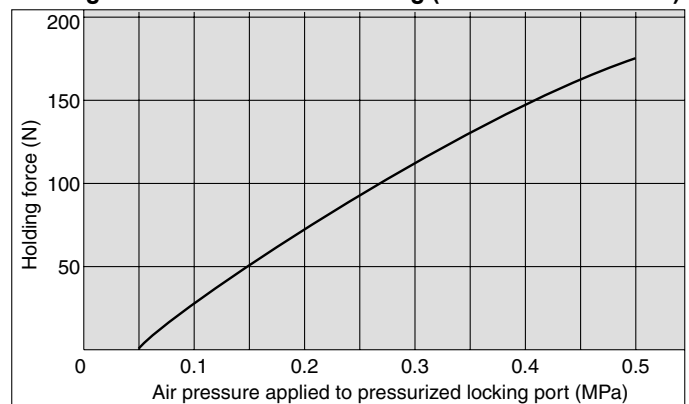

\* When selecting cylinders, refer to the Precautions and allowable kinetic energy when locking on page 596, and then select a cylinder.

## Caution

### Caution when Locking


Holding force is the force which can hold a static load, given no vibration or impact, in a locked state. Therefore, do not use cylinders around the maximum holding force. Note the following points.

- If the piston rod slips because the lock's holding force has been exceeded, the brake shoe could be damaged, resulting in a reduced holding force or shortened life.
- To use the lock for drop prevention purposes, the load to be attached to the cylinder must be within 35% of the cylinder's holding force.
- Do not use the cylinder in the locked state to sustain a load that involves impact.


# Series CLJ2

## Construction (Not able to disassemble)

### Spring locking (Exhaust locking) Spring and pneumatic locking

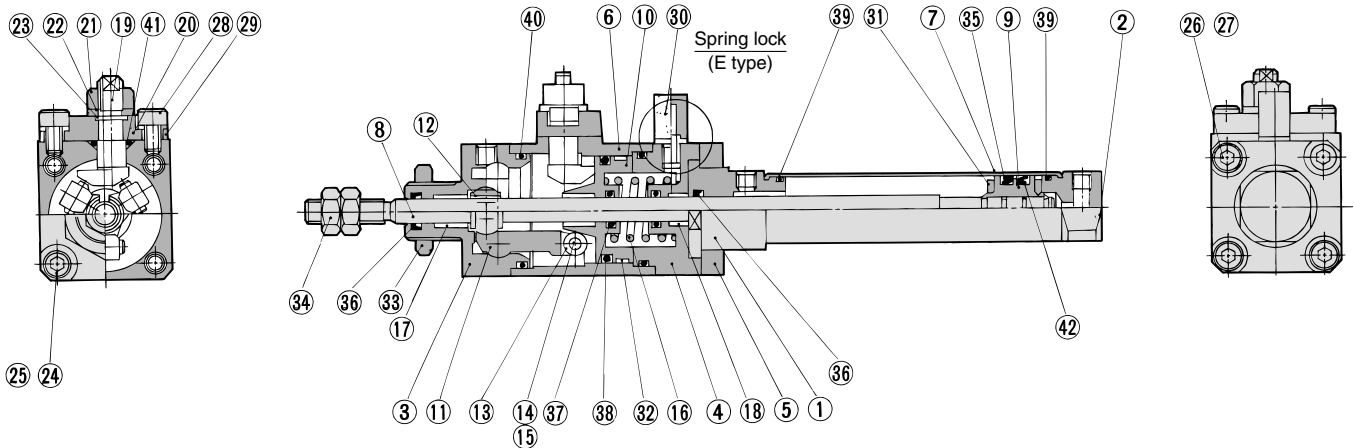

### Pneumatic locking (Pressure locking)

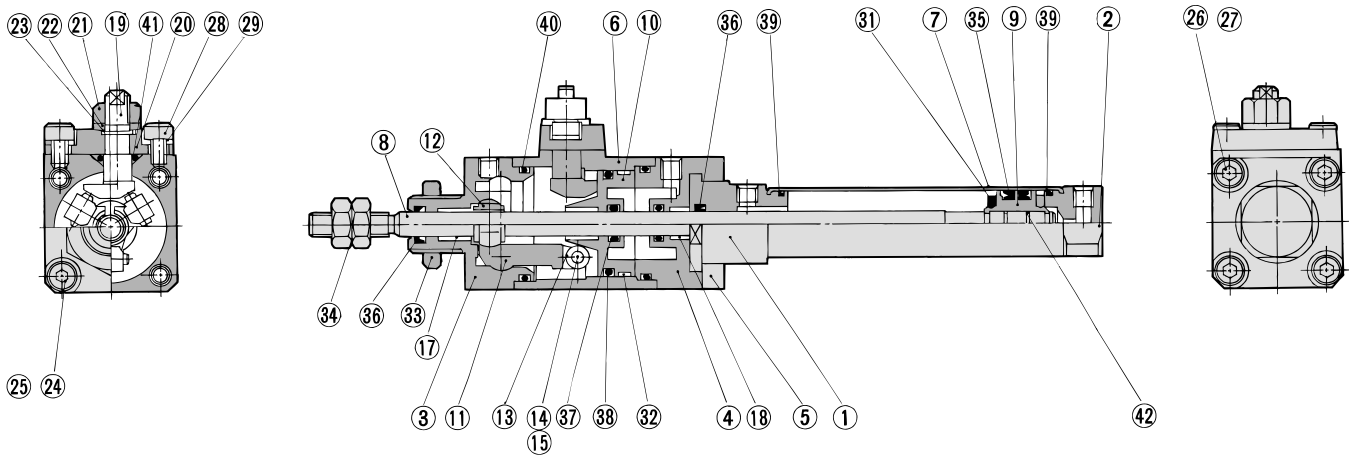

### Component Parts


No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Clear anodized
2	Head cover	Aluminum alloy	Clear anodized
3	Cover A	Carbon steel	Nitrided, nickel chrome plated
4	Cover B	Aluminum alloy	Hard anodized
5	Cover C	Aluminum alloy	Hard anodized
6	Intermediate cover	Aluminum alloy	Hard anodized
7	Cylinder tube	Stainless steel	
8	Piston rod	Stainless steel	Hard chrome plated
9	Piston	Brass	
10	Brake piston	Carbon steel	Nitrided
11	Brake arm	Carbon steel	Nitrided
12	Brake shoe	Special friction material	
13	Roller	Carbon steel	Nitrided
14	Pin	Carbon steel	Heat treated
15	Retaining ring	Carbon tool steel	Nickel plated
16	Brake spring	Steel wire	Zinc chromated
17	Bushing A	Oil-impregnated sintered alloy	
18	Bushing B	Oil-impregnated sintered alloy	
19	Manual lock release cam	Chromium molybdenum steel	Nitrided
20	Cam guide	Carbon steel	Nitrided, platinum silver painted
21	Lock nut	Rolled steel	Nickel plated

No.	Description	Material	Note
22	Plain washer	Rolled steel	Nickel plated
23	Retaining ring	Carbon tool steel	Nickel plated
24	Hexagon socket head cap screw	Chromium molybdenum steel	Nickel plated
25	Spring washer	Steel wire	Nickel plated
26	Hexagon socket head cap screw	Chromium molybdenum steel	Nickel plated
27	Spring washer	Steel wire	Nickel plated
28	Hexagon socket head cap screw	Chromium molybdenum steel	Nickel plated
29	Spring washer	Steel wire	Nickel plated
30	Silencer	Bronze	Type E only
31	Bumper	Urethane	
32	Wear ring	Resin	
33	Mounting nut	Brass	Nickel plated
34	Rod end nut	Rolled steel	Nickel plated
35	Piston seal	NBR	
36	Rod seal A	NBR	
37	Rod seal B	NBR	
38	Brake piston seal	NBR	
39	Cylinder tube gasket	NBR	
40	Intermediate cover gasket	NBR	
41	Cam gasket	NBR	
42	Piston gasket	NBR	

# Fine Lock Cylinder Double Acting, Single Rod **Series CLJ2**


## Basic Style (B)

CLJ2B16-□□- $\overline{P}$

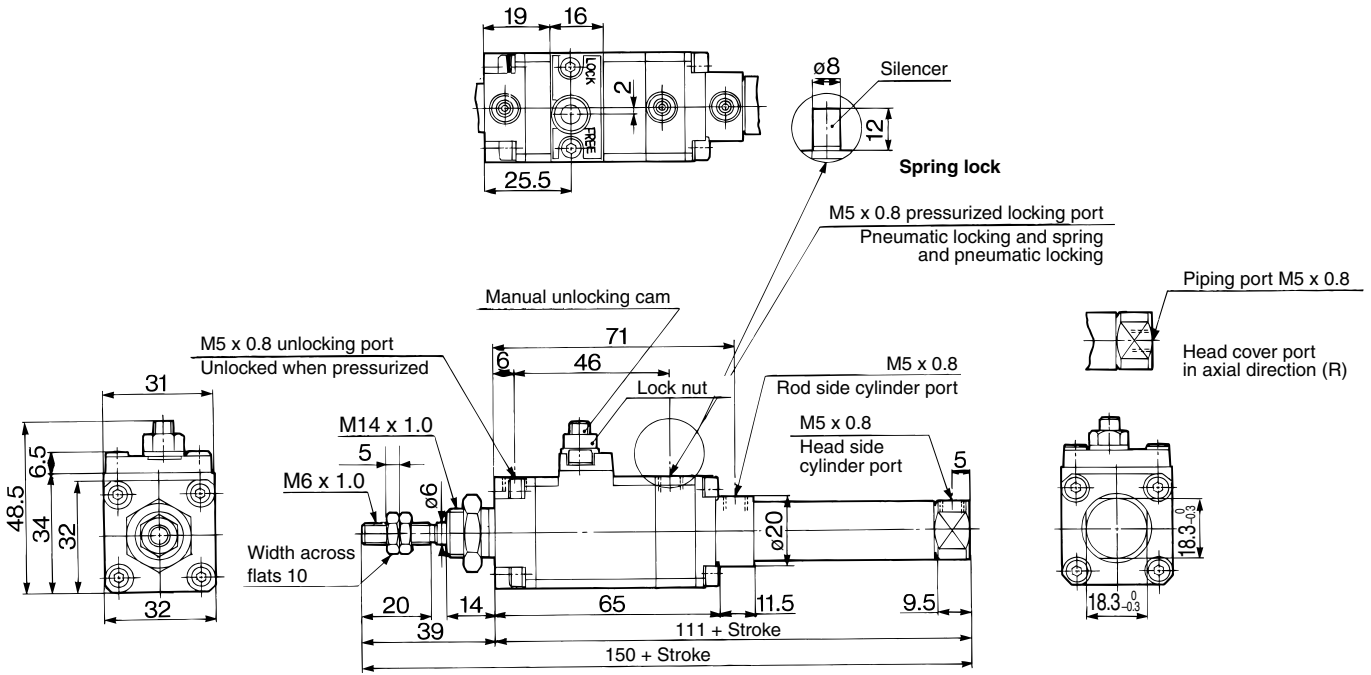

## Axial Foot Style (L)

CLJ2L16-□□- $\overline{P}$

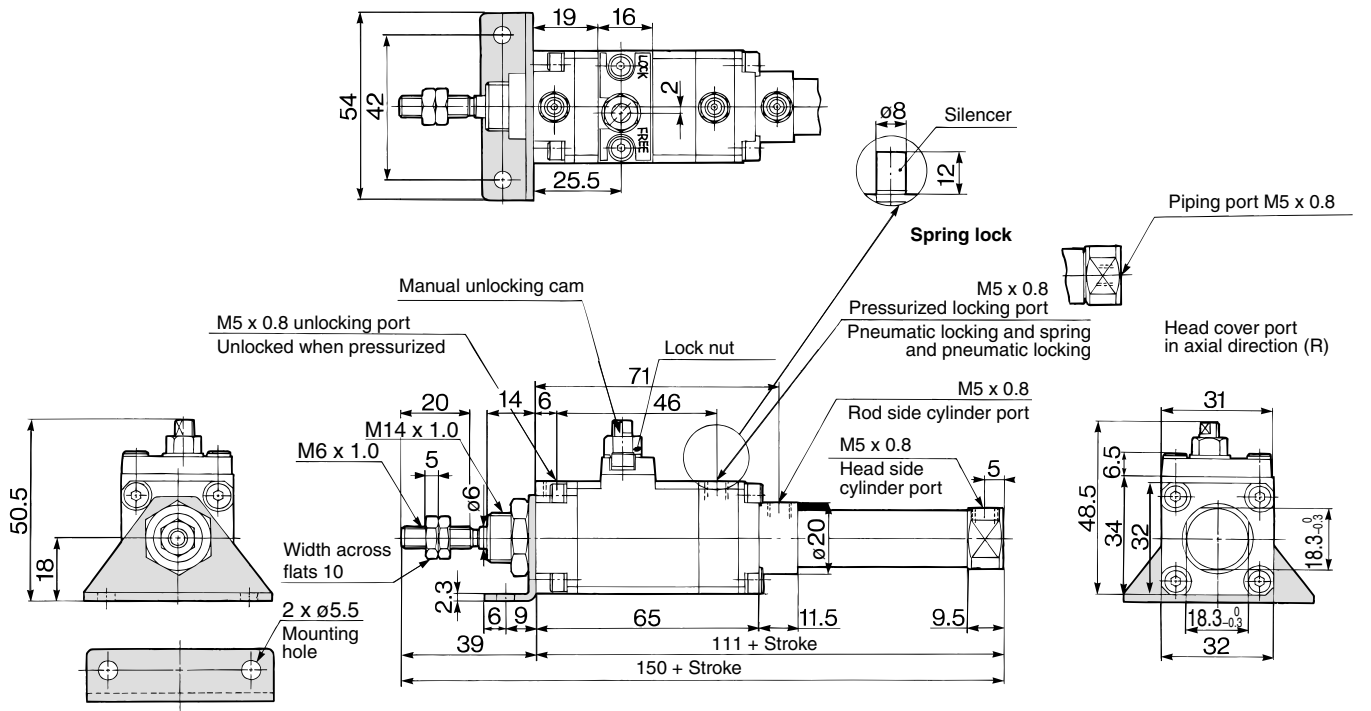

CLJ2

CLM2

CLG1

CL1

MLGC

CNG

MNB

CNA

CNS

CLS

CLQ

RLQ

MLU

MLGP

ML1C

D-□

-X□

Individual


-X□



# Series CLJ2


## Rod Side Flange Style (F)

CLJ2F16-□□- $\frac{E}{P}$

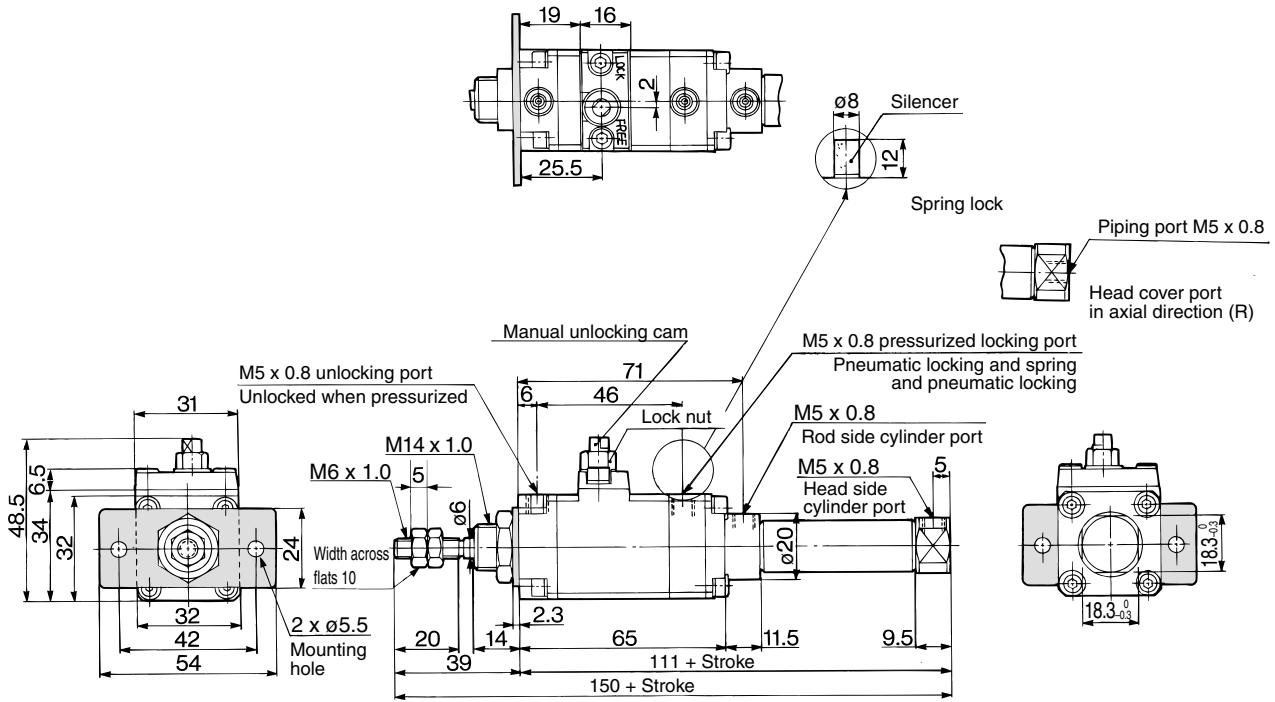


## Double Clevis Style (D) \* Clevis pin and retaining ring are shipped together.

CLJ2D16-□□- $\frac{E}{P}$

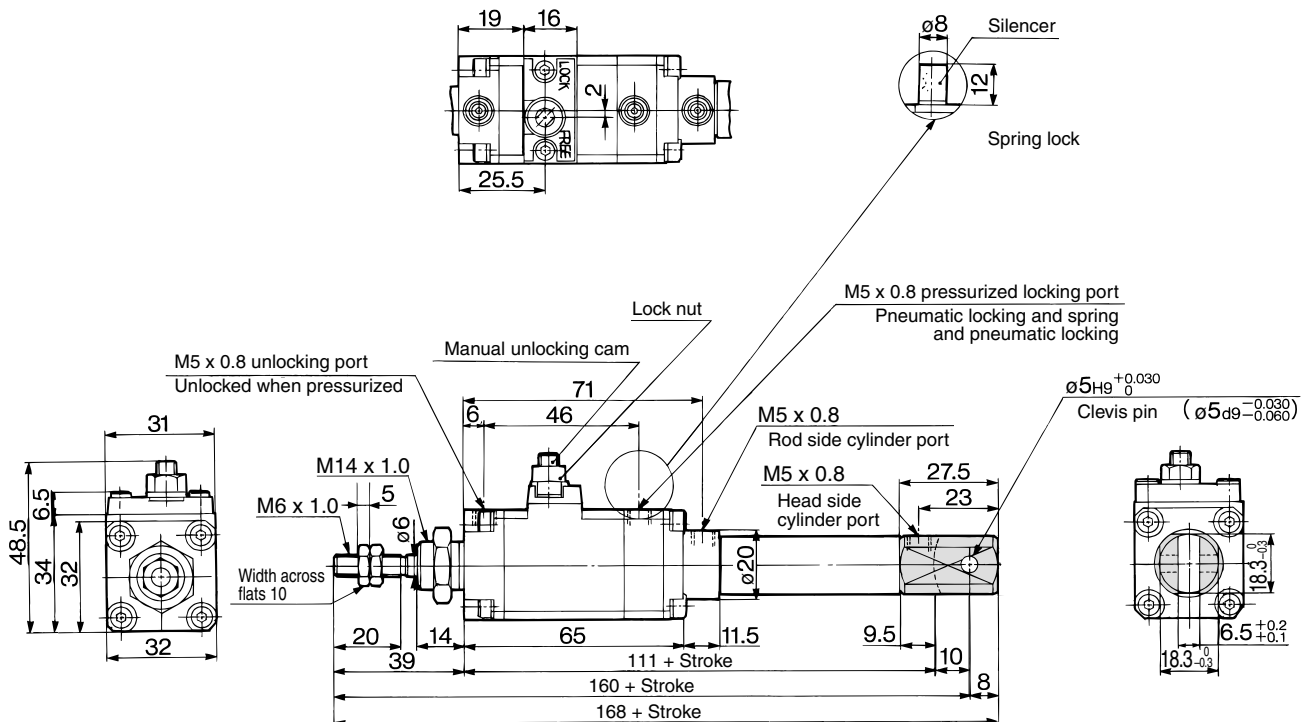

## Accessory Bracket Dimensions


### Single Knuckle Joint: I-LJ016B



Material: Rolled steel


### Double Knuckle Joint: Y-LJ016B

\* Knuckle pin and retaining ring are shipped together.



Material: Rolled steel


### Rod End Nut: NT-015A



Material: Rolled steel

### Clevis Pin: CD-Z015


\* Retaining rings are shipped together.



Material: Stainless steel


### Knuckle Pin: IY-J015A

\* Retaining rings are shipped together.




Material: Stainless steel

### Mounting Nut: SNLJ-016B



Material: Brass

### T-bracket: CJ-T016B

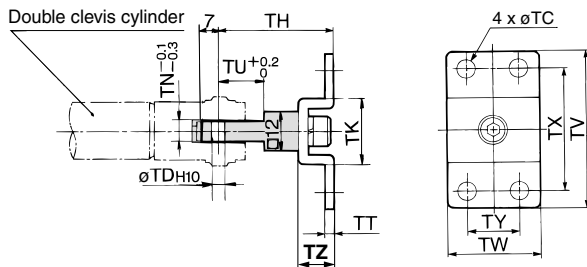

Material: Rolled steel

Part no.	Bore size (mm)	TC	TDH10	TH	TK	TN	TT	TU	TV	TW	TX	TY	TZ
<b>CJ-T016B</b>	<b>16</b>	5.5	5 <sup>+0.048</sup> <sub>0</sub>	35	20	6.4	2.3	14	48	28	38	16	10

\* T-bracket includes a T-bracket base, single knuckle joint, hexagon socket head cap screw and spring washer.

CLJ2

CLM2

CLG1

CL1

MLGC

CNG

MNB

CNA

CNS

CLS

CLQ

RLQ

MLU

MLGP

ML1C

D-□

-X□


Individual  
-X□

# Series CLJ2


## Auto Switch Proper Mounting Position (Detection at Stroke End) and Its Mounting Height

### Reed auto switch <Band Mounting>


#### D-A9□

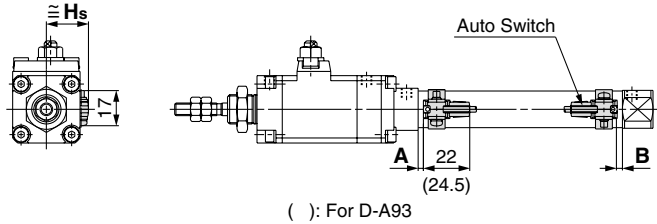

#### D-C7□/C80

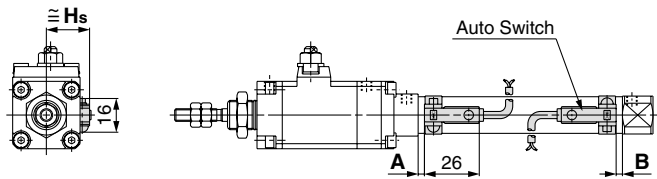


#### D-C73C□/C80C

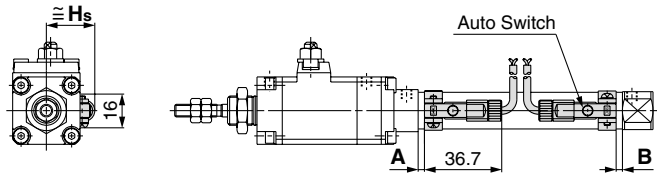


### Solid state auto switch <Band Mounting>


#### D-M9□ D-M9□W

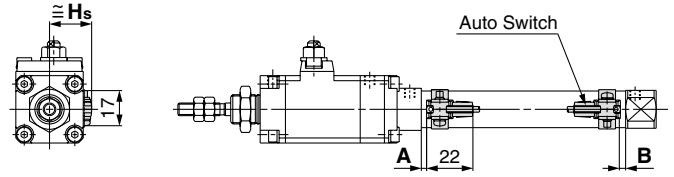

#### D-H7□ D-H7□W D-H7BAL D-H7NF

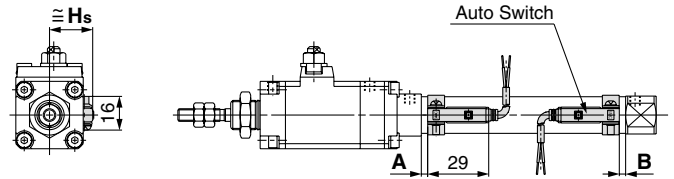

#### D-H7C

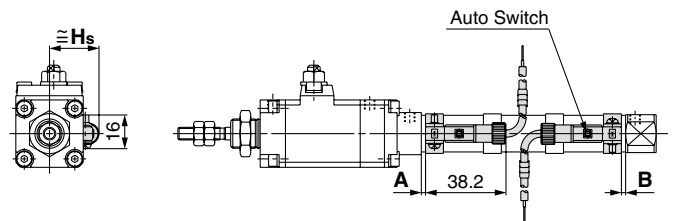

## Auto Switch Proper Mounting Position (Detection at Stroke End) and Its Mounting Height

### Auto Switch Proper Mounting Position (mm)

Auto switch model	D-A9□		D-M9□ D-M9□W		D-C7□ D-C80 D-C73C D-C80C	
	A	B	A	B	A	B
Bore size (mm)						
16	2.5	2.5	6.5	6.5	3	3

Note) Adjust the auto switch after confirming the operating conditions in the actual setting.

### Auto Switch Mounting Height (mm)

Auto switch model	D-A9□ D-M9□ D-M9□W		D-C7□/C80 D-H7□/H7□W D-H7NF D-H7BAL		D-C73C D-C80C		D-H7C	
	Hs		Hs		Hs		Hs	
Bore size (mm)								
16	20		20.5		23		23.5	

### Minimum Auto Switch Mounting Stroke

Auto switch mounting	Auto switch model	No. of auto switches mounted				
		1	2		n (n: No. of auto switches)	
			Different surfaces	Same surface	Different surfaces	Same surface
Band mounting	D-A9□ D-M9□ D-M9□W	10	15 <sup>(1)</sup>	45 <sup>(1)</sup>	$15 + 35 \frac{(n-2)}{2}$ (n = 2, 4, 6...)	$45 + 15(n-2)$
	D-C7□ D-C80	10	15	50	$15 + 40 \frac{(n-2)}{2}$ (n = 2, 4, 6...)	$50 + 20(n-2)$
	D-H7□ D-H7□W D-H7BAL D-H7NF	10	15	60	$15 + 45 \frac{(n-2)}{2}$ (n = 2, 4, 6...)	$60 + 22.5(n-2)$
	D-C73C D-C80C D-H7C	10	15	65 <sup>(2)</sup>	$15 + 50 \frac{(n-2)}{2}$ (n = 2, 4, 6...)	$50 + 27.5(n-2)$

Note 1) The following table is applicable for cylinders with two D-A93/M9□/M9□W auto switches.  
Note 2) For Series CDLJ2, 65 strokes cannot be manufactured, as a reference.

### Operating Range

Auto switch model	Bore size (mm)
D-A9□	16
D-M9□ D-M9□W	7
D-C7□/C80 D-C73C/C80C	3
D-H7□/H7□W/H7BAL/H7NF	7
D-H7C	4
	9

\* Since the operating range is provided as a guideline including hysteresis, it cannot be guaranteed (assuming approximately ±30% dispersion). It may vary substantially depending on an ambient environment.

CLJ2

CLM2

CLG1

CL1

MLGC

CNG

MNB

CNA

CNS

CLS

CLQ

RLQ

MLU

MLGP

ML1C

Auto switch model	With 2 auto switches	
	Different surfaces	Same surface
	<p>The proper auto switch mounting position is 5.5 mm inward from the switch holder edge.</p>	<p>The auto switch is mounted by slightly displacing it in a direction (cylinder tube circumferential exterior) so that the auto switch and lead wire do not interfere with each other.</p>
D-A93	—	Less than 50 strokes
D-M9□ D-M9□W	Less than 20 strokes	Less than 55 strokes

### Auto Switch Mounting Bracket: Part No.

Auto switch model	Bore size (mm)
D-A9□ D-M9□ D-M9□W	(1) ① BJ2-016 ② BJ3-1
D-C7□/C80 D-C73C/C80C D-H7□ D-H7□W D-H7BAL D-H7NF	BJ2-016

Note 1) Two kinds of auto switch mounting brackets are used as a set.


#### [Mounting screw set made of stainless steel]

The following set of mounting screws made of stainless steel is available. Use it in accordance with the operating environment. (Please order the auto switch mounting bracket separately, since it is not included.)

BBA4: For D-C7/C8/H7 types

Note 2) Refer to page 1814 for the details of BBA4.

D-H7BAL auto switch is set on the cylinder with the stainless steel screws above when shipped. When an auto switch is shipped independently, BBA4 is attached.

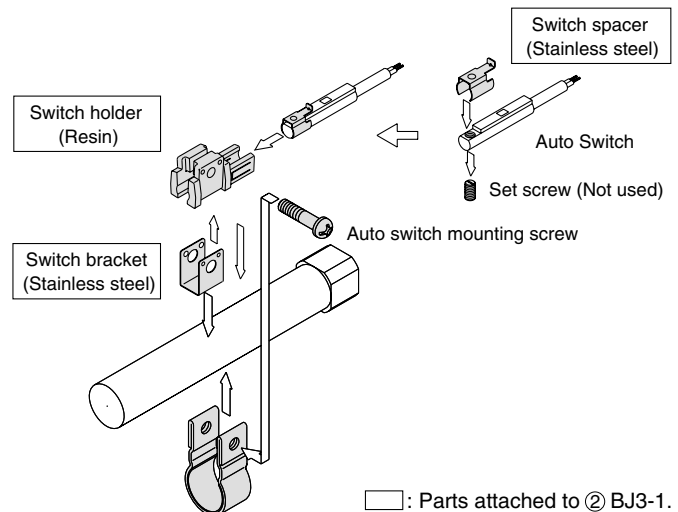

#### 1. Auto Switch Mounting Bracket

D-□

-X□

Individual  
-X□

# Series CLJ2

Besides the models listed in How to Order, the following auto switches are applicable. Refer to pages 1719 to 1827 for the detailed specifications.

Auto switch type	Part no.	Electrical entry (Fetching direction)	Features
<b>Reed</b>	D-C73, C76	Grommet (In-line)	—
	D-C80		Without indicator light
<b>Solid state</b>	D-H7A1, H7A2, H7B		—
	D-H7NW, H7PW, H7BW		Diagnostic indication (2-color indication)

\* For solid state auto switches, auto switches with a pre-wired connector are also available. Refer to pages 1784 and 1785 for details.

\* Normally closed (NC = b contact) solid state auto switches (D-F9G/F9H types) are also available. Refer to page 1746 for details.

# Fine Lock Cylinder

## Double Acting, Single Rod

# Series *CLM2*

ø20, ø25, ø32, ø40

### How to Order

**CLM2**  **L**  **25**  - **100**  - **E** -

**With auto switch** **CDLM2**  **L**  **25**  - **100**  - **E** - **M9BW**  -

**With auto switch** (Built-in magnet)

**Type**

Nil	Pneumatic
H	Air-hydro

**Port thread type**

Nil	Rc
TN	NPT

**Mounting style**

<b>B</b>	Basic style	<b>T</b>	Head side trunnion style
<b>L</b>	Axial foot style	<b>E</b>	Clevis integrated style
<b>F</b>	Rod side flange style	<b>BZ</b>	Boss-cut basic style
<b>G</b>	Head side flange style	<b>FZ</b>	Boss-cut flange style
<b>C</b>	Single clevis style		
<b>D</b>	Double clevis style		

**Bore size**

<b>20</b>	20 mm
<b>25</b>	25 mm
<b>32</b>	32 mm
<b>40</b>	40 mm

**Cylinder stroke (mm)**

Refer to "Standard Stroke" on page 612.

**With rod boot**

Nil	None
<b>J</b>	Nylon tarpaulin
<b>K</b>	Heat resistant tarpaulin

**Auto switch**

Nil	Without auto switch
-----	---------------------

\* For the applicable auto switch model, refer to the table below.

**Lock operation**

<b>E</b>	Spring locking (Exhaust locking)
<b>P</b>	Pneumatic locking (Pressure locking)
<b>D</b>	Spring and pneumatic locking

**Number of auto switches**

Nil	2 pcs.
<b>S</b>	1 pc.
<b>n</b>	"n" pcs.

**Made to Order**  
Refer to page 612 for details.

### Built-in Magnet Cylinder Model

If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch.  
(Example) CDLM2F32-100-P

### Applicable Auto Switch/Refer to pages 1719 to 1827 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model	Lead wire length (m)					Pre-wired connector	Applicable load		
					DC	AC		0.5 (Nil)	1 (M)	3 (L)	5 (Z)	None (N)				
Solid state switch	—	Grommet	Yes	3-wire (NPN)	5 V, 12 V	—	<b>M9N</b>	●	●	●	○	○	○	IC circuit	Relay, PLC	
				3-wire (PNP)			<b>M9P</b>	●	●	●	○	○				
		Connector		2-wire	12 V	<b>M9B</b>	●	—	●	○	○					
		Terminal conduit		3-wire (NPN)	5 V, 12 V	<b>H7C</b>	●	—	●	●	—					
	Diagnostic indication (2-color indication)	Grommet	Yes	2-wire	12 V	—	<b>G39A</b>	—	—	—	—	●	—	IC circuit		
				3-wire (NPN)	5 V, 12 V		<b>K39A</b>	—	—	—	—	●	—	—		
		3-wire (PNP)		5 V, 12 V	<b>M9NW</b>	●	●	●	○	○	○	IC circuit				
		2-wire		12V	<b>M9PW</b>	●	●	●	○	○	○	IC circuit				
		Water resistant (2-color indication)		Grommet	2-wire	12V	—	<b>M9BW</b>	●	—	●	○	○	○		—
		With diagnostic output (2-color indication)			4-wire (NPN)	5 V, 12 V		<b>H7BA</b>	—	—	●	○	○	○		—
Reed switch	—	Grommet	Yes	3-wire (NPN equivalent)	—	5V	<b>A96</b>	●	—	●	—	—	—	IC circuit	—	
				Connector	2-wire	24 V	12 V	100 V	<b>A93</b>	●	—	●	—	—	—	—
		100 V or less						<b>A90</b>	●	—	●	—	—	—	IC circuit	
		100 V, 200V						<b>B54</b>	●	—	●	●	—	—	—	
		200 V or less						<b>B64</b>	●	—	●	—	—	—	—	
		Terminal conduit		2-wire	24 V	12 V	—	<b>C73C</b>	●	—	●	●	●	—	—	
							24 V or less	<b>C80C</b>	●	—	●	●	●	—	IC circuit	
							—	<b>A33A</b>	—	—	—	—	●	—	—	
							—	<b>A34A</b>	—	—	—	—	●	—	—	
		DIN terminal		Grommet	Yes	2-wire	24 V	12 V	100 V, 200 V	<b>A44A</b>	—	—	—	—	●	—
—	<b>B59W</b>		●						—	●	—	—	—	—		

\* Lead wire length symbols: 0.5 m ..... Nil (Example) M9NW  
 1 m ..... M (Example) M9NWM  
 3 m ..... L (Example) M9NWL  
 5 m ..... Z (Example) M9NWZ  
 None ..... N (Example) H7CN

\* Solid state auto switches marked with "○" are produced upon receipt of order.  
 \* D-A9□V□/M9□V□/M9□WV□/M9□A(V)L types cannot be mounted.  
 \* Do not indicate suffix "N" for no lead wire on D-A3□A/A44A/G39A/K39A models.

\* Since there are other applicable auto switches than listed above, refer to page 624 for details.  
 \* For details about auto switches with pre-wired connector, refer to pages 1784 and 1785.  
 \* D-A9□/M9□/M9□W auto switches are shipped together (not assembled). (Only auto switch mounting brackets are assembled at the time of shipment.)

CLJ2

CLM2

CLG1

CL1

MLGC

CNG

MNB

CNA

CNS

CLS

CLQ

RLQ

MLU

MLGP

ML1C

D-□

-X□

Individual

-X□

# Series CLM2


**Provided with a compact lock mechanism, it is suitable for intermediate stop, emergency stop, and drop prevention.**

## Locking in both directions

The piston rod can be locked in either direction of its cylinder stroke.

## Maximum piston speed: 500 mm/s

It can be used at 50 to 500 mm/s provided that it is within the allowable kinetic energy range.

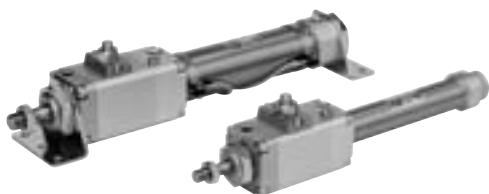

**Made to Order Specifications**  
(For details, refer to page 1836.)

Symbol	Specifications
—XA□	Change of rod end shape

## Rod Boot Material

Symbol	Rod boot material	Maximum ambient temperature
<b>J</b>	Nylon tarpaulin	70°C
<b>K</b>	Heat resistant tarpaulin	110°C *

\* Maximum ambient temperature for the rod boot itself.

Refer to pages 621 to 624 for cylinders with auto switches.

- Minimum auto switch mounting stroke
- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range
- Switch mounting bracket: Part no.

## Specifications

Bore size (mm)	20	25	32	40
<b>Action</b>	Double acting, Single rod			
<b>Type</b>	Air cylinder			
<b>Lock operation</b>	Spring locking (Exhaust locking) Pneumatic locking (Pressurized locking), Spring and pneumatic locking			
<b>Fluid</b>	Air			
<b>Proof pressure</b>	1.5 MPa			
<b>Maximum operating pressure</b>	1.0 MPa			
<b>Minimum operating pressure</b>	0.08 MPa			
<b>Ambient and fluid temperature</b>	Without auto switch: -10 to 70°C (No freezing) With auto switch: -10 to 60°C (No freezing)			
<b>Lubrication</b>	Not required (Non-lube)			
<b>Piston speed</b>	50 to 500 mm/s *			
<b>Cushion</b>	Rubber bumper (Standard equipment)			
<b>Stroke length tolerance</b>	+1.4 0			
<b>Piping/Screw-in type</b>	Rc 1/8		Rc 1/4	
<b>Mounting</b>	Basic style, Axial foot style, Rod side flange style, Head side flange style, Single clevis style, Double clevis style, Head side trunnion style, Clevis integrated style, Boss-cut basic style, Boss-cut flange style			

\* Constraints associated with the allowable kinetic energy are imposed on the speeds at which the piston can be locked. The maximum speed of 750 mm/s can be accommodated if the piston is to be locked in the stationary state for the purpose of drop prevention.

## Fine Lock Specifications

Lock operation	Spring locking (Exhaust locking)	Spring and pneumatic locking	Pneumatic locking (Pressure locking)
<b>Fluid</b>	Air		
<b>Maximum operating pressure</b>	0.5 MPa		
<b>Unlocking pressure</b>	0.3 MPa or more		0.1 MPa or more
<b>Lock starting pressure</b>	0.25 MPa or less		0.05 MPa or more
<b>Locking direction</b>	Both directions		

\* Refer to page 614 for the allowable kinetic energy when locking, holding force of spring locking and stopping accuracy.

## Standard Stroke / Refer to the minimum auto switch mounting stroke (page 623) for those with an auto switch.

Bore size (mm)	Standard stroke <sup>(1)</sup> (mm)	Maximum stroke (mm)
<b>20</b>	25, 50, 75, 100, 125, 150 200, 250, 300	1000
<b>25</b>		1500
<b>32</b>		2000
<b>40</b>		2000



Note 1) Intermediate strokes other than listed above are produced upon receipt of order. Manufacture of intermediate strokes at 1 mm intervals is possible. (Spacers are not used.)

Note 2) When exceeding 300 strokes, the allowable maximum stroke length is determined by the stroke selection table (technical data).



## Mounting Bracket and Accessory

Accessory Mounting	Standard equipment			Option			
	Mounting nut	Rod end nut	Clevis pin	Single knuckle joint	Double <sup>(3)</sup> knuckle joint	Clevis <sup>(4)</sup> pivot bracket	Rod boot
Basic style	● (1pc.)	●	—	●	●	—	●
Axial foot style	● (2)	●	—	●	●	—	●
Rod side flange style	● (1)	●	—	●	●	—	●
Head side flange style	● (1)	●	—	●	●	—	●
Clevis integrated style	— <sup>(1)</sup>	●	—	●	●	●	●
Single clevis style	— <sup>(1)</sup>	●	—	●	●	—	●
Double clevis style <sup>(3)</sup>	— <sup>(1)</sup>	●	●	●	●	—	●
Head side trunnion style	● (1) <sup>(2)</sup>	●	—	●	●	—	●
Boss-cut basic style	● (1)	●	—	●	●	—	●
Boss-cut flange style	● (1)	●	—	●	●	—	●
Note					With pin	With pin	

Note 1) Mounting nut is not equipped with clevis integrated style, single clevis style and double clevis style.

Note 2) Trunnion nuts are attached for head side trunnion style.

Note 3) Pin and retaining ring (ø40: cotter pin) are shipped together with double clevis and double knuckle joint.

Note 4) Pin and retaining ring are shipped together with clevis pivot bracket.

## Mass

(kg)

Bore size (mm)		20	25	32	40
Basic mass	Basic style	0.55	0.87	0.94	1.30
	Axial foot style	0.70	1.03	1.10	1.57
	Flange style	0.61	0.96	1.03	1.42
	Clevis integrated style	0.53	0.85	0.93	1.26
	Single clevis style	0.59	0.91	0.98	1.39
	Double clevis style	0.60	0.93	0.99	1.43
	Trunnion style	0.59	0.94	1.00	1.40
	Boss-cut basic style	0.54	0.85	0.92	1.27
	Boss-cut flange style	0.60	0.94	1.01	1.39
Additional mass per each 50 mm of stroke		0.04	0.06	0.08	0.13
Option bracket	Clevis bracket (With pin)	0.07	0.07	0.14	0.14
	Single knuckle joint	0.06	0.06	0.06	0.23
	Double knuckle joint (With pin)	0.07	0.07	0.07	0.20

Calculation: (Example) **CLM2L32-100-E**

- Basic mass ..... 1.10 (Foot, ø32)
- Additional mass ..... 0.08/50 stroke
- Cylinder stroke ..... 100 stroke

$$1.10 + 0.08 \times 100/50 = 1.26 \text{ kg}$$

## Mounting Bracket Part No.

Bore size (mm)	20	25	32	40
Axial foot *	CM-L020B	CM-L032B	CM-L040B	
Flange	CM-F020B	CM-F032B	CM-F040B	
Single clevis	CM-C020B	CM-C032B	CM-C040B	
Double clevis **	CM-D020B	CM-D032B	CM-D040B	
Trunnion (with nut)	CM-T020B	CM-T032B	CM-T040B	

\* When ordering foot bracket, order 2 pieces per cylinder.

\*\* Clevis pin and retaining ring (ø40: cotter pin) are shipped together with double clevis style.

## Boss-cut style

Boss for the head side cover bracket is eliminated and the total length of cylinder is shortened.



## Comparison of the full length dimension (Versus standard type)

(mm)

ø20	ø25	ø32	ø40
▲13	▲13	▲13	▲16

## Mounting style

■ Boss-cut basic style (BZ) ■ Boss-cut flange style (FZ)


## Air-hydro

CLM2H   —

↓ Air-hydro

Low hydraulic cylinder 1 MPa or less

Through the concurrent use of a CC series air-hydro unit, it is possible to operate at a constant or low speeds or to effect an intermediate stop, just like a hydraulic unit, while using pneumatic equipment such as a valve.

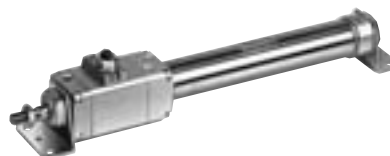

## Specifications

Fluid	Turbine oil (Lock portion is air)
Action	Double acting, Single rod
Bore size (mm)	ø20, ø25, ø32, ø40
Maximum operating pressure	1.0 MPa
Minimum operating pressure	0.2 MPa
Piston speed	15 to 300 mm/s
Cushion	Rubber bumper (Standard equipment)
Piping	Screw-in type
Mounting	Basic style, Axial foot style, Rod side flange style Head side flange style, Single clevis style Double clevis style, Head side trunnion style Clevis integrated style, Boss-cut style

\* Auto switch capable

- For an exterior dimension diagram to identify the mounting support types, refer to pages 616 to 620 as the dimensions are identical to those of standard.

CLJ2

CLM2

CLG1

CL1

MLGC

CNG

MNB

CNA

CNS

CLS

CLQ

RLQ

MLU

MLGP

ML1C

D-□

-X□


Individual  
-X□

# Series CLM2

## ⚠ Caution/Allowable Kinetic Energy when Locking

Bore size (mm)	20	25	32	40
Allowable kinetic energy (J)	0.26	0.42	0.67	1.19

- In terms of specific load conditions, the allowable kinetic energy indicated in the table above is equivalent to a 50% load ratio at 0.5 MPa, and a piston speed of 300 mm/sec. Therefore, if the operating conditions are below these values, calculations are unnecessary.
- Apply the following formula to obtain the kinetic energy of the load.
 
$$E_k = \frac{1}{2} m v^2$$
 Ek: Kinetic energy of load (J)  
 m: Load mass (kg)  
 v: Piston speed (m/s)
- The piston speed will exceed the average speed immediately before locking. To determine the piston speed for the purpose of obtaining the kinetic energy of load, use 1.2 times the average speed as a guide.
- The relation between the speed and the load of the respective tube bores is indicated in the diagram below. Use the cylinder in the range below the line.
- During locking, the lock mechanism must sustain the thrust of the cylinder itself, in addition to absorbing the energy of the load. Therefore, even within a given allowable kinetic energy level, there is an upper limit to the size of the load that can be sustained. Thus, a horizontally mounted cylinder must be operated below the solid line, and a vertically mounted cylinder must be operated below the dotted line.

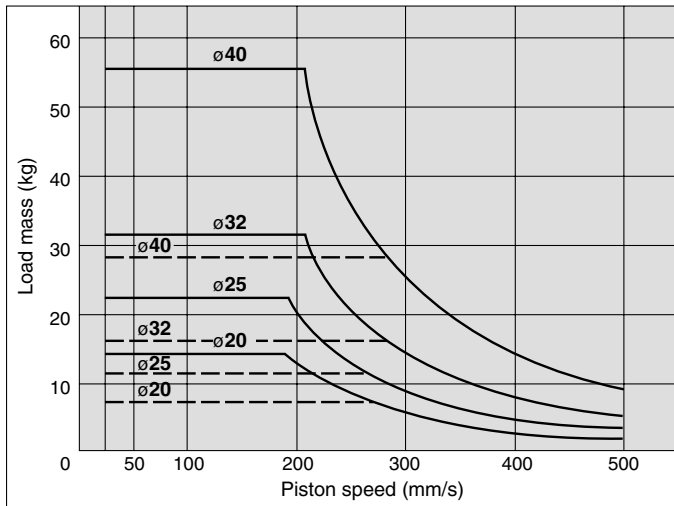

## Stopping Accuracy (Not including tolerance of control system.) (mm)

Locking method	Piston speed (mm/s)				
	20 *	50	100	300	500
Spring locking (Exhaust locking)	±0.3	±0.4	±0.5	±1.0	±2.0
Pneumatic locking (Pressure locking)	±0.15	±0.2	±0.3	±0.5	±1.5
Spring and pneumatic locking					

Conditions: Load: 25% of thrust force at 0.5 MPa

Solenoid valve: Mounted to the lock port

20 mm/s marked with the asterisk is in the case of actuating hydraulically by means of air-hydro type.

## ⚠ Caution

### Recommended Pneumatic Circuit/Caution on Handling

For detailed specifications of the fine lock cylinder, Series CLM2 mentioned above, refer to pages 596 to 599.

## Accessory


For accessory dimensions, refer to pages 144 and 145 in Best Pneumatics No. 2, since it is same as Series CM2.

## Holding Force of Spring Locking (Maximum static load)

Bore size (mm)	20	25	32	40
Holding force (N)	196	313	443	784

Note) Holding force at piston rod extended side decreases approximately 15%.

## Holding Force of Spring Locking (Maximum static load)

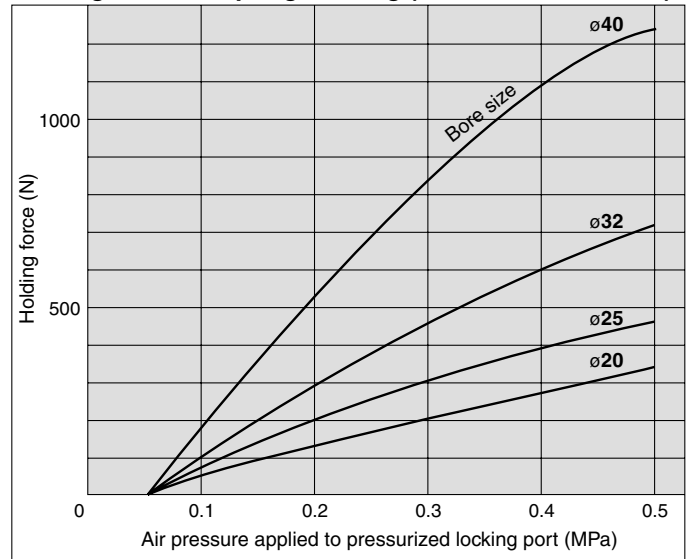

\* When selecting cylinders, refer to the Precautions and allowable kinetic energy when locking on page 596, and then select a cylinder.

## ⚠ Caution


### Caution when Locking

Holding force is the force which can hold a static load, given no vibration or impact in a locked state. Therefore, do not use cylinders around the maximum holding force. Note the following points.


- If the piston rod slips because the lock's holding force has been exceeded, the brake shoe could be damaged, resulting in a reduced holding force or shortened life.
- Do not use the cylinder in the locked state to sustain a load that involves impact.
- To use the lock for drop prevention purposes, the load to be attached to the cylinder must be within 35% of the cylinder's holding force.

**Construction (Not able to disassemble)**

Spring locking (Exhaust locking)  
Spring and pneumatic locking

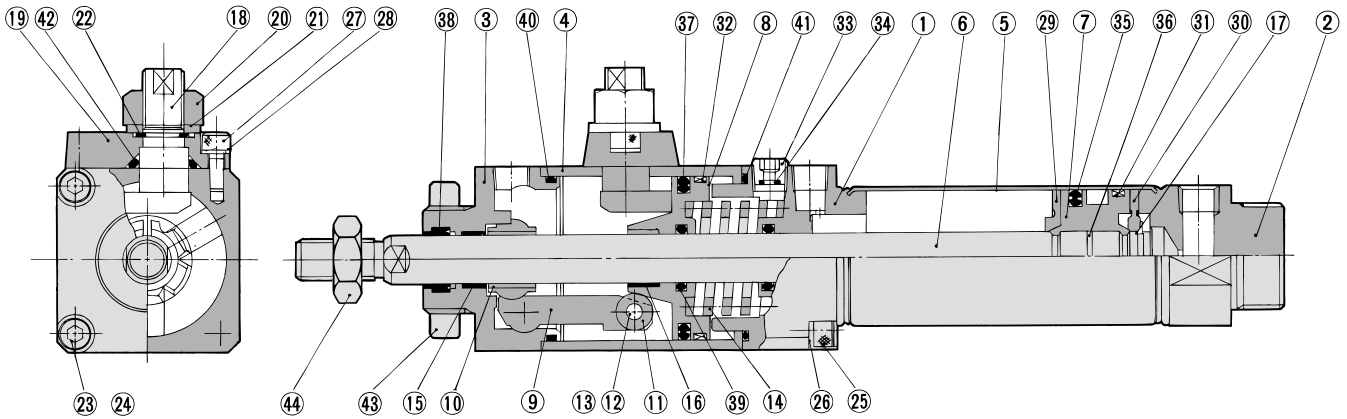

Pneumatic locking (Pressure locking)

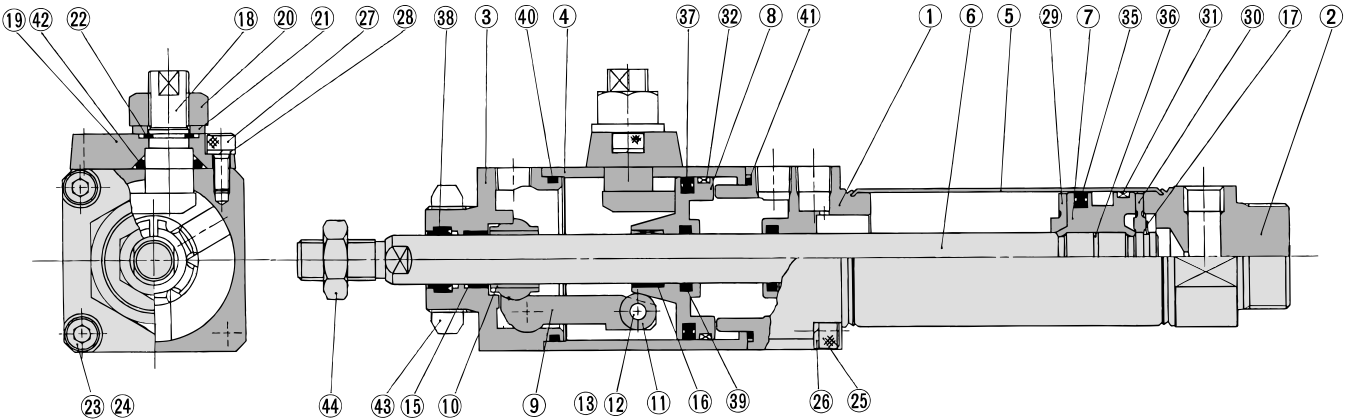

CLJ2

CLM2

CLG1

CL1

MLGC

CNG

MNB

CNA

CNS

CLS

CLQ

RLQ

MLU

MLGP

ML1C

**Component Parts**

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Clear anodized
2	Head cover	Aluminum alloy	Clear anodized
3	Cover	Carbon steel	Nitrided, chrome plated
4	Intermediate cover	Aluminum alloy	Hard anodized
5	Cylinder tube	Stainless steel	
6	Piston rod	Carbon steel	Hard chrome plated
7	Piston	Aluminum alloy	Chromated
8	Brake piston	Carbon steel	Nitrided
9	Brake arm	Carbon steel	Nitrided
10	Brake shoe	Special friction material	
11	Roller	Carbon steel	
12	Pin	Carbon steel	
13	Retaining ring	Carbon tool steel	Nickel plated
14	Brake spring	Spring steel wire	Dacrodized
15	Bushing	Oil-impregnated sintered alloy	
16	Bushing	Oil-impregnated sintered alloy	
17	Retaining ring	Carbon tool steel	Nickel plated
18	Manual lock release cam	Chromium molybdenum steel	Nickel plated
19	Cam guide	Carbon steel	Nitrided, painted
20	Lock nut	Rolled steel	Nickel plated
21	Flat washer	Rolled steel	Nickel plated
22	Retaining ring	Carbon tool steel	Nickel plated
23	Hexagon socket head cap screw	Chromium molybdenum steel	Nickel plated

No.	Description	Material	Note
24	Spring washer	Steel wire	Nickel plated
25	Hexagon socket head cap screw	Chromium molybdenum steel	Nickel plated
26	Spring washer	Steel wire	Nickel plated
27	Hexagon socket head cap screw	Chromium molybdenum steel	Nickel plated
28	Spring washer	Steel wire	Nickel plated
29	Bumper A	Urethane	
30	Bumper B	Urethane	
31	Wear ring	Resin	
32	Wear ring	Resin	
33	Hexagon socket head plug	Carbon steel	Type E only
34	Element	Bronze	Type E only
35	Piston seal	NBR	
36	Piston gasket	NBR	
37	Brake piston seal	NBR	
38	Rod seal A	NBR	
39	Rod seal B	NBR	
40	Middle cover gasket A	NBR	
41	Middle cover gasket B	NBR	
42	Cam gasket	NBR	
43	Mounting nut	Carbon steel	Nickel plated
44	Rod end nut	Carbon steel	Nickel plated

D-□

-X□


Individual  
-X□

# Series CLM2

## Basic Style (B)



CLM2B  —

### Standard style

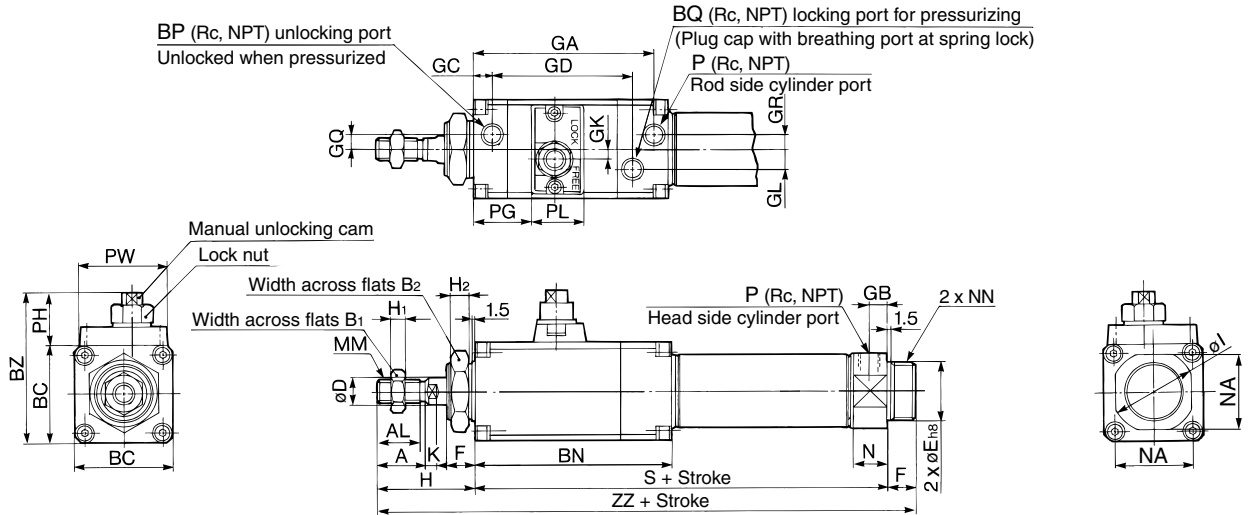

### Boss-cut style

### With rod boot

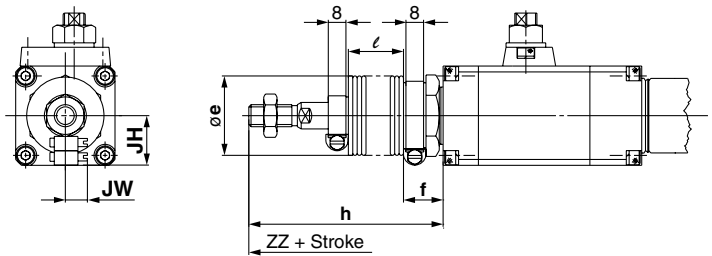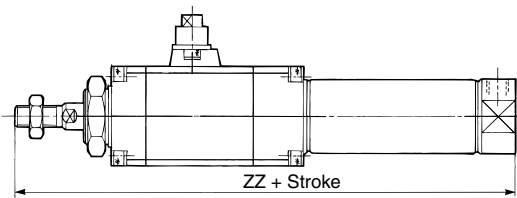

Bore (mm)	Stroke range	A	AL	B <sub>1</sub>	B <sub>2</sub>	BC	BN	BP	BQ	BZ	D	E	F	GA	GB	GC	GD	GK	GL	GQ	GR	H	H <sub>1</sub>	H <sub>2</sub>	I
20	Up to 300	18	15.5	13	26	38	80	1/8	1/8	57.5	8	20 <sup>0</sup> <sub>-0.033</sub>	13	73.5	8	8	55	3.5	6	4	4	41	5	8	28
25	Up to 300	22	19.5	17	32	45	90	1/8	1/8	69	10	26 <sup>0</sup> <sub>-0.033</sub>	13	83.5	8	9	64.5	4	9	7	7	45	6	8	33.5
32	Up to 300	22	19.5	17	32	45	90	1/8	1/8	69	12	26 <sup>0</sup> <sub>-0.033</sub>	13	83.5	8	9	64.5	4	9	7	7	45	6	8	37.5
40	Up to 300	24	21	22	41	52	100.5	1/8	1/8	76	14	32 <sup>0</sup> <sub>-0.039</sub>	16	90.5	11	8	70	4	11	8	7	50	8	10	46.5

Bore (mm)	K	MM	N	NA	NN	P	PG	PH	PL	PW	S	ZZ
20	5	M8 x 1.25	15	24	M20 x 1.5	1/8	22	19.5	20	38	127	181
25	5.5	M10 x 1.25	15	30	M26 x 1.5	1/8	27	24	24	41	137	195
32	5.5	M10 x 1.25	15	34.5	M26 x 1.5	1/8	27	24	24	41	139	197
40	7	M14 x 1.5	21.5	42.5	M32 x 2	1/4	29	24	24	41	167	233

Bore (mm)	ZZ
20	168
25	182
32	184
40	217


### With Rod Boot

Bore (mm)	e	f	h					ℓ					ZZ					JH (Reference)	JW (Reference)
			1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300		
20	36	17	68	81	93	106	131	12.5	25	37.5	50	75	208	221	233	246	271	23.5	10.5
25	36	17	72	85	97	110	135	12.5	25	37.5	50	75	222	232	247	260	285	23.5	10.5
32	36	17	72	85	97	110	135	12.5	25	37.5	50	75	224	237	249	262	287	23.5	10.5
40	46	19	77	90	102	115	140	12.5	25	37.5	50	75	260	273	285	298	323	23.5	10.5

# Fine Lock Cylinder Double Acting, Single Rod **Series CLM2**

## Axial Foot Style (L)

**CLM2L**  —

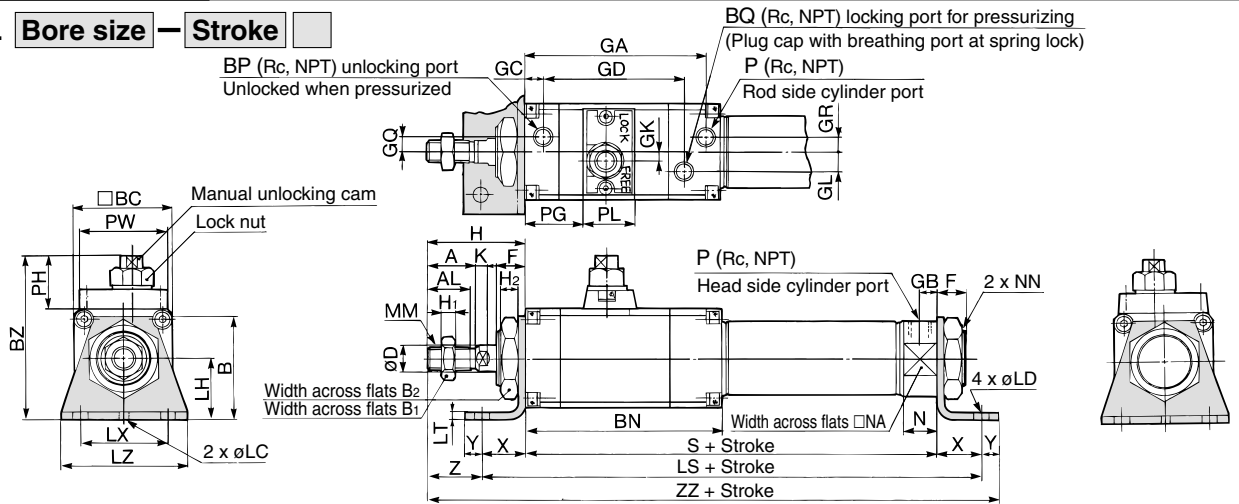


Bore (mm)	Stroke range	A	AL	B	B <sub>1</sub>	B <sub>2</sub>	BC	BN	BP	BQ	BZ	D	F	GA	GB	GC	GD	GK	GL	GQ	GR	H	H <sub>1</sub>	H <sub>2</sub>
20	Up to 400	18	15.5	40	13	26	38	80	1/8	1/8	63.5	8	13	73.5	8	8	55	3.5	6	4	4	41	5	8
25	Up to 450	22	19.5	47	17	32	45	90	1/8	1/8	74.5	10	13	83.5	8	9	64.5	4	9	7	7	45	6	8
32	Up to 450	22	19.5	47	17	32	45	90	1/8	1/8	74.5	12	13	83.5	8	9	64.5	4	9	7	7	45	6	8
40	Up to 500	24	21	54	22	41	52	100.5	1/8	1/8	80	14	16	90.5	11	8	70	4	11	8	7	50	8	10

Bore (mm)	K	LC	LD	LH	LS	LT	LX	LZ	MM	N	NA	NN	P	PG	PH	PL	PW	S	X	Y	Z	ZZ
20	5	4	6.8	25	167	3.2	40	55	M8 x 1.25	15	24	M20 x 1.5	1/8	22	19.5	20	38	127	20	8	21	196
25	5.5	4	6.8	28	177	3.2	40	55	M10 x 1.25	15	30	M26 x 1.5	1/8	27	24	24	41	137	20	8	25	210
32	5.5	4	6.8	28	179	3.2	40	55	M10 x 1.25	15	34.5	M26 x 1.5	1/8	27	24	24	41	139	20	8	25	212
40	7	4	7	30	213	3.2	55	75	M14 x 1.5	21.5	42.5	M32 x 2	1/4	29	24	24	41	167	23	10	27	250

## Head Side Flange Style (G)

**CLM2G**  —

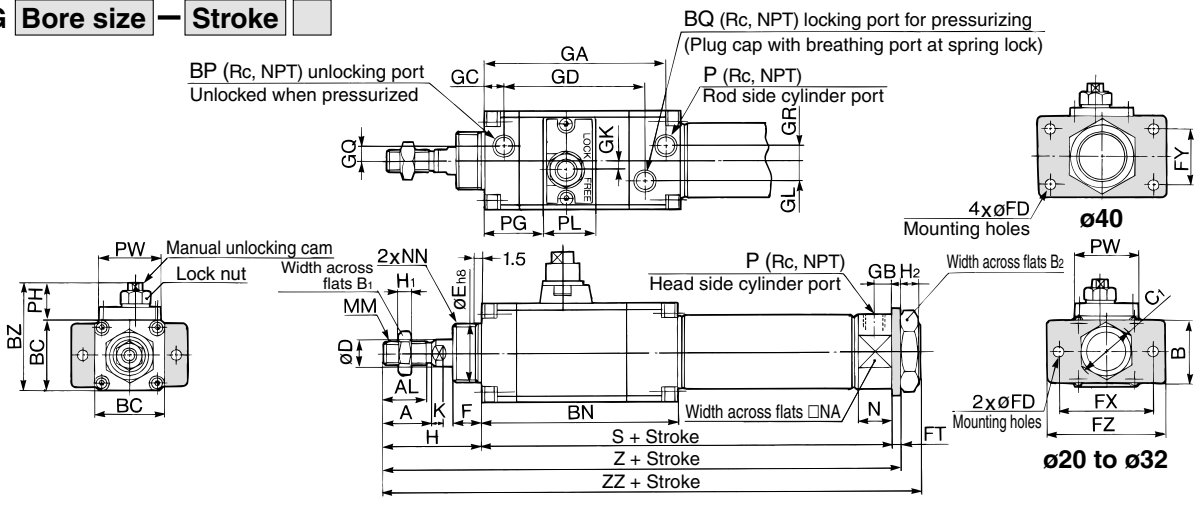

Bore (mm)	Stroke range	A	AL	B	B <sub>1</sub>	B <sub>2</sub>	BC	BN	BP	BQ	BZ	C <sub>1</sub>	D	E	F	FD	FT	FX	FY	FZ	GA	GB
20	Up to 300	18	15.5	34	13	26	38	80	1/8	1/8	57.5	30	8	20 <sup>0 -0.033</sup>	13	7	4	60	—	75	73.5	8
25	Up to 300	22	19.5	40	17	32	45	90	1/8	1/8	69	37	10	26 <sup>0 -0.033</sup>	13	7	4	60	—	75	83.5	8
32	Up to 300	22	19.5	40	17	32	45	90	1/8	1/8	69	37	12	26 <sup>0 -0.033</sup>	13	7	4	60	—	75	83.5	8
40	Up to 300	24	21	52	22	41	52	100.5	1/8	1/8	76	47.3	14	32 <sup>0 -0.039</sup>	16	7	5	66	36	82	90.5	11

Bore (mm)	GC	GD	GK	GL	GQ	GR	H	H <sub>1</sub>	H <sub>2</sub>	K	MM	N	NA	NN	P	PG	PH	PL	PW	S	Z	ZZ
20	8	55	3.5	6	4	4	41	5	8	5	M8 x 1.25	15	24	M20 x 1.5	1/8	22	19.5	20	38	127	172	181
25	9	64.5	4	9	7	7	45	6	8	5.5	M10 x 1.25	15	30	M26 x 1.5	1/8	27	24	24	41	137	186	195
32	9	64.5	4	9	7	7	45	6	8	5.5	M10 x 1.25	15	34.5	M26 x 1.5	1/8	27	24	24	41	139	188	197
40	8	70	4	11	8	7	50	8	10	7	M14 x 1.5	21.5	42.5	M32 x 2	1/4	29	24	24	41	167	222	233

CLJ2

CLM2

CLG1

CL1

MLGC

CNG

MNB

CNA

CNS

CLS

CLQ

RLQ

MLU

MLGP

ML1C

D-□


-X□

Individual  
-X□


# Series CLM2

## Rod Side Flange Style (F)

CLM2F Bore size — Stroke

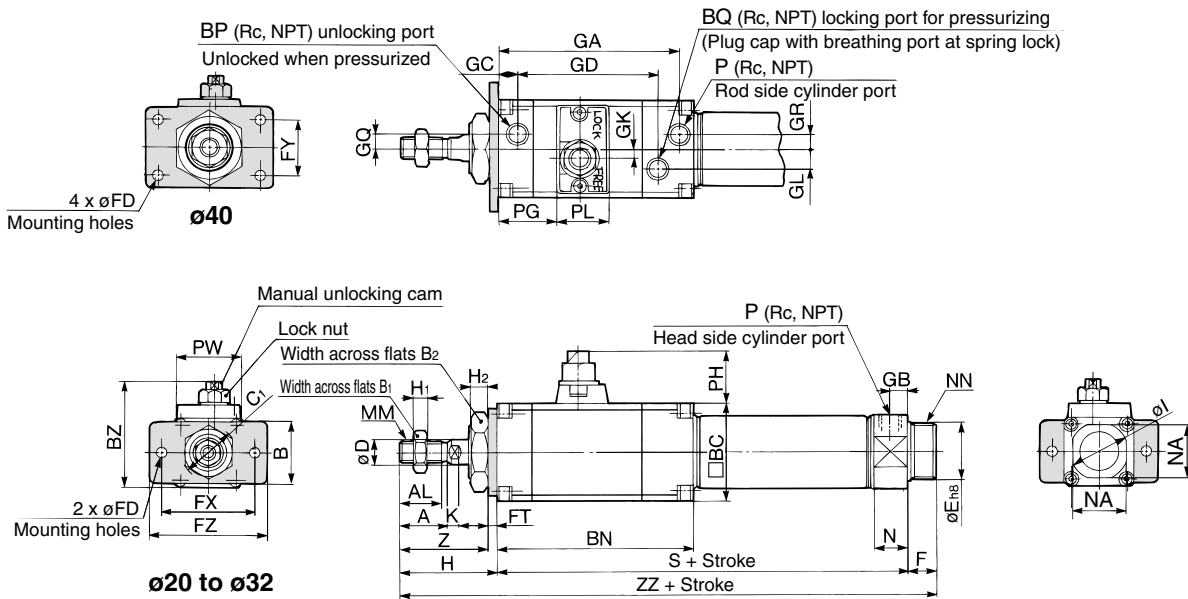

### Boss-cut style

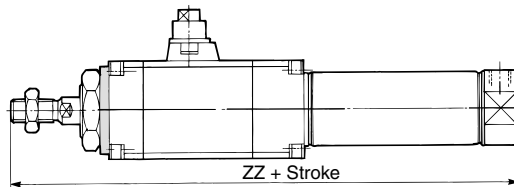


Bore (mm)	Stroke range	A	AL	B	B <sub>1</sub>	B <sub>2</sub>	BC	BN	BP	BQ	BZ	C <sub>1</sub>	D	E	F	FD	FT	FX	FY	FZ	GA	GB	GC	GD	GK
20	Up to 400	18	15.5	34	13	26	38	80	1/8	1/8	57.5	30	8	20 <sup>0</sup> <sub>-0.033</sub>	13	7	4	60	—	75	73.5	8	8	55	3.5
25	Up to 450	22	19.5	40	17	32	45	90	1/8	1/8	69	37	10	26 <sup>0</sup> <sub>-0.033</sub>	13	7	4	60	—	75	83.5	8	9	64.5	4
32	Up to 450	22	19.5	40	17	32	45	90	1/8	1/8	69	37	12	26 <sup>0</sup> <sub>-0.033</sub>	13	7	4	60	—	75	83.5	8	9	64.5	4
40	Up to 500	24	21	52	22	41	52	100.5	1/8	1/8	76	47.3	14	32 <sup>0</sup> <sub>-0.039</sub>	16	7	5	66	36	82	90.5	11	8	70	4

Bore (mm)	GL	GQ	GR	H	H <sub>1</sub>	H <sub>2</sub>	I	K	MM	N	NA	NN	P	PG	PH	PL	PW	S	Z	ZZ
20	6	4	4	41	5	8	28	5	M8 x 1.25	15	24	M20 x 1.5	1/8	22	19.5	20	38	127	37	181
25	9	7	7	45	6	8	33.5	5.5	M10 x 1.25	15	30	M26 x 1.5	1/8	27	24	24	41	137	41	195
32	9	7	7	45	6	8	37.5	5.5	M10 x 1.25	15	34.5	M26 x 1.5	1/8	27	24	24	41	139	41	197
40	11	8	7	50	8	10	46.5	7	M14 x 1.5	21.5	42.5	M32 x 2	1/4	29	24	24	41	167	45	233

Boss-cut	
Bore (mm)	ZZ
20	168
25	182
32	184
40	217

**Single Clevis Style (C)**

CLM2C **Bore size** — **Stroke**

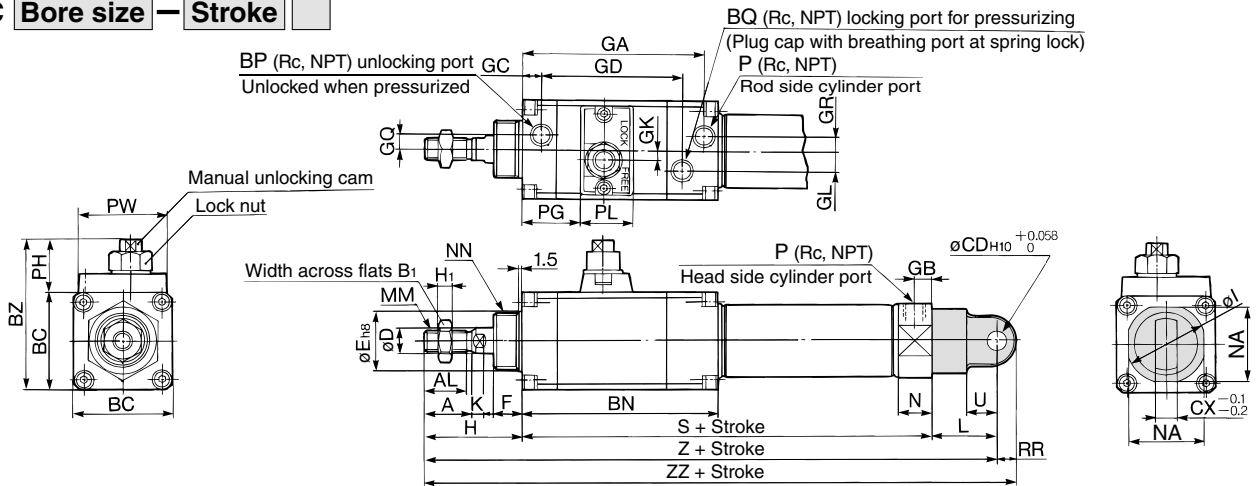


Bore (mm)	Stroke range	A	AL	B <sub>1</sub>	BC	BN	BP	BQ	BZ	CD	CX	D	E	F	GA	GB	GC	GD	GK	GL	GQ
20	Up to 300	18	15.5	13	38	80	1/8	1/8	57.5	9	10	8	20 <sup>0</sup> <sub>-0.033</sub>	13	73.5	8	8	55	3.5	6	4
25	Up to 300	22	19.5	17	45	90	1/8	1/8	69	9	10	10	26 <sup>0</sup> <sub>-0.033</sub>	13	83.5	8	9	64.5	4	9	7
32	Up to 300	22	19.5	17	45	90	1/8	1/8	69	9	10	12	26 <sup>0</sup> <sub>-0.033</sub>	13	83.5	8	9	64.5	4	9	7
40	Up to 300	24	21	22	52	100.5	1/8	1/8	76	10	15	14	32 <sup>0</sup> <sub>-0.039</sub>	16	90.5	11	8	70	4	11	8

Bore (mm)	GR	H	H <sub>1</sub>	I	K	L	MM	N	NA	NN	P	PG	PH	PL	PW	RR	S	U	Z	ZZ
20	4	41	5	28	5	30	M8 x 1.25	15	24	M20 x 1.5	1/8	22	19.5	20	38	9	127	14	198	207
25	7	45	6	33.5	5.5	30	M10 x 1.25	15	30	M26 x 1.5	1/8	27	24	24	41	9	137	14	212	221
32	7	45	6	37.5	5.5	30	M10 x 1.25	15	34.5	M26 x 1.5	1/8	27	24	24	41	9	139	14	214	223
40	7	50	8	46.5	7	39	M14 x 1.5	21.5	42.5	M32 x 2	1/4	29	24	24	41	11	167	18	256	267

**Double Clevis Style (D)**

CLM2D **Bore size** — **Stroke**

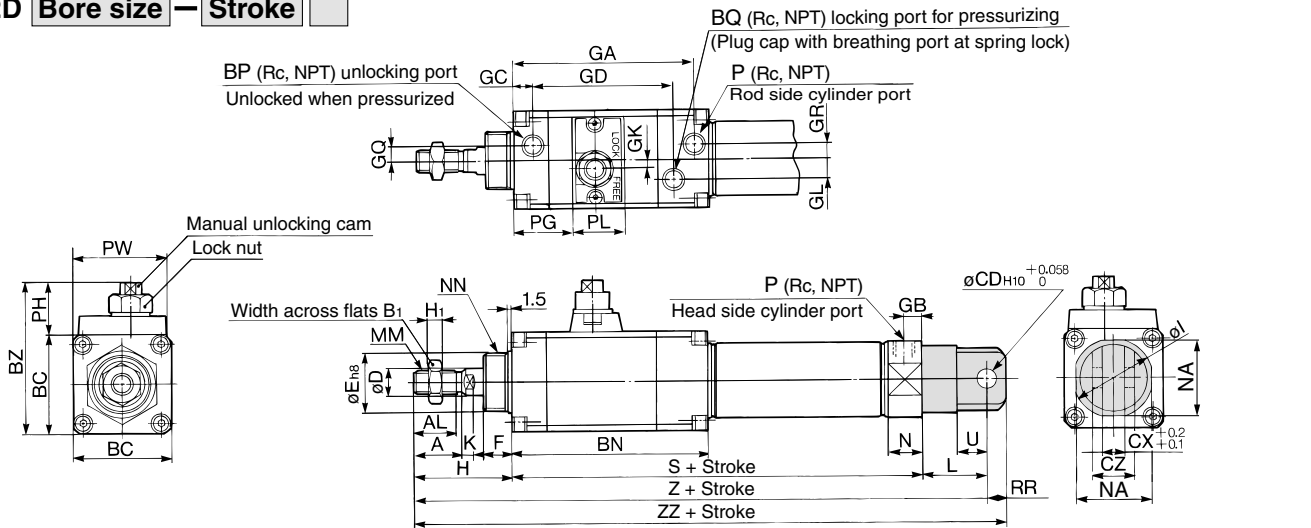

Bore (mm)	Stroke range	A	AL	B <sub>1</sub>	BC	BN	BP	BQ	BZ	CD	CX	CZ	D	E	F	GA	GB	GC	GD	GK	GL
20	Up to 300	18	15.5	13	38	80	1/8	1/8	57.5	9	10	19	8	20 <sup>0</sup> <sub>-0.033</sub>	13	73.5	8	8	55	3.5	6
25	Up to 300	22	19.5	17	45	90	1/8	1/8	69	9	10	19	10	26 <sup>0</sup> <sub>-0.033</sub>	13	83.5	8	9	64.5	4	9
32	Up to 300	22	19.5	17	45	90	1/8	1/8	69	9	10	19	12	26 <sup>0</sup> <sub>-0.033</sub>	13	83.5	8	9	64.5	4	9
40	Up to 300	24	21	22	52	100.5	1/8	1/8	76	10	15	30	14	32 <sup>0</sup> <sub>-0.039</sub>	16	90.5	11	8	70	4	11

Bore (mm)	GQ	GR	H	H <sub>1</sub>	I	K	L	MM	N	NA	NN	P	PG	PH	PL	PW	RR	S	U	Z	ZZ
20	4	4	41	5	28	5	30	M8 x 1.25	15	24	M20 x 1.5	1/8	22	19.5	20	38	9	127	14	198	207
25	7	7	45	6	33.5	5.5	30	M10 x 1.25	15	30	M26 x 1.5	1/8	27	24	24	41	9	137	14	212	221
32	7	7	45	6	37.5	5.5	30	M10 x 1.25	15	34.5	M26 x 1.5	1/8	27	24	24	41	9	139	14	214	223
40	8	7	50	8	46.5	7	39	M14 x 1.5	21.5	42.5	M32 x 2	1/4	29	24	24	41	11	167	18	256	267

\* Clevis pin and snap ring (ø40: cotter pin) are shipped together.

CLJ2

CLM2

CLG1

CL1

MLGC

CNG

MNB

CNA

CNS

CLS

CLQ

RLQ

MLU

MLGP

ML1C

D-□

-X□

Individual


-X□



# Series CLM2

## Head Side Trunnion Style (T)

CLM2T  —

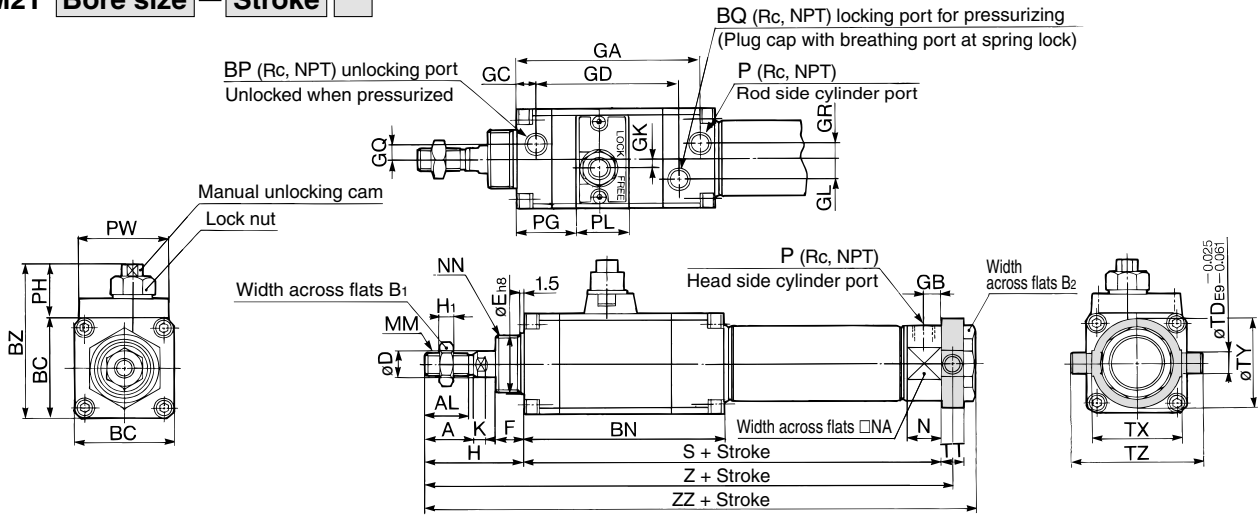


Bore (mm)	Stroke range	A	AL	B <sub>1</sub>	B <sub>2</sub>	BC	BN	BP	BQ	BZ	D	E	F	GA	GB	GC	GD	GK	GL	GQ
20	Up to 300	18	15.5	13	26	38	80	1/8	1/8	57.5	8	20 <sup>0</sup> <sub>-0.033</sub>	13	73.5	8	8	55	3.5	6	4
25	Up to 300	22	19.5	17	32	45	90	1/8	1/8	69	10	26 <sup>0</sup> <sub>-0.033</sub>	13	83.5	8	9	64.5	4	9	7
32	Up to 300	22	19.5	17	32	45	90	1/8	1/8	69	12	26 <sup>0</sup> <sub>-0.033</sub>	13	83.5	8	9	64.5	4	9	7
40	Up to 300	24	21	22	41	52	100.5	1/8	1/8	76	14	32 <sup>0</sup> <sub>-0.039</sub>	16	90.5	11	8	70	4	11	8

Bore (mm)	GR	H	H <sub>1</sub>	K	MM	N	NA	NN	P	PG	PH	PL	PW	S	TD	TT	TX	TY	TZ	Z	ZZ
20	4	41	5	5	M8 x 1.25	15	24	M20 x 1.5	1/8	22	19.5	20	38	127	8	10	32	32	52	173	183
25	7	45	6	5.5	M10 x 1.25	15	30	M26 x 1.5	1/8	27	24	24	41	137	9	10	40	40	60	187	197
32	7	45	6	5.5	M10 x 1.25	15	34.5	M26 x 1.5	1/8	27	24	24	41	139	9	10	40	40	60	189	199
40	7	50	8	7	M14 x 1.5	21.5	42.5	M32 x 2	1/4	29	24	24	41	167	10	11	53	53	77	222.5	233

## Clevis Integrated Style (E)

CLM2E  —

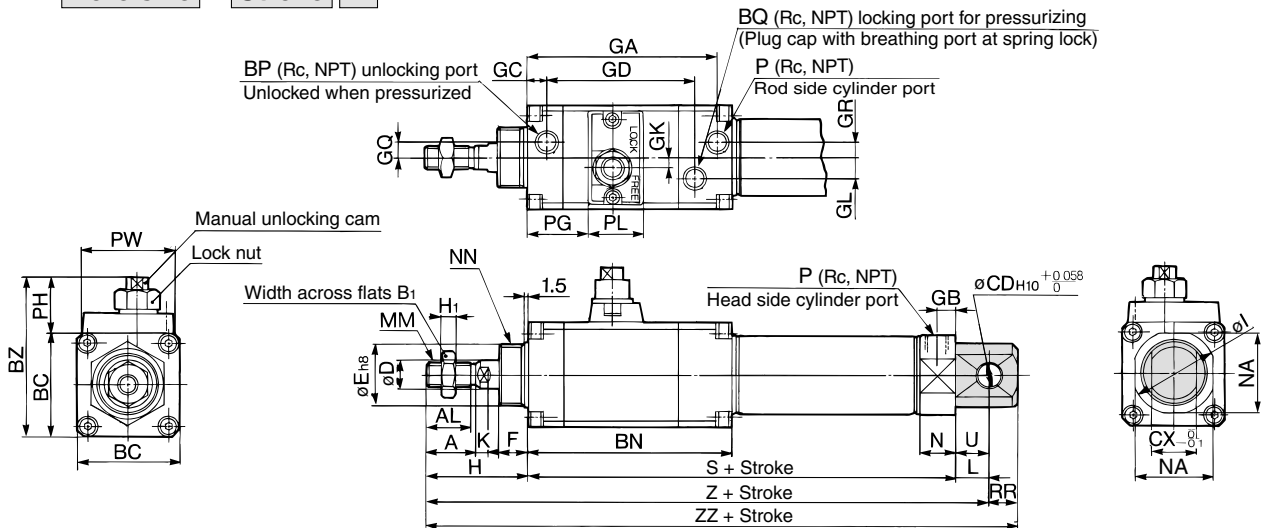

Bore (mm)	Stroke range	A	AL	B <sub>1</sub>	BC	BN	BP	BQ	BZ	CD	CX	D	E	F	GA	GB	GC	GD	GK	GL	GQ
20	Up to 300	18	15.5	13	38	80	1/8	1/8	57.5	8	12	8	20 <sup>0</sup> <sub>-0.033</sub>	13	73.5	8	8	55	3.5	6	4
25	Up to 300	22	19.5	17	45	90	1/8	1/8	69	8	12	10	26 <sup>0</sup> <sub>-0.033</sub>	13	83.5	8	9	64.5	4	9	7
32	Up to 300	22	19.5	17	45	90	1/8	1/8	69	10	20	12	26 <sup>0</sup> <sub>-0.033</sub>	13	83.5	8	9	64.5	4	9	7
40	Up to 300	24	21	22	52	100.5	1/8	1/8	76	10	20	14	32 <sup>0</sup> <sub>-0.039</sub>	16	90.5	11	8	70	4	11	8


  

Bore (mm)	GR	H	H <sub>1</sub>	I	K	L	MM	N	NA	NN	P	PG	PH	PL	PW	RR	S	U	Z	ZZ
20	4	41	5	28	5	12	M8 x 1.25	15	24	M20 x 1.5	1/8	22	19.5	20	38	9	127	11.5	180	189
25	7	45	6	33.5	5.5	12	M10 x 1.25	15	30	M26 x 1.5	1/8	27	24	24	41	9	137	11.5	194	203
32	7	45	6	37.5	5.5	15	M10 x 1.25	15	34.5	M26 x 1.5	1/8	27	24	24	41	12	139	14.5	199	211
40	7	50	8	46.5	7	15	M14 x 1.5	21.5	42.5	M32 x 2	1/4	29	24	24	41	12	167	14.5	232	244


**Auto Switch Proper Mounting Position (Detection at Stroke End) and Its Mounting Height**

**Reed auto switch**


**D-A9**□

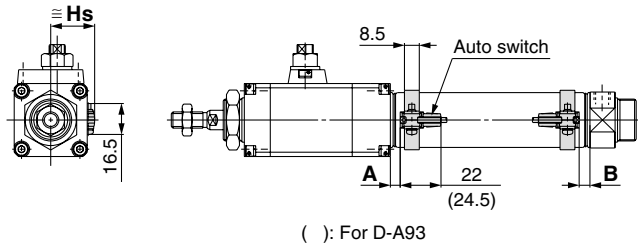


**D-C7/C8**

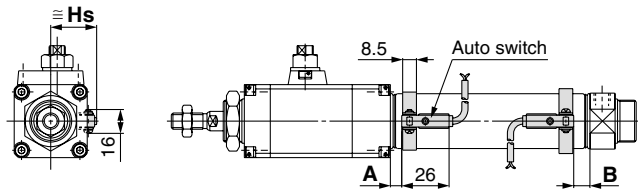


**D-B5/B6/B59W**

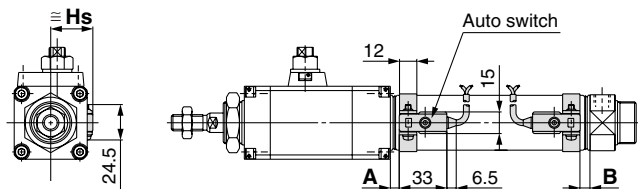


**D-A33A/A34A**

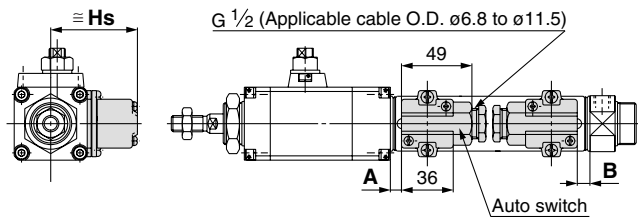

**D-A44A**

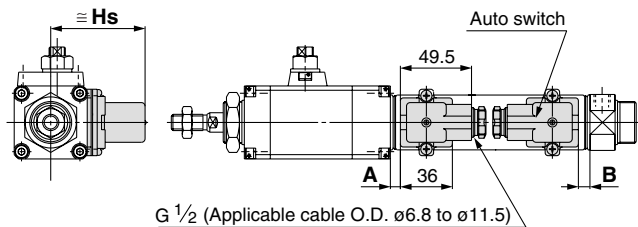


**D-C73C/C80C**

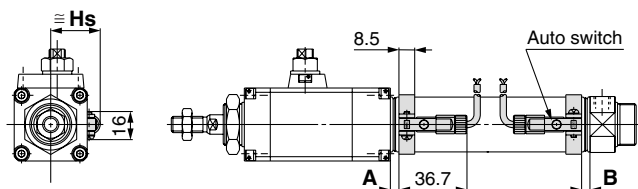


**Solid state auto switch**


**D-M9**□  
**D-M9**□W

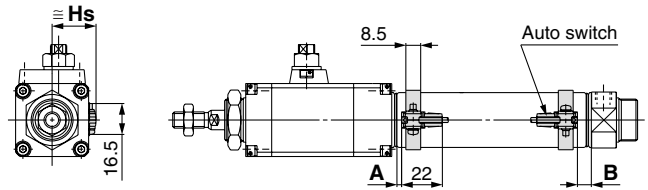


**D-H7**□/H7□W/H7NF/H7BAL

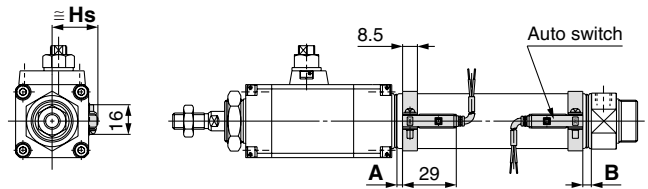


**D-G5NTL**

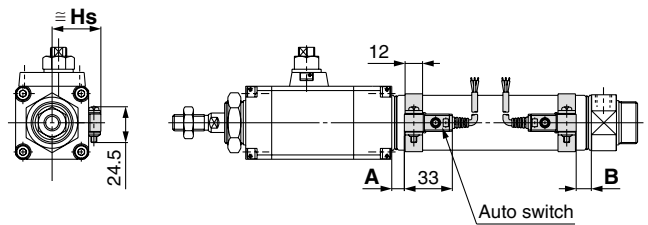

**D-G39A/K39A**

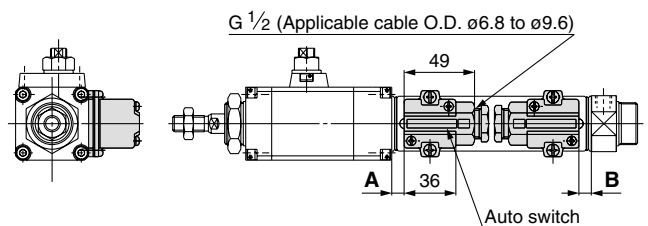

**D-H7C**

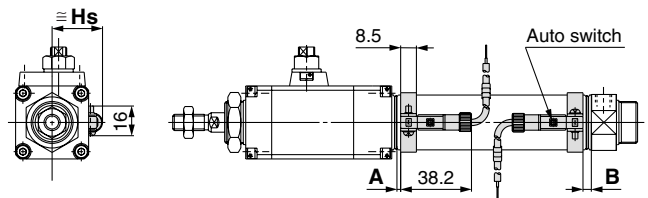

CLJ2

CLM2

CLG1

CL1

MLGC

CNG

MNB

CNA

CNS

CLS

CLQ

RLQ

MLU

MLGP

ML1C

D-□

-X□

Individual

-X□

# Series CLM2

## Auto Switch Proper Mounting Position (Detection at Stroke End) and Its Mounting Height

### Auto Switch Proper Mounting Position

(mm)

Auto switch model	D-A9□		D-M9□ D-M9□W		D-B5□ D-B64		D-C7□ D-C80 D-C73C D-C80C		D-B59W		D-A3□A D-G39A D-K39A D-A44A		D-H7□ D-H7C D-H7□W D-H7BAL D-H7NF		D-G5NTL	
	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B
20	6.5	5.5	10.5	9.5	1	0	7	6	4	3	0.5	0	6	5	2.5	1.5
25	6.5	5.5	10.5	9.5	1	0	7	6	4	3	0.5	0	6	5	2.5	1.5
32	7.5	6.5	11.5	10.5	2	1	8	7	5	4	1.5	0.5	7	6	3.5	2.5
40	13.5	11.5	17.5	15.5	7	6	13	12	10	9	6.5	5.5	12	11	8.5	7.5

Note) Adjust the auto switch after confirming the operating conditions in the actual setting.

### Auto Switch Mounting Height



(mm)

Auto switch model	D-A9□ D-M9□ D-M9□W		D-B5□ D-B64 D-B59W D-G5NTL D-H7C		D-C7□ D-C80 D-H7□ D-H7□W D-H7BAL D-H7NF		D-C73C D-C80C		D-A3□A D-G39A D-K39A		D-A44A	
	Hs		Hs		Hs		Hs		Hs		Hs	
20	22		25.5		22.5		25		60		69.5	
25	24.5		28		25		27.5		62.5		72	
32	28		31.5		28.5		31		66		75.5	
40	32		35.5		32.5		35		70		79.5	

## Minimum Auto Switch Mounting Stroke

Auto switch model	No. of auto switches mounted				
	1	2		n	
		Different surfaces	Same surface	Different surfaces	Same surface
D-A9□ D-M9□ D-M9□W	10	15 Note)	45 Note)	$15 + 45 \frac{(n-2)}{2}$ (n = 2, 4, 6...)	45 + 45 (n - 2)
D-C7□ D-C80	10	15	50	$15 + 45 \frac{(n-2)}{2}$ (n = 2, 4, 6...)	50 + 45 (n - 2)
D-H7□ D-H7□W D-H7BAL/H7NF	10	15	60	$15 + 45 \frac{(n-2)}{2}$ (n = 2, 4, 6...)	60 + 45 (n - 2)
D-C73C D-C80C D-H7C	10	15	65	$15 + 50 \frac{(n-2)}{2}$ (n = 2, 4, 6...)	65 + 50 (n - 2)
D-B5□/B64 D-G5NTL	10	15	75	$15 + 50 \frac{(n-2)}{2}$ (n = 2, 4, 6...)	75 + 55 (n - 2)
D-B59W	15	20	75	$20 + 50 \frac{(n-2)}{2}$ (n = 2, 4, 6...)	75 + 55 (n - 2)
D-A3□A/G39A D-K39A/A44A	10	35	100	35 + 30 (n - 2)	100 + 100 (n - 2)

Note) For cylinders with two of D-A93/M9□/M9□W auto switches

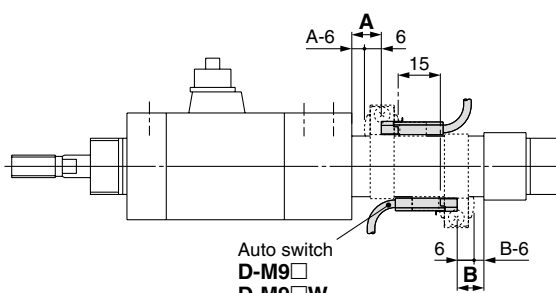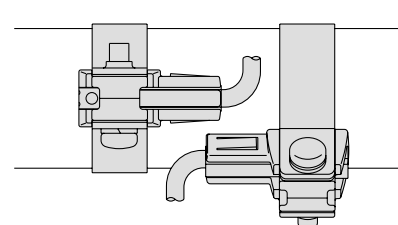Auto switch model	With 2 auto switches	
	Different surfaces	Same surface
 <p>Auto switch D-M9□ D-M9□W</p> <p>The proper auto switch mounting position is 6 mm inward from the switch holder edge.</p>	 <p>The auto switch is mounted by slightly displacing it in a direction (cylinder tube circumferential exterior) so that the auto switch and lead wire do not interfere with each other.</p>	
D-A93	—	Less than 50 strokes
D-M9□ D-M9□W	Less than 20 strokes	Less than 55 strokes

## Operating Range

Auto switch model	Bore size (mm)			
	20	25	32	40
D-A9□	6	6	6	6
D-M9□ D-M9□W	3.5	3	3.5	3
D-C7□/C80 D-C73C/C80C	7	8	8	8
D-B5□/B64 D-A3□A/A44A	8	8	9	9
D-B59W	12	12	13	13
D-H7□/H7□W/H7BAL D-G5NTL/H7NF	4	4	4.5	5
D-H7C	7	8.5	9	10
D-G39A/K39A	8	9	9	9

\* Since the operating range is provided as a guideline including hysteresis, it cannot be guaranteed (assuming approximately ±30% dispersion). It may vary substantially depending on an ambient environment.

# Series CLM2

## Auto Switch Mounting Bracket: Part No.

Auto switch model	Bore size (mm)			
	ø20	ø25	ø32	ø40
D-A9□ D-M9□ D-M9□W	① BM2-020 (1) ② BJ3-1	① BM2-025 (1) ② BJ3-1	① BM2-032 (1) ② BJ3-1	① BM2-040 (1) ② BJ3-1
D-C7□/C80 D-C73C/C80C D-H7□ D-H7□W D-H7BAL D-H7NF	BM2-020	BM2-025	BM2-032	BM2-040
D-B5□/B64 D-B59W D-G5NTL D-G5NBL	BA2-020	BA2-025	BA2-032	BA2-040
D-A3□A/A44A D-G39A/K39A	BM3-020	BM3-025	BM3-032	BM3-040

Note 1) Two kinds of auto switch mounting brackets are used as a set.


### [Mounting screw set made of stainless steel]

The following set of mounting screws made of stainless steel is available. Use it in accordance with the operating environment. (Please order the auto switch mounting bracket separately, since it is not included.)

BBA4: For D-C7/C8/H7 types

Note 2) Refer to page 1814 for the details of BBA4.

D-H7BAL auto switch is set on the cylinder with the stainless steel screws above when shipped. When an auto switch is shipped independently, BBA4 is attached.

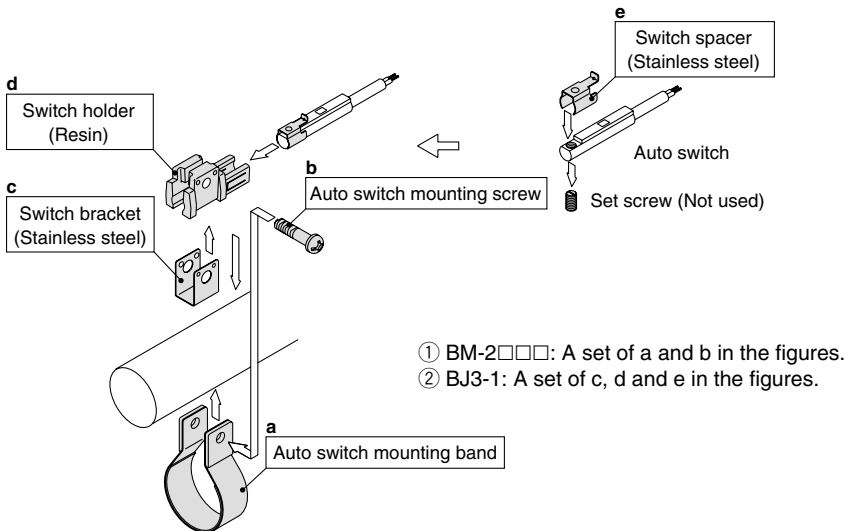

Besides the models listed in How to Order, the following auto switches are applicable. Refer to pages 1719 to 1827 for the detailed specifications.

Auto switch type	Part no.	Electrical entry (Fetching direction)	Features
Reed	D-B53, C73, C76	Grommet (In-line)	—
	D-C80		Without indicator light
Solid state	D-H7A1, H7A2, H7B		—
	D-H7NW, H7PW, H7BW		Diagnostic indication (2-color)
	D-G5NTL		With timer

\* For solid state auto switches, auto switches with a pre-wired connector are also available. Refer to pages 1784 and 1785 for details.

\* Normally closed (NC = b contact) solid state auto switches (D-F9G/F9H types) are also available. Refer to page 1746 for details.

\* Wide range detection type, solid state auto switches (D-G5NBL type) are also available. Refer to page 1776 for details.

# Fine Lock Cylinder

## Double Acting, Single Rod

# Series CLG1

ø20, ø25, ø32, ø40

### How to Order

**CLG1 L N 25 - 100 - E -**

**With auto switch** **CDLG1 L N 25 - 100 - E - M9BW -**

**With auto switch**  
(Built-in magnet)

**Mounting style**

<b>B</b>	Basic style
<b>L</b>	Axial foot style
<b>F</b>	Rod side flange style
<b>G</b>	Head side flange style
<b>U</b>	Rod side trunnion style
<b>T</b>	Head side trunnion style
<b>D</b>	Clevis style

**Type**

<b>N</b>	Non-lube/Rubber bumper
<b>A</b>	Non-lube/Air cushion

**Bore size**

<b>20</b>	20 mm
<b>25</b>	25 mm
<b>32</b>	32 mm
<b>40</b>	40 mm

**Port thread type**

<b>Nil</b>	Rc
<b>TN</b>	NPT

**Cylinder stroke (mm)**

Bore size (mm)	Standard stroke (mm)	Long stroke (mm)
20	25, 50, 75, 100, 125, 150, 200	201 to 350
25	25, 50, 75, 100, 125, 150, 200, 250, 300	301 to 400
32	125, 150, 200, 250, 300	301 to 450
40		301 to 800

**Number of auto switches**

<b>Nil</b>	2 pcs.
<b>S</b>	1 pc.
<b>n</b>	"n" pcs.

**Auto switch**

<b>Nil</b>	Without auto switch
------------	---------------------

\* For the applicable auto switch model, refer to the table below.

**Lock operation**

<b>E</b>	Spring locking (Exhaust locking)
<b>P</b>	Pneumatic locking (Pressure locking)
<b>D</b>	Spring and pneumatic locking

**Auto switch**  
Made to Order  
Refer to page 626 for details.

**Cylinder symbol**

<b>Nil</b>	Without rod boot
<b>J</b>	Nylon tarpaulin
<b>K</b>	Heat resistant tarpaulin

#### Built-in Magnet Cylinder Model

If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch.  
(Example) CDLG1FA32-100-P

#### Applicable Auto Switch/Refer to pages 1719 to 1827 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model	Lead wire length (m)					Pre-wired connector	Applicable load				
					DC	AC		0.5 (Nil)	1 (M)	3 (L)	5 (Z)	None (N)		IC circuit	Relay, PLC			
Solid state switch	—	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	<b>M9N</b>	●	●	●	○	—	○	IC circuit	Relay, PLC		
				3-wire (PNP)				<b>M9P</b>	●	●	●	○	—	○				
		Connector	2-wire	12 V	<b>M9B</b>	●	●	●	○	—	○	—						
	Diagnostic indication (2-color indication)	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	<b>M9NW</b>	●	●	●	○	—	○	IC circuit			
				3-wire (PNP)				<b>M9PW</b>	●	●	●	○	—	○	—			
		Connector	2-wire	12 V	<b>M9BW</b>	●	●	●	○	—	○	—						
		Water resistant (2-color indication)	Grommet	Yes	4-wire (NPN)	24 V	5 V, 12 V	—	<b>H7C</b>	●	—	●	●	●	—		—	
With diagnostic output (2-color indication)	<b>H7NF</b>	●			—				●	○	—	○	—	○	IC circuit			
Reed switch	—	Grommet	Yes	3-wire (NPN equivalent)	24 V	12 V	—	<b>A96</b>	●	—	●	—	—	—	—			
				Connector				2-wire	100 V	<b>A93</b>	●	—	●	—	—	—	—	—
									100 V or less	<b>A90</b>	●	—	●	—	—	—	—	IC circuit
		100 V, 200 V	<b>B54</b>		●	—	●		●	—	—	—	—					
		200 V or less	<b>B64</b>		●	—	●		—	—	—	—	—					
		Diagnostic indication (2-color indication)	Grommet	Yes	2-wire	24 V	—	—	<b>C73C</b>	●	—	●	●	●	—	—		
									<b>C80C</b>	●	—	●	●	●	—	—	—	IC circuit
							<b>B59W</b>	●	—	●	—	—	—	—	—			

\* Lead wire length symbols: 0.5 m ..... Nil (Example) M9NW  
 1 m ..... M (Example) M9NWM  
 3 m ..... L (Example) M9NWL  
 5 m ..... Z (Example) M9NWZ  
 None ..... N (Example) H7CN

\* Solid state auto switches marked with "○" are produced upon receipt of order.  
 \* D-A9□/M9□/M9□WV/M9□A(V)L types cannot be mounted.

\* Since there are other applicable auto switches than listed above, refer to page 635 for details.  
 \* For details about auto switches with pre-wired connector, refer to pages 1784 and 1785.  
 \* D-A9□/M9□/□W auto switches are shipped together (not assembled). (Only auto switch mounting brackets are assembled at the time of shipment.)

CLJ2

CLM2

CLG1

CL1

MLGC

CNG

MNB

CNA

CNS

CLS

CLQ

RLQ

MLU

MLGP

ML1C

D-□

-X□

Individual

-X□

# Series CLG1


**Provided with a compact lock mechanism, it is suitable for intermediate stop, emergency stop, and drop prevention.**

## Locking in both directions

The piston rod can be locked in either direction of its cylinder stroke.

## Maximum piston speed: 500 mm/s

It can be used at 50 to 500 mm/s provided that it is within the allowable kinetic energy range.

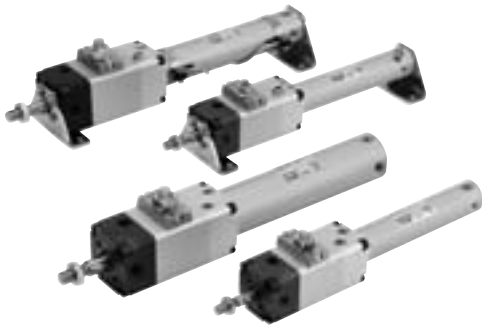

**Made to Order Specifications**  
(For details, refer to page 1836.)

Symbol	Specifications
—XA□	Change of rod end shape

## Mass

(kg)

Bore size (mm)		20	25	32	40
Basic mass	Basic style	0.61	0.97	1.06	1.35
	Axial foot style	0.72	1.10	1.22	1.57
	Flange style	0.73	1.15	1.23	1.58
	Trunnion style	0.62	0.99	1.09	1.40
	Clevis style	0.66	1.05	1.21	1.58
Rod side pivot bracket		0.11	0.13	0.20	0.27
Head side pivot bracket		0.08	0.09	0.17	0.25
Single knuckle joint		0.05	0.09	0.09	0.10
Double knuckle joint (with pin)		0.05	0.09	0.09	0.13
Additional mass per each 50 mm of stroke		0.05	0.07	0.09	0.15
Additional mass with air cushion		0.01	0.01	0.02	0.02
Additional mass for long stroke		0.01	0.01	0.02	0.03

Calculation: (Example)

**CLG1LA20-100** (Foot Style, ø20, 100 st)

- Basic mass..... 0.72
  - Additional mass..... 0.05/50 st
  - Air cylinder stroke..... 100 st
  - Additional mass of air cushion..... 0.01 kg
- $$0.72 + 0.05 \times 100/50 + 0.01 = 0.83 \text{ kg}$$

## Model

Series	Type	Action	Cushion	Bore size (mm)	Lock operation
CLG1□N	Non-lube	Double acting	Rubber bumper	20, 25	Spring locking (Exhaust locking) Pneumatic locking (Pressure locking) Spring and pneumatic locking
CLG1□A			Air cushion	32, 40	

## Specifications

Bore size (mm)	20	25	32	40
Fluid	Air			
Proof pressure	1.5 MPa			
Maximum operating pressure	1 MPa			
Minimum operating pressure	0.08 MPa			
Ambient and fluid temperature	Without auto switch: -10 to 70°C (No freezing) With auto switch: -10 to 60°C (No freezing)			
Piston speed	50 to 500 mm/sec *			
Stroke length tolerance	Up to 1000 st $+1.4$ mm to st $+0.8$ mm			
Cushion	Rubber bumper, Air cushion			
Mounting **	Basic style, Axial foot style, Rod side flange style, Head side flange style, Rod side trunnion style, Head side trunnion style, Clevis style (Used when port position is changed to 90°.)			

\* Constraints associated with the allowable kinetic energy are imposed on the speeds at which the piston can be locked.

The maximum speed of 1000 mm/s can be accommodated if the piston is to be locked in the stationary state for the purpose of drop prevention.

\*\* The long stroke style is applicable to the axial foot style, and the rod side flange style.

## Fine Lock Specifications

Lock operation	Spring locking (Exhaust locking)	Spring and pneumatic locking	Pneumatic locking (Pressure locking)
Fluid	Air		
Maximum operating pressure	0.5 MPa		
Unlocking pressure	0.3 MPa or more	0.1 MPa or more	
Lock starting pressure	0.25 MPa or less	0.05 MPa or more	
Locking direction	Both directions		

## Accessory

Mounting		Basic style	Axial foot style	Rod side flange style	Head side flange style	Rod side trunnion style	Head side trunnion style	Clevis style
Standard equipment	Rod end nut	●	●	●	●	●	●	●
	Clevis pin	—	—	—	—	—	—	●
Option	Single knuckle joint	●	●	●	●	●	●	●
	Double knuckle joint* (With pin)	●	●	●	●	●	●	●
	Pivot bracket	—	—	—	—	●	●	●
	Rod boot	●	●	●	●	●	●	●

\* Pins and retaining rings are shipped together with double knuckle joints.

## Standard Stroke

Refer to the minimum auto switch mounting stroke (page 634) for those with an auto switch.

Bore size (mm)	Standard stroke (mm)	Long stroke (mm)	Maximum manufacturable stroke (mm)
20	25, 50, 75, 100, 125, 150, 200	201 to 350	1500
25	25, 50, 75, 100, 125, 150, 200,	301 to 400	
32	250, 300	301 to 450	
40		301 to 800	

\* Intermediate stroke is available, too. Spacers are not used.

\* Long strokes are applicable for the axial foot and rod side flange styles. If other mounting brackets are used or the length exceeds the long stroke limit, the maximum stroke should be determined based on the stroke selection table (technical data).

Refer to pages 633 to 635 for cylinders with auto switches.
<ul style="list-style-type: none"> <li>• Minimum auto switch mounting stroke</li> <li>• Proper auto switch mounting position (detection at stroke end) and mounting height</li> <li>• Operating range</li> <li>• Switch mounting bracket: Part no.</li> </ul>

## Rod Boot Material

Symbol	Rod boot material	Maximum ambient temperature
J	Nylon tarpaulin	70°C
K	Heat resistant tarpaulin	110°C *


\* Maximum ambient temperature for the rod boot itself.



## ⚠ Caution/Allowable Kinetic Energy when Locking

Bore size (mm)	20	25	32	40
Allowable kinetic energy (J)	0.26	0.42	0.67	1.19

- In terms of specific load conditions, the allowable kinetic energy indicated in the table above is equivalent to a 50% load ratio at 0.5 MPa, and a piston speed of 300 mm/sec. Therefore, if the operating conditions are below these values, calculations are unnecessary.
- Apply the following formula to obtain the kinetic energy of the load.
 
$$E_k = \frac{1}{2} m v^2$$
 Ek: Kinetic energy of load (J)  
 m: Load mass (kg)  
 v: Piston speed (m/s) (Average speed x 1.2 times)
- The piston speed will exceed the average speed immediately before locking. To determine the piston speed for the purpose of obtaining the kinetic energy of load, use 1.2 times the average speed as a guide.
- The relation between the speed and the load of the respective tube bores is indicated in the diagram below. Use the cylinder in the range below the line.
- During locking, the lock mechanism must sustain the thrust of the cylinder itself, in addition to absorbing the energy of the load. Therefore, even within a given allowable kinetic energy level, there is an upper limit to the size of the load that can be sustained. Thus, a horizontally mounted cylinder must be operated below the solid line, and a vertically mounted cylinder must be operated below the dotted line.

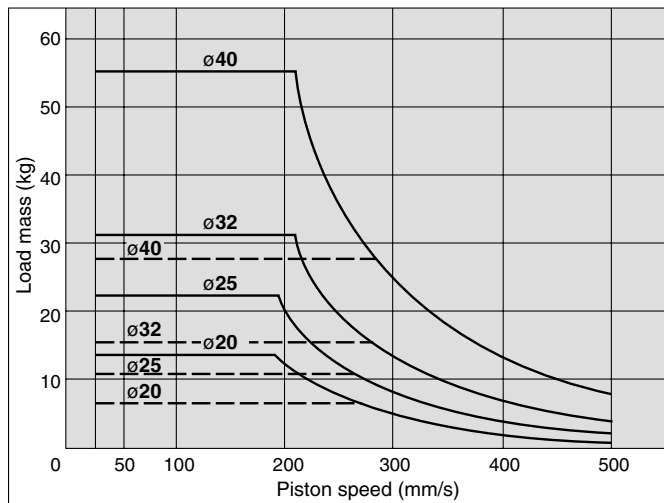


## Holding Force of Spring Locking (Maximum static load)

Bore size (mm)	20	25	32	40
Holding force (N)	196	313	443	784

Note) Holding force at piston rod extended side decreases approximately 15%.

## Holding Force of Pneumatic Locking (Maximum static load)

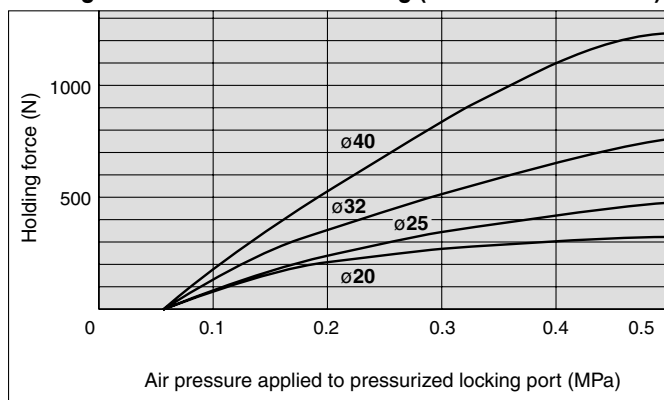

\* When selecting cylinders, refer to the Precautions and allowable kinetic energy when locking on page 596, and then select a cylinder.

## ⚠ Caution

### Caution when Locking

Holding force is the force which can hold a static load given no vibration or impact, in a locked state. Therefore, do not use cylinders around the maximum holding force. Note the following points.

- If the piston rod slips because the lock's holding force has been exceeded, the brake shoe could be damaged, resulting in a reduced holding force or shortened life.
- To use the lock for drop prevention purposes, the load to be attached to the cylinder must be within 35% of the cylinder's holding force.
- Do not use the cylinder in the locked state to sustain a load that involves impact.

## Stopping Accuracy (Not including tolerance of control system.) (mm)

Locking method	Piston speed (mm/s)			
	50	100	300	500
Spring locking (Exhaust locking)	±0.4	±0.5	±1.0	±2.0
Pneumatic locking (Pressure locking) Spring and pneumatic locking	±0.2	±0.3	±0.5	±1.5

Condition/load: 25% of thrust force at 0.5 MPa Solenoid valve: Mounted to the lock port

## ⚠ Caution

### Recommended Pneumatic Circuit/Caution on Handling

For detailed specifications of the fine lock cylinder, Series CLG1 mentioned above, refer to pages 596 to 599.

## Mounting Bracket Part No.

Mounting bracket	Bore size (mm)			
	20	25	32	40
Axial foot *	CNG-L020	CNG-L025	CNG-L032	CNG-L040
Flange	CNG-F020	CNG-F025	CNG-F032	CNG-F040
Trunnion pin	CG-T020	CG-T025	CG-T032	CG-T040
Clevis **	CG-D020	CG-D025	CG-D032	CG-D040
Rod side pivot bracket	CNG-020-24	CNG-025-24	CNG-032-24	CNG-040-24
Head side pivot bracket	CG-020-24A	CG-025-24A	CG-032-24A	CG-040-24A

\* When ordering foot bracket, order 2 pieces per cylinder.

\*\* For the clevis style, clevis pins, retaining rings and mounting bolts are included.

\*\*\* Mounting bolts are shipped together for the foot and flange styles.

CLJ2

CLM2

CLG1

CL1

MLGC

CNG

MNB

CNA

CNS

CLS

CLQ

RLQ

MLU

MLGP

ML1C


D-

-X


Individual  
-X

# Series CLG1

## Basic Style: CLG1BN

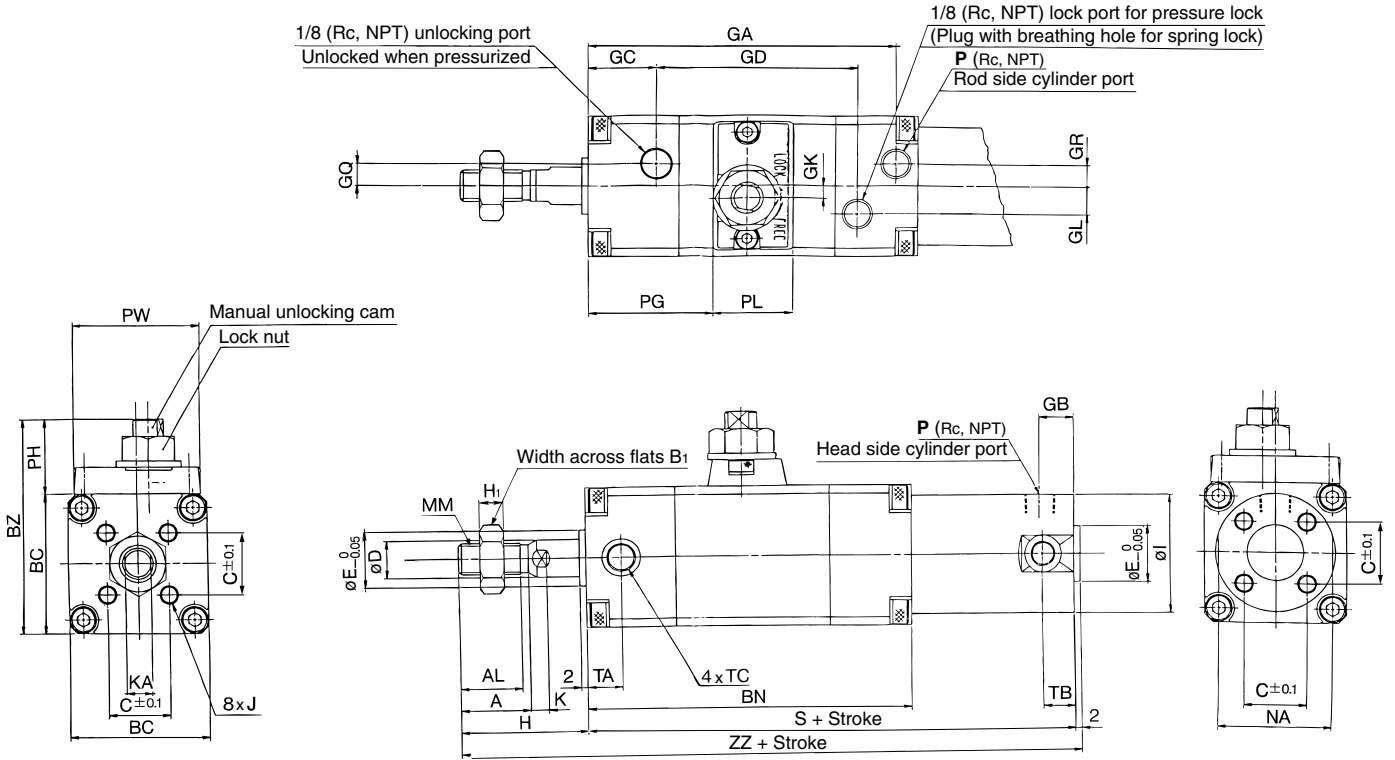

### CLG1 With rod boot (Mounting bracket: Basic style)

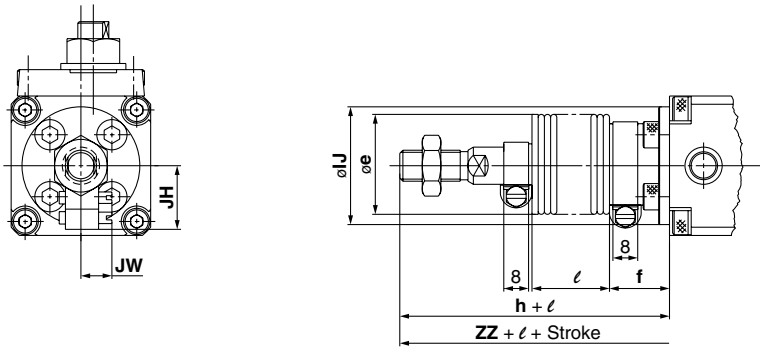

Bore size (mm)	Stroke range	AL	A	B <sub>1</sub>	BC	BN	BZ	C	D	E	GA	GB	GC	GD	GK	GL	GQ	GR	I	J	K	KA	MM
20	Up to 200	15.5	18	13	38	91	57.5	14	8	12	84	10	19	54	3.5	5.5	4	4	26	M4 x 0.7 depth 7	5	6	M8 x 1.25
25	Up to 300	19.5	22	17	45	101	69	16.5	10	14	94	10	20	62	4	9	7	7	31	M5 x 0.8 depth 7.5	5	8	M10 x 1.25
32	Up to 300	19.5	22	17	45	102	69	20	12	18	95	10	21	62	4	9	7	7	38	M5 x 0.8 depth 8	5.5	10	M10 x 1.25
40	Up to 300	27	30	19	52	111	76	26	16	25	103	10	23	67	4	11	8	8	47	M6 x 1 depth 12	6	14	M14 x 1.5


Bore size (mm)	Stroke range	H <sub>1</sub>	NA	P	PG	PH	PL	PW	S	TA	TB	TC	Without rod boot		With rod boot							
													H	ZZ	IJ	JH (Reference)	JW (Reference)	e	f	h	ℓ	ZZ
20	Up to 200	5	24	1/8	33	19.5	20	38	141	11	11	M5 x 0.8	35	178	27	15.5	10.5	30	18	55	0.25 x Stroke	198 (206)
25	Up to 300	6	29	1/8	38	24	24	41	151	11	11	M6 x 0.75	40	193	32	16.5	10.5	30	19	62		215 (223)
32	Up to 300	6	35.5	1/8	39	24	24	41	154	11	10	M8 x 1	40	196	38	18.5	10.5	35	19	62		218 (226)
40	Up to 300	8	44	1/8	44	24	24	41	169	12	10	M10 x 1.25	50	221	48	21.5	10.5	35	19	70		241 (250)

\* For long stroke refer to page 630.  
\*\* The minimum stroke for cylinders with a rod boot is 20 mm.

# Fine Lock Cylinder Double Acting, Single Rod *Series CLG1*

## With Mounting Bracket

### Foot style: CLG1LN

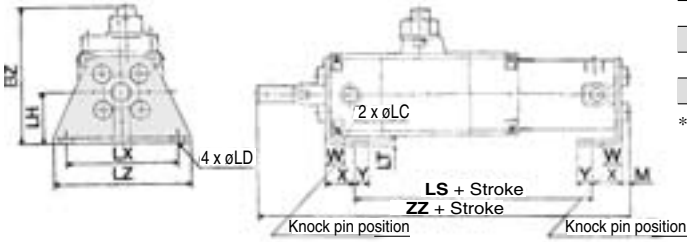


### Foot Style


Bore size (mm)	BZ	M	W	X	Y	LC	LD	LH	LS	LT	LX	LZ	Without rod boot	With rod boot
	ZZ													
20	63.5	3	10	15	7	4	6	25	117	3	50	62	182	202
25	74.5	3.5	10	15	7	4	6	28	127	3	57	70	197.5	219.5
32	74.5	3.5	10	16	8	4	7	28	128	3	60	74	200.5	222.5
40	83	4	10	16.5	8.5	4	7	33	142	3	68	84	226	246

\* For long stroke, refer to page 630.

### Rod side flange style: CLG1FN



### Head side flange style: CLG1GN

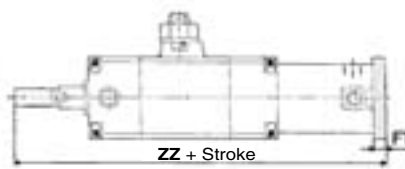

### Rod Side Flange Style


Bore size (mm)	B	BZ	FD	FT	FX	FY	FZ
	ZZ						
20	38	57.5	5.5	6	52	25	65
25	45	69	5.5	7	60	30	75
32	45	69	6.6	7	60	30	75
40	52	76	6.6	8	66	36	82

\* For long stroke, refer to page 630.

### Head Side Flange Style

Bore size (mm)	Without rod boot	With rod boot
	ZZ	
20	182	202
25	198	220
32	201	223
40	227	247


### Rod side trunnion style: CLG1UN

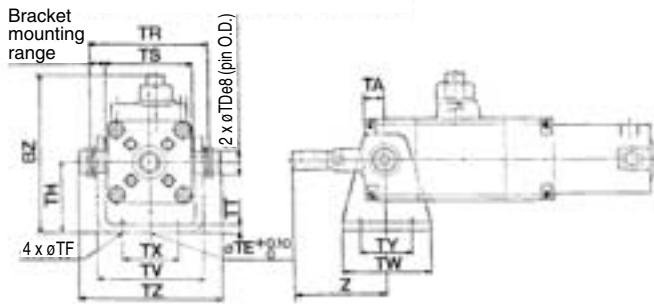

### Rod Side Trunnion Style

Bore size (mm)	BZ	TDe8	TE	TF	TH	TR	TS	TT	TV	TW	TX	TY	TZ	Without rod boot	With rod boot
	Z														
20	69.5	8 <sup>-0.025</sup> <sub>-0.047</sub>	10	5.5	31	51	40	3.2	47.8	42	26	28	59.6	46	66
25	83.5	10 <sup>-0.025</sup> <sub>-0.047</sub>	10	5.5	37	58	47	3.2	54.8	42	28	28	68	51	73
32	85	12 <sup>-0.032</sup> <sub>-0.059</sub>	10	6.6	38.5	62.5	47	4.5	57.4	48	28	28	75.7	51	73
40	92.5	14 <sup>-0.032</sup> <sub>-0.059</sub>	10	6.6	42.5	72.5	54	4.5	65.4	56	36	30	85.7	62	82


### Head side trunnion style: CLG1TN

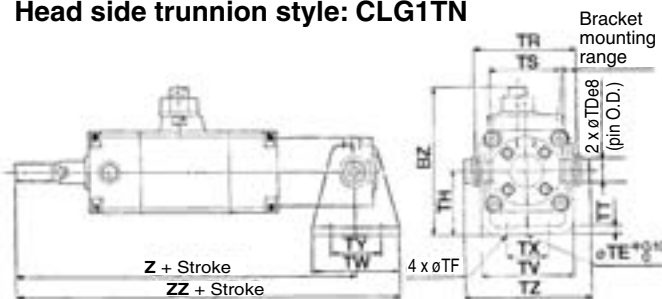

### Head Side Trunnion Style

Bore size (mm)	BZ	TDe8	TE	TF	TH	TR	TS	TT	TV	TW	TX	TY	TZ	Without rod boot	With rod boot
	Z														
20	63.5	8 <sup>-0.025</sup> <sub>-0.047</sub>	10	5.5	25	39	28	3.2	35.8	42	16	28	47.6	165	186
25	76.5	10 <sup>-0.025</sup> <sub>-0.047</sub>	10	5.5	30	43	33	3.2	39.8	42	20	28	53	180	202
32	81.5	12 <sup>-0.032</sup> <sub>-0.059</sub>	10	6.6	35	54.5	40	4.5	49.4	48	22	28	67.7	184	206
40	90	14 <sup>-0.032</sup> <sub>-0.059</sub>	10	6.6	40	65.5	49	4.5	58.4	56	30	30	78.7	209	237

### Clevis style: CLG1DN

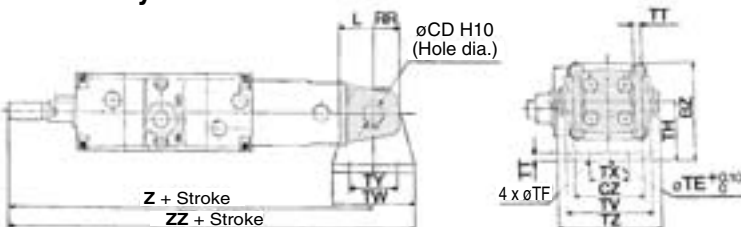

### Clevis Style

Bore size (mm)	BZ	CD <sub>H10</sub>	CZ	L	RR	TE	TF	TH	TT	TV	TW	TX	TY	TZ
	Z													
20	44	8 <sup>-0.058</sup> <sub>0</sub>	29	14	11	10	5.5	25	3.2	35.8	42	16	28	43.4
25	52.5	10 <sup>-0.058</sup> <sub>0</sub>	33	16	13	10	5.5	30	3.2	39.8	42	20	28	48
32	57.5	12 <sup>-0.070</sup> <sub>0</sub>	40	20	15	10	6.6	35	4.5	49.4	48	22	28	59.4
40	66	14 <sup>-0.070</sup> <sub>0</sub>	49	22	18	10	6.6	40	4.5	58.4	56	30	30	71.4

Bore size (mm)	Without rod boot	With rod boot
	Z	ZZ
20	190	211
25	207	228
32	214	238
40	241	269

\* Clevis pin and retaining ring are attached.

CLJ2

CLM2

CLG1

CL1

MLGC

CNG

MNB

CNA

CNS

CLS

CLQ

RLQ

MLU

MLGP

ML1C

D-□


-X□

Individual -X□


# Series CLG1

## Basic Style with Air Cushion: CLG1BA

\* Refer to page 629 for mounting bracket, since the dimensions except GA, P, WA, WB, WH, WW, Wθ are the same.

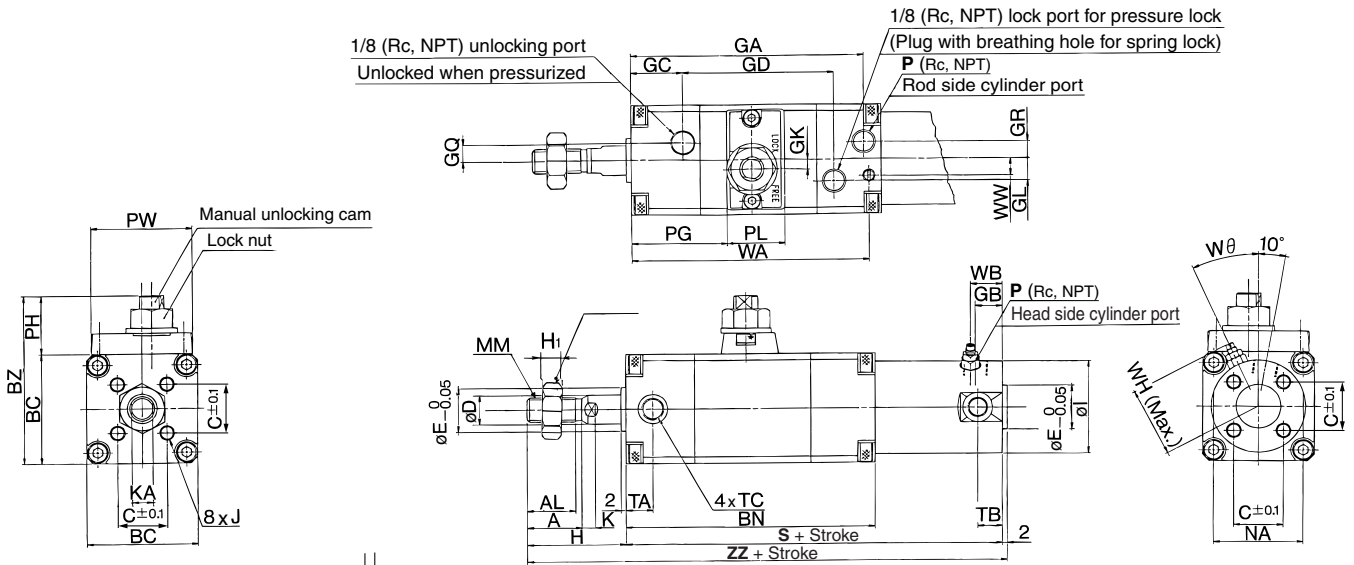

### CLG1 With rod boot (Mounting bracket: Basic style)

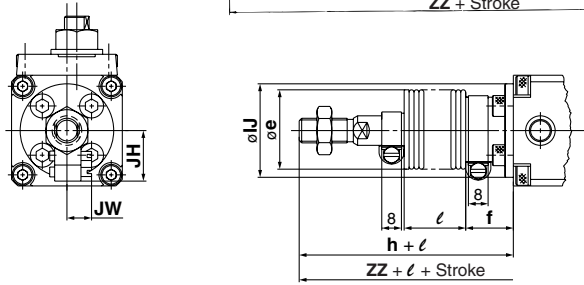


Bore size (mm)	Stroke range	AL	A	B1	BC	BN	BZ	C	D	E	GA	GB	GC	GD	GK	GL	GQ	GR	I	J	K	KA	MM	NA	H1
20	Up to 200	15.5	18	13	38	91	57.5	14	8	12	85	10	19	54	3.5	5.5	4	4	26	M4 x 0.7 depth 7	5	6	M8 x 1.25	24	5
25	Up to 300	19.5	22	17	45	101	69	16.5	10	14	95	10	20	62	4	9	7	7	31	M5 x 0.8 depth 7.5	5.5	8	M10 x 1.25	29	6
32	Up to 300	19.5	22	17	45	102	69	20	12	18	95	10	21	62	4	9	7	7	38	M5 x 0.8 depth 8	5.5	10	M10 x 1.25	35.5	6
40	Up to 300	27	30	19	52	111	76	26	16	25	103	10	23	67	4	11	8	7	47	M6 x 1 depth 12	6	14	M14 x 1.5	44	8

Bore size (mm)	Stroke range	P	PG	PH	PL	PW	S	TA	TB	TC	WA	WW	WB	WH	Wθ	Without rod boot		With rod boot									
																H	ZZ	IJ	JH (Reference)	JW (Reference)	e	f	h	l	ZZ		
20	Up to 200	M5 x 0.8	33	19.5	20	38	141	11	11	M5 x 0.8	86	5.5	15	23	30°	35	178	27	15.5	10.5	30	18	55		198 (206)		
25	Up to 300	M5 x 0.8	38	24	24	41	151	11	11	M6 x 0.75	96	6	15	25	30°	40	193	32	16.5	10.5	30	19	62	0.25 x Stroke	215 (223)		
32	Up to 300	1/8	39	24	24	41	154	11	10	M8 x 1	97	6	15	28.5	25°	40	196	38	18.5	10.5	35	19	62		218 (226)		
40	Up to 300	1/8	44	24	24	41	169	12	10	M10 x 1.25	106	8	15	33	20°	50	221	48	21.5	10.5	35	19	70		241 (250)		

\* The minimum stroke for cylinders with a rod boot is 20 mm.


### Long Stroke/Refer to pages 628 to 630 for mounting dimensions except the table below.

#### Basic style

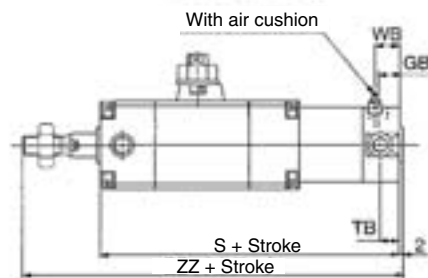


Bore size (mm)	Stroke range	GB	S	Without rod boot		TB	WB
				ZZ	ZZ		
20	201 to 350	12	149	186	206	11	16
25	301 to 400	12	159	201	223	11	16
32	301 to 450	12	162	204	226	11	16
40	301 to 800	13	178	230	250	12	16

#### Foot style

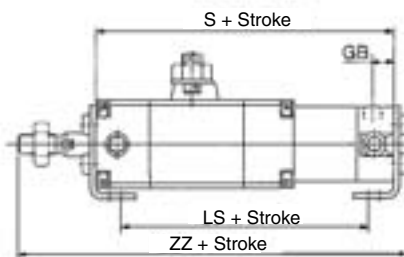

Bore size (mm)	Stroke range	GB	S	LS	Without rod boot		With rod boot
					ZZ	ZZ	
20	201 to 350	12	149	125	190	210	
25	301 to 400	12	159	135	205.5	227.5	
32	301 to 450	12	162	136	208.5	230.5	
40	301 to 800	13	178	151	235	255	


#### Rod side flange style

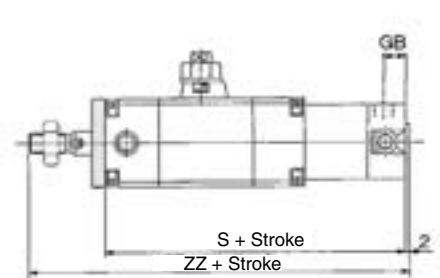


Bore size (mm)	Stroke range	GB	S	Without rod boot		With rod boot
				ZZ	ZZ	
20	201 to 350	12	149	186	206	
25	301 to 400	12	159	201	223	
32	301 to 450	12	162	204	226	
40	301 to 800	13	178	230	250	

## Construction

### With rubber bumper: CLG1BN

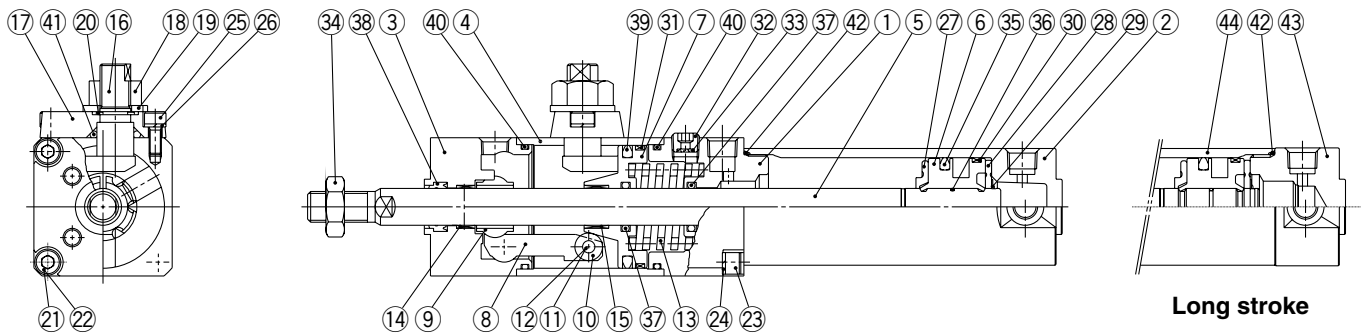

### With air cushion: CLG1BA

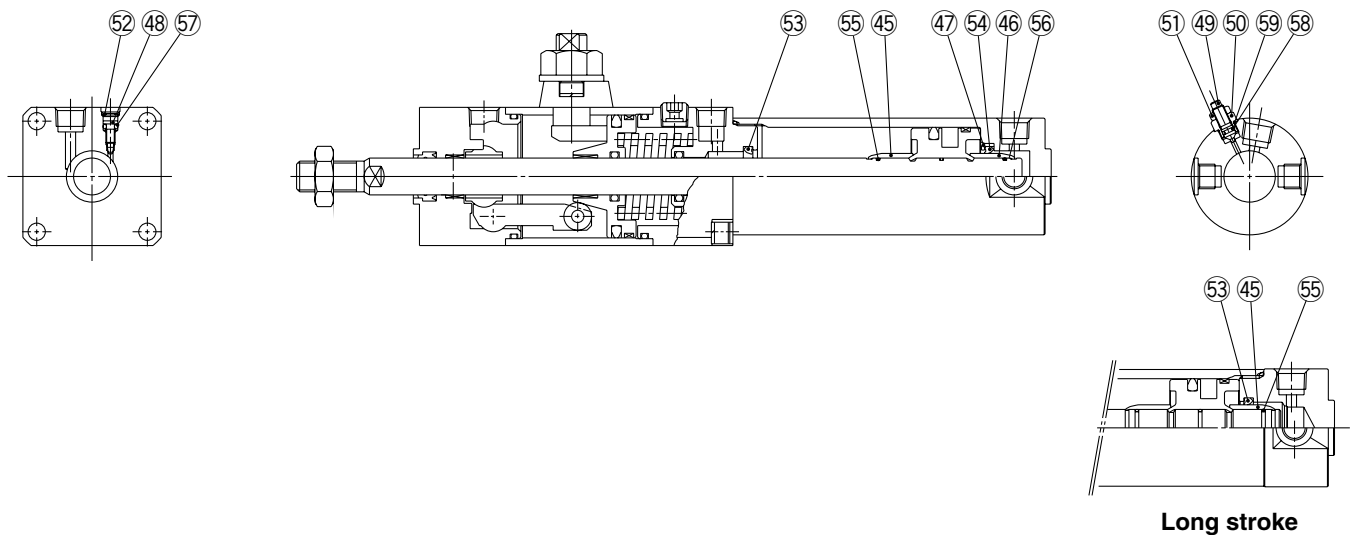

### Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Clear hard anodized
2	Tube cover	Aluminum alloy	Hard anodized
3	Cover	Carbon steel	Nitrided
4	Intermediate cover	Aluminum alloy	Clear hard anodized
5	Piston rod	Carbon steel	Hard chromated
6	Piston	Aluminum alloy	Chromated
7	Brake piston	Carbon steel	Nitrided
8	Brake arm	Carbon steel	Nitrided
9	Brake shoe	Special friction material	
10	Roller	Carbon steel	Nitrided
11	Pin	Carbon steel	Heat treated
12	Retaining ring	Stainless steel	
13	Brake spring	Spring steel wire	Dacrodized: Types C, E only
14	Bushing	Oil-impregnated sintered alloy	
15	Bushing	Oil-impregnated sintered alloy	
16	Manual lock release cam	Chromium molybdenum steel	Nitrided, nickel plated
17	Cam guide	Carbon steel	Nitrided, painted
18	Lock nut	Rolled steel	Nickel plated
19	Flat washer	Rolled steel	Nickel plated
20	Retaining ring	Stainless steel	
21	Hexagon socket head cap screw	Chromium molybdenum steel	Nickel plated
22	Spring washer	Steel wire	Nickel plated
23	Hexagon socket head cap screw	Chromium molybdenum steel	Nickel plated
24	Spring washer	Steel wire	Nickel plated
25	Hexagon socket head cap screw	Chromium molybdenum steel	Nickel plated
26	Spring washer	Steel wire	Nickel plated
27	Bumper A	Urethane	
28	Bumper B	Urethane	
29	Retaining ring	Stainless steel	
30	Wear ring	Resin	

No.	Description	Material	Note
31	Wear ring	Resin	
32	Hexagon socket head plug	Carbon steel	Nickel plated type E only
33	Element	Bronze	Type E only
34	Rod end nut	Rolled steel	Nickel plated
35	Piston seal	NBR	
36	Piston gasket	NBR	
37	Rod seal A	NBR	
38	Rod seal B	NBR	
39	Brake piston seal	NBR	
40	Intermediate cover gasket	NBR	
41	Cam gasket	NBR	
42	Cylinder tube gasket	NBR	
43	Head cover	Aluminum alloy	Clear hard anodized
44	Cylinder tube	Aluminum alloy	Hard anodized
45	Cushion ring A	Brass	
46	Cushion ring B	Brass	
47	Seal retaining	Rolled steel	Zinc chromated
48	Cushion valve A	Chromium molybdenum steel	Electroless nickel plated
49	Cushion valve B	Rolled steel	Electroless nickel plated
50	Valve retaining	Rolled steel	Electroless nickel plated
51	Lock nut	Rolled steel	Electroless nickel plated
52	Retaining ring	Stainless steel	
53	Cushion seal A	Urethane	
54	Cushion seal B	Urethane	
55	Cushion ring gasket A	NBR	
56	Cushion ring gasket B	NBR	
57	Valve seal A	NBR	
58	Valve seal B	NBR	
59	Valve retaining gasket	NBR	

CLJ2

CLM2

CLG1

CL1

MLGC

CNG

MNB

CNA

CNS

CLS

CLQ

RLQ

MLU

MLGP

ML1C

D-□

-X□

Individual  
-X□


# Series CLG1

# Accessory Bracket Dimensions

## Single Knuckle Joint


### I-G02/G03

Material: Rolled steel



### I-G04

Material: Cast iron




Part no.	Applicable bore size (mm)	A	A1	E1	L1	MM	R1	U1	NDH10	NX
I-G02	20	34	8.5	□16	25	M8 x 1.25	10.3	11.5	8 <sup>+0.058</sup> <sub>0</sub>	8 <sup>-0.2</sup> <sub>-0.4</sub>
I-G03	25, 32	41	10.5	□20	30	M10 x 1.25	12.8	14	10 <sup>+0.058</sup> <sub>0</sub>	10 <sup>-0.2</sup> <sub>-0.4</sub>
I-G04	40	42	14	∅22	30	M14 x 1.5	12	14	10 <sup>+0.058</sup> <sub>0</sub>	18 <sup>-0.3</sup> <sub>-0.5</sub>

## Double Knuckle Joint \* Knuckle pin and retaining ring are packaged.


### Y-G02/G03

Material: Rolled steel



### Y-G04

Material: Cast iron

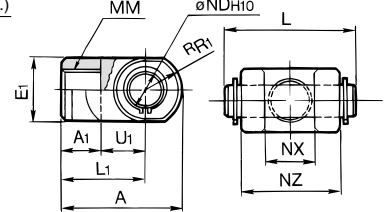


Part no.	Applicable bore size (mm)	A	A1	E1	L1	MM	R1	U1	NDH10	NX	NZ	L	Applicable pin part no.
Y-G02	20	34	8.5	□16	25	M8 x 1.25	10.3	11.5	8 <sup>+0.058</sup> <sub>0</sub>	8 <sup>+0.4</sup> <sub>+0.2</sub>	16	21	IY-G02
Y-G03	25, 32	41	10.5	□20	30	M10 x 1.25	12.8	14	10 <sup>+0.058</sup> <sub>0</sub>	10 <sup>+0.4</sup> <sub>+0.2</sub>	20	25.6	IY-G03
Y-G04	40	42	16	∅22	30	M14 x 1.5	12	14	10 <sup>+0.058</sup> <sub>0</sub>	18 <sup>+0.5</sup> <sub>+0.3</sub>	36	41.6	IY-G04

## Rod Side Pivot Bracket

### ∅20 to ∅40

Material: Rolled steel

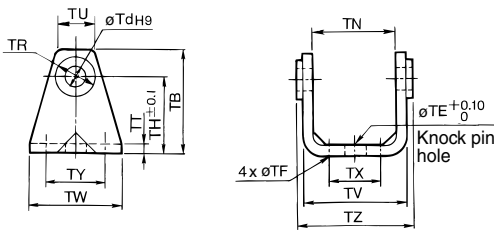


Part no.	Applicable bore size (mm)	TB	TdH9	TE	TF	TH	TN
CNG-020-24	20	42	8 <sup>+0.036</sup> <sub>0</sub>	10	5.5	31	40
CNG-025-24	25	48	10 <sup>+0.036</sup> <sub>0</sub>	10	5.5	37	47
CNG-032-24	32	53	12 <sup>+0.043</sup> <sub>0</sub>	10	6.6	38.5	47
CNG-040-24	40	60	14 <sup>+0.043</sup> <sub>0</sub>	10	6.6	42.5	55

Part no.	Applicable bore size (mm)	TR	TT	TU	TV	TW	TX	TY	TZ
CNG-020-24	20	13	3.2	21.2	47.8	42	26	28	50
CNG-025-24	25	15	3.2	21.3	54.8	42	28	28	57
CNG-032-24	32	17	4.5	25.6	57.4	48	28	28	61.4
CNG-040-24	40	21	4.5	26.3	65.4	56	36	30	71.4

## Head Side Pivot Bracket

### ∅20 to ∅40

Material: Rolled steel

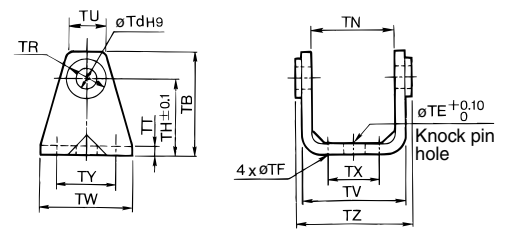


Part no.	Applicable bore size (mm)	TB	Td	TE	TF	TH	TN
CG-020-24A	20	36	8	10	5.5	25	(29.3)
CG-025-24A	25	43	10	10	5.5	30	(33.1)
CG-032-24A	32	50	12	10	6.6	35	(40.4)
CG-040-24A	40	58	14	10	6.6	40	(49.2)

Part no.	Applicable bore size (mm)	TR	TT	TU	TV	TW	TX	TY	TZ
CG-020-24A	20	13	3.2	18.1	35.8	42	16	28	38.3
CG-025-24A	25	15	3.2	20.7	39.8	42	20	28	42.1
CG-032-24A	32	17	4.5	23.6	49.4	48	22	28	53.8
CG-040-24A	40	21	4.5	27.3	58.4	56	30	30	64.6

## Knuckle Pin

Material: Carbon steel




Part no.	Applicable bore size (mm)	Dd9	L	d	l	m	t	Applicable retaining ring
IY-G02	20	8 <sup>-0.040</sup> <sub>-0.076</sub>	21	7.6	16.2	1.5	0.9	Type C 8 for axis
IY-G03	25, 32	10 <sup>-0.040</sup> <sub>-0.076</sub>	25.6	9.6	20.2	1.55	1.15	Type C 10 for axis
IY-G04	40	10 <sup>-0.040</sup> <sub>-0.076</sub>	41.6	9.6	36.2	1.55	1.15	Type C 10 for axis

\* Retaining rings are included.

## Clevis Pin

Material: Carbon steel




Part no.	Applicable bore size (mm)	Dd9	L	d	l	m	t	Applicable retaining ring
CD-G02	20	8 <sup>-0.040</sup> <sub>-0.076</sub>	43.4	7.6	38.6	1.5	0.9	Type C 8 for axis
CD-G25	25	10 <sup>-0.040</sup> <sub>-0.076</sub>	48	9.6	42.6	1.55	1.15	Type C 10 for axis
CD-G03	32	12 <sup>-0.050</sup> <sub>-0.093</sub>	59.4	11.5	54	1.55	1.15	Type C 12 for axis
CD-G04	40	14 <sup>-0.050</sup> <sub>-0.093</sub>	71.4	13.4	65	2.05	1.15	Type C 14 for axis

\* Retaining rings are included.

## Rod End Nut


Material: Carbon steel




Part no.	Applicable bore size (mm)	B	C	D	d	H
NT-02	20	13	15.0	12.5	M8 x 1.25	5
NT-03	25, 32	17	19.6	16.5	M10 x 1.25	6
NT-G04	40	19	21.9	18	M14 x 1.5	8

**Auto Switch Proper Mounting Position (Detection at Stroke End) and Its Mounting Height**


**Reed auto switch**  
**D-A9□**

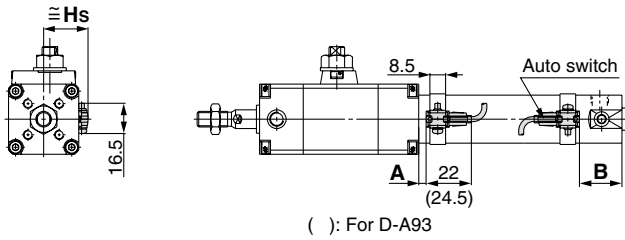


**D-C7/C8**

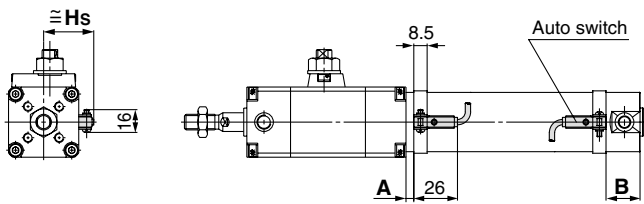


**D-C73C/C80C**

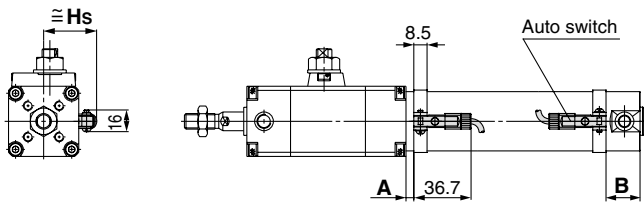


**D-B5/B6/B59W**

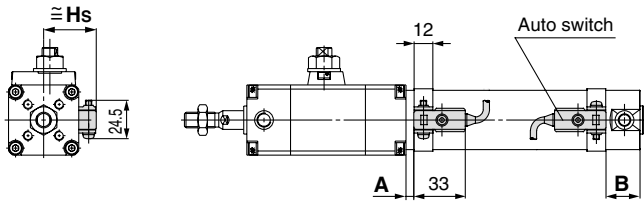


**Solid state auto switch**  
**D-M9□**  
**D-M9□W**

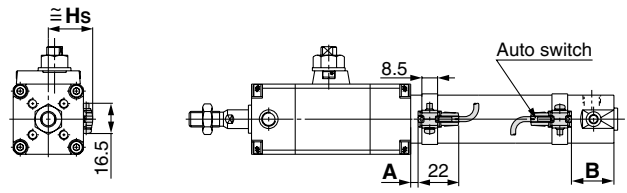


**D-G5NTL**

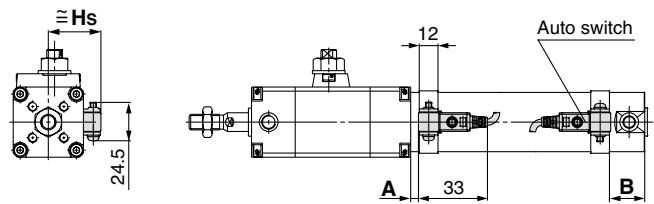

**D-H7□/H7□W**  
**D-H7NF/H7BAL**

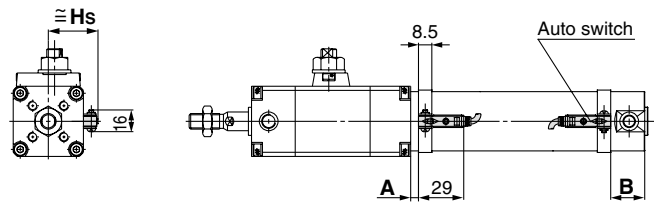

**D-H7C**

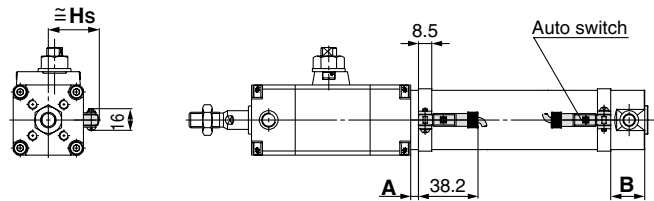

CLJ2

CLM2

CLG1

CL1

MLGC

CNG

MNB

CNA

CNS

CLS

CLQ

RLQ

MLU

MLGP

ML1C

**Auto Switch Proper Mounting Position**

Auto switch model	(mm)													
	D-A9□		D-M9□ D-M9□W		D-C7□ D-C80 D-C73C D-C80C		D-H7□ D-H7C D-H7□W D-H7BAL D-H7NF		D-B5□ D-B64		D-B59W		D-G5NTL	
	A	B	A	B	A	B	A	B	A	B	A	B	A	B
Bore size (mm)														
20	6.5	23 (31)	10.5	27 (35)	7	23.5 (31.5)	6	22.5 (30.5)	1	17.5 (25.5)	4	20.5 (28.5)	2.5	19 (27)
25	6.5	23 (31)	10.5	27 (35)	7	23.5 (31.5)	6	22.5 (30.5)	1	17.5 (25.5)	4	20.5 (28.5)	2.5	19 (27)
32	6.5	25 (33)	10.5	29 (37)	7	25.5 (33.5)	6	24.5 (32.5)	1	19.5 (27.5)	4	22.5 (30.5)	2.5	21 (29)
40	9.5	28 (37)	13.5	32 (41)	10	28.5 (37.5)	9	27.5 (36.5)	4	22.5 (31.5)	7	25.5 (34.5)	5.5	24 (33)

\* ( ): Values for long strokes

Note) Adjust the auto switch after confirming the operating conditions in the actual setting.

**Auto Switch Mounting Height**

Auto switch model	(mm)							
	D-A9□ D-M9□ D-M9□W		D-C7□ D-C80 D-H7□ D-H7□W D-H7NF D-H7BAL		D-C73C D-C80C		D-B5□ D-B64 D-B59W D-H7C D-G5NTL	
	Hs		Hs		Hs		Hs	
Bore size (mm)								
20	24		24.5		27		27.5	
25	26.5		27		29.5		30	
32	30		30.5		33		33.5	
40	34.5		35		37.5		38	

D-□

-X□

Individual  
-X□


# Series CLG1

## Minimum Auto Switch Mounting Stroke

n: No. of auto switches (mm)

Auto switch model	No. of auto switches mounted				
	1	2		n	
		Different surfaces	Same surface	Different surfaces	Same surface
D-A9□ D-M9□ D-M9□W	10	15 (Note)	45 (Note)	$15 + 45 \frac{(n-2)}{2}$ (n = 2, 4, 6...)	45 + 45 (n - 2)
D-C7□ D-C80	10	15	50	$15 + 45 \frac{(n-2)}{2}$ (n = 2, 4, 6...)	50 + 45 (n - 2)
D-H7□ D-H7□W D-H7BAL D-H7NF	10	15	60	$15 + 45 \frac{(n-2)}{2}$ (n = 2, 4, 6...)	60 + 45 (n - 2)
D-C73C D-C80C	10	15	65	$15 + 50 \frac{(n-2)}{2}$ (n = 2, 4, 6...)	65 + 50 (n - 2)
D-B5□ D-B64 D-G5NTL	10	15	75	$15 + 50 \frac{(n-2)}{2}$ (n = 2, 4, 6...)	75 + 55 (n - 2)
D-B59W	10	20	75	$20 + 50 \frac{(n-2)}{2}$ (n = 2, 4, 6...)	75 + 55 (n - 2)

Note) For cylinders with two of D-A93/M9□/M9□W auto switches

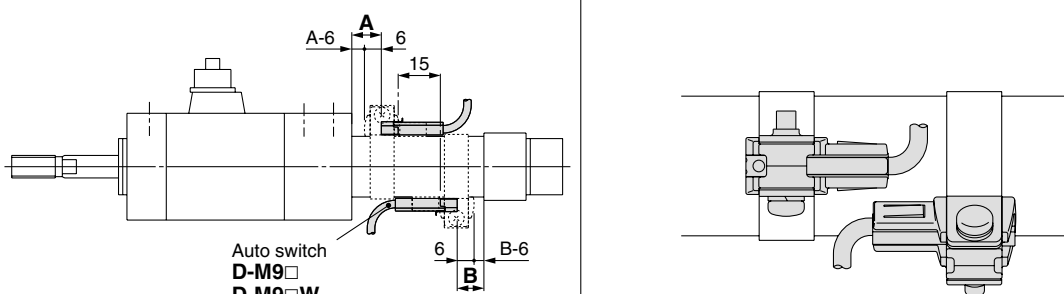Auto switch model	With 2 auto switches	
	Different surfaces	Same surface
	 <p>The proper auto switch mounting position is 6 mm inward from the switch holder edge.</p>	<p>The auto switch is mounted by slightly displacing it in a direction (cylinder tube circumferential exterior) so that the auto switch and lead wire do not interfere with</p>
D-A93	—	Less than 50 strokes
D-M9□ D-M9□W	Less than 20 strokes	Less than 55 strokes

## Operating range

Auto switch model	(mm)			
	Bore size (mm)			
	20	25	32	40
D-A9□	7	6	8	8
D-M9□ D-M9□W	4.5	5	4.5	5.5
D-C7□/C-80 D-C73C/C-80C	8	10	9	10
D-B5□/B64	8	10	9	10
D-B59W	13	13	14	14
D-H7□/H7□W D-H7BAL/H7NF	4	4	4.5	5
D-H7C	7	8.5	9	10
D-G5NTL	4	4	4.5	5
D-G5NBL	35	40	40	45

\* Since the operating range is provided as a guideline including hysteresis, it cannot be guaranteed (assuming approximately ±30% dispersion).  
It may vary substantially depending on an ambient environment.



## Auto Switch Mounting Bracket: Part No.

Auto switch model	Bore size (mm)			
	ø20	ø25	ø32	ø40
D-A9□ D-M9□ D-M9□W	(1) ① BMA2-020 ② BJ3-1	(1) ① BMA2-025 ② BJ3-1	(1) ① BMA2-032 ② BJ3-1	(1) ① BMA2-040 ② BJ3-1
D-C7□/C80 D-C73C/C80C D-H7□ D-H7□W D-H7BAL D-H7NF	BMA2-020	BMA2-025	BMA2-032	BMA2-040
D-B5□/B64 D-B59W D-G5NTL D-G5NBL	BA-01	BA-02	BA-32	BA-04

Note) Two kinds of auto switch mounting brackets are used as a set.

### [Mounting screw set made of stainless steel]


The following set of mounting screws made of stainless steel is available. Use it in accordance with the operating environment. (Please order the auto switch mounting bracket separately, since it is not included.)

BBA3: For D-B6/B6/G5/K5 types

BBA4: For D-C7/C8/H7 types

D-H7BAL/G5BAL auto switches are set on the cylinder with the stainless steel screws above when shipped. When an auto switch is shipped independently, BBA3 or BBA4 is attached.

Note 2) Refer to pages 1813 and 1814 for the details of BBA3 and BBA4.

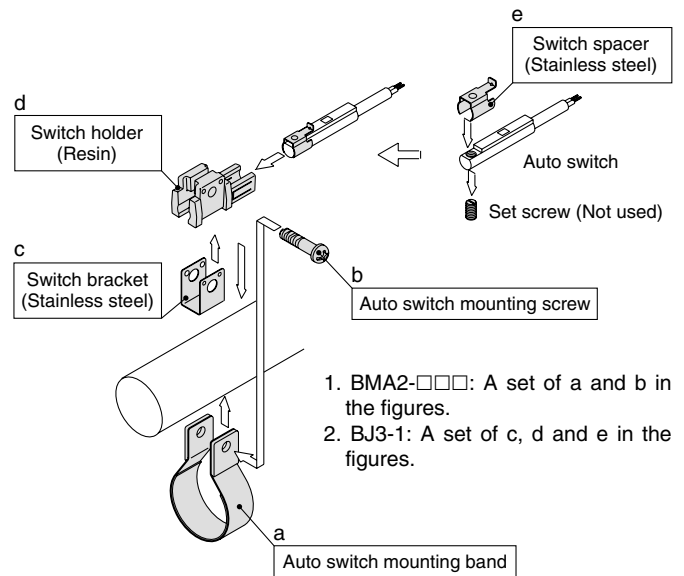

1. BMA2-□□□: A set of a and b in the figures.
2. BJ3-1: A set of c, d and e in the figures.

## Cylinder Bracket/Stroke: Auto Switch Mounting Surface

Mounting bracket	Basic, Foot, Flange, Clevis			Trunnion		
	1 (Rod cover side)	2 (Different surfaces)	2 (Same surface)	1 (Rod cover side)	2 (Different surfaces)	2 (Same surface)
No. of auto switches	1 (Rod cover side)	2 (Different surfaces)	2 (Same surface)	1 (Rod cover side)	2 (Different surfaces)	2 (Same surface)
Switch mounting surface	Port side	Port side	Port side	Port side	Port side	Port side
Switch model						
D-A9□ D-M9□ D-M9□W	10 st or more	15 to 44 st	45 st or more	10 st or more	15 to 44 st	45 st or more
D-C7□/C80	10 st or more	15 to 49 st	50 st or more	10 st or more	15 to 49 st	50 st or more
D-H7□/H7□W D-H7BAL/H7NF	10 st or more	15 to 59 st	60 st or more	10 st or more	15 to 59 st	60 st or more
D-C73C/C80C/H7C	10 st or more	15 to 64 st	65 st or more	10 st or more	15 to 64 st	65 st or more
D-B5□/B64/G5NTL	10 st or more	15 to 74 st	75 st or more	10 st or more	15 to 74 st	75 st or more
D-B59W	15 st or more	20 to 74 st	75 st or more	15 st or more	20 to 74 st	75 st or more

st: Stroke (mm)

Besides the models listed in How to Order, the following auto switches are applicable. Refer to pages 1719 to 1827 for the detailed specifications.

Auto switch type	Part no.	Electrical entry (Fetching direction)	Features	Applicable bore size
Reed	D-B53, C73, C76	Grommet (In-line)	—	ø20 to ø40
	D-C80		Without indicator light	
Solid state	D-H7A1, H7A2, H7B		—	
	D-H7NW, H7PW, H7BW		Diagnostic indication (2-color indication)	
	D-G5NTL		With timer	

\* For solid state auto switches, auto switches with a pre-wired connector are also available. Refer to pages 1784 and 1785 for details.

\* Normally closed (NC = b contact) solid state auto switches (D-F9G/F9H types) are also available. Refer to page 1746 for details.

\* Wide range detection type, solid state auto switches (D-G5NBL type) are also available. Refer to page 1776 for details.

# Lock-up Cylinder Double Acting, Single Rod Series CL1

ø40, ø50, ø63, ø80, ø100, ø125, ø140, ø160

The CL1 series lock-up cylinder is a self-locking type that contains a ring that is tilted by a spring force, which is further tilted by the load that is applied to the cylinder, thus locking the piston rod. This cylinder is suitable for intermediate stops, emergency stops, or for drop prevention.

## How to Order

**CL1 L [ ] [ ] 100 [ ] - 200 F - JN - [ ]**

**With auto switch CDL1 L [ ] [ ] 100 [ ] - 200 F - JN - M9BW [ ] - [ ]**

**With auto switch (Built-in magnet)**

**Mounting style**

<b>B</b>	Basic style	<b>C</b>	Single clevis style
<b>L</b>	Foot style	<b>D</b>	Double clevis style
<b>F</b>	Rod side flange style	<b>T</b>	Center trunnion style
<b>G</b>	Head side flange style		

**Tubing material**

Symbol	Bore size	Tubing material
Nil	ø40 to ø100	Aluminum tube
	ø125 to ø160	Aluminum tube
F*	ø40 to ø160	Steel tube

Note) Auto switches are not available with steel tube.

**Port thread type**

Nil	Rc
TN	NPT
TF	G

**Auto switch**

Nil	Without auto switch
-----	---------------------

\* For the applicable auto switch model, refer to the table below.

**Number of auto switches**

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

**With rod boot/cushion**

Rod boot	<b>J</b>	Nylon tarpaulin
	<b>K</b>	Heat resistant tarpaulin
Cushion	<b>N</b>	Without cushion
	<b>R</b>	With rod cushion
	<b>H</b>	With head cushion
	<b>Nil</b>	With cushion on both ends

**Made to Order**  
Refer to page 637 for details.

\* Indicate alphabetically when 2 or more symbols are applicable.

**Cylinder tube I.D.**

Symbol	Bore size	Symbol	Bore size
<b>40</b>	40 mm	<b>100</b>	100 mm
<b>50</b>	50 mm	<b>125</b>	125 mm
<b>63</b>	63 mm	<b>140</b>	140 mm
<b>80</b>	80 mm	<b>160</b>	160 mm

**Cylinder stroke (mm)**  
For details, refer to page 637.

**Locked-up direction**

<b>F</b>	Piston extension locking
<b>B</b>	Piston retraction locking

\* For both sides lock, refer to Made to Order "-X51".

**Built-in Magnet Cylinder Model**  
If a built-in magnet cylinder without an auto switch is required, there is no need to enter the symbol for the auto switch.  
(Example) CDL1L40-100F

## Applicable Auto Switch

Refer to pages 1719 to 1827 for further information on auto switches.


Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model				Lead wire length (m)				Pre-wired connector	Applicable load
					DC	AC	Tie-rod mounting		Band mounting		0.5 (Nil)	1 (M)	3 (L)	5 (Z)		
							ø40 to ø100	ø125 to ø160	ø40 to ø100	ø125 to ø160						
Solid state switch		Grommet	No	3-wire (NPN)	24 V	5 V, 12 V	M9N		●	●	●	○	○	IC circuit		
							M9P		●	●	●	○	○			
							M9B		●	●	●	○	○			
				2-wire		K59***		●	●	○	○					
				—		J51		●	●	○	○					
				—		100 V, 200 V		●	●	○	○					
	Diagnostic indication (2-color indication)	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	G39C		—	G39	—	—	—	—	IC circuit	Relay, PLC
							K39C		—	K39	—	—	—	—		
							M9NW		●	●	●	○	○			
							M9PW		●	●	●	○	○			
							M9BW		●	●	●	○	○			
							2-wire		K59***		●	●	○	○		
Water resistant (2-color indication)	Grommet	No	3-wire (NPN)	24 V	5 V, 12 V	M9NA		○	○	●	○	○	—			
						M9PA		○	○	●	○	○				
						M9BA		○	○	●	○	○				
			2-wire		K59***		●	●	○	○						
			3-wire (PNP)		G5PW***		●	●	○	○						
			3-wire (PNP)		G5PW***		●	●	○	○						
With diagnostic output (2-color indication)	Grommet	No	3-wire (NPN)	24 V	5 V, 12 V	M9NA		○	○	●	○	○	—			
						M9PA		○	○	●	○	○				
						M9BA		○	○	●	○	○				
			2-wire		K59***		●	●	○	○						
			4-wire (NPN)		G5BA***		—	—	●	○	○					
			2-wire (Non-polar)		G59F***		●	●	○	○						
Reed switch		Grommet	No	3-wire (NPN equivalent)	24 V	12 V	A96**		—	—	●	●	—	IC circuit	—	
							A93**		—	—	●	●	—			—
							A90**		—	—	●	●	—			—
				2-wire		A54		●	●	●	—					
				2-wire		A64		●	●	●	—					
				—		B54***		●	●	●	—					
	Diagnostic indication (2-color indication)	Grommet	Yes	3-wire (NPN equivalent)	24 V	12 V	A33C***		—	A33	—	—	—	—	PLC	
							A34C***		—	A34	—	—	—			
							A44C***		—	A44	—	—	—			
				2-wire		B64***		●	●	●	—					
				—		A59W		—	—	—	—					
				—		B59W***		●	●	●	—					

\* Lead wire length symbols: 0.5 m ..... Nil (Example) M9NW  
1 m ..... M (Example) M9NWM  
3 m ..... L (Example) M9NWL  
5 m ..... Z (Example) M9NWX

\* Solid state auto switches marked with "○" are produced upon receipt of order.  
\*\* D-A9□/A9□V cannot be mounted on ø50.  
\*\*\* The following auto switches cannot be mounted on ø125 to ø160.  
D-G39C, K39C, A3□C, A44C, G5□, K59, G5□W, K59W, G5BAL, G59F, G5NTL, B5□, B64, B59W, P4DWL.

\* Since there are other applicable auto switches than listed, refer to page 656 for details.  
\* For details about auto switches with pre-wired connector, refer to pages 1784 and 1785.  
\* D-A9□/M9□/M9□AL auto switches are shipped together (not assembled). (Only auto switch mounting brackets for the models listed above are assembled at the time of shipment.)

# Lock-up Cylinder Double Acting, Single Rod **Series CL1**

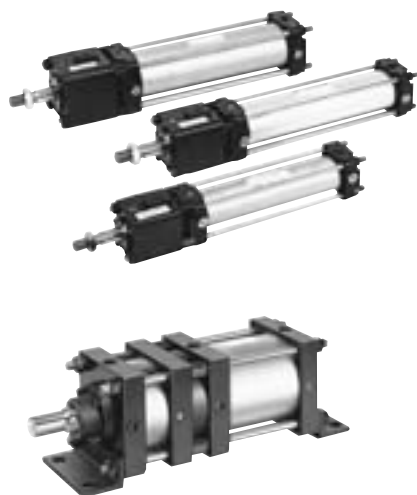

## Specifications

Bore size (mm)	ø 40 to ø 100	ø 125 to ø 160
<b>Proof pressure</b>	1.5 MPa	1.57 MPa
<b>Maximum operating pressure</b>	1.0 MPa	0.97 MPa
<b>Minimum operating pressure</b>	0.08 MPa	
<b>Piston speed</b>	50 to 200 mm/s*	
<b>Ambient and fluid temperature</b>	Without auto switch -10 to 70°C With auto switch -10 to 60°C (No freezing)	Without auto switch 0 to 70°C With auto switch 0 to 60°C (No freezing)
<b>Lubrication</b>	Non-lube	
<b>Cushion</b>	Air cushion	
<b>Stroke length tolerance</b>	Up to 250 <sup>+1.0</sup> <sub>0</sub> , 251 to 1000 <sup>+1.4</sup> <sub>0</sub> , 1001 to 1500 <sup>+1.8</sup> <sub>0</sub> , 1501 to 1600 <sup>+2.2</sup> <sub>0</sub>	
<b>Mounting</b>	Basic style, Axial foot style, Rod side flange style Head side flange style, Single clevis style Double clevis style, Center trunnion style	



\* Make sure to operate the cylinder in such a way that the piston speed does not exceed 200 mm/s during locking.

\* The maximum speed of 500 mm/s can be accommodated if the piston is to be locked in the stationary state for the purpose of drop prevention.

## Max. Load and Lock Holding Force (Max. static load)

Bore size (mm)	40	50	63	80	100	125	140	160
Max. load (N)	Horizontal Mounting	588	981	1470	2450	3820	6010	9850
	Vertical Mounting	294	490	735	1230	1910	3000	4920
Holding force (Max. static load) (N)*	1230	1920	3060	4930	7700	12100	15100	19700

\* The holding force (max. static load) indicates the maximum capability to hold a static load without loads, vibration or impact. This does not indicate a load that can be held in ordinary conditions.

The maximum load is limited depending on the mounting orientation.

Refer to the Series CL Specific Product Precautions 1 on page 596 for selecting cylinders.

Refer to the minimum auto switch mounting stroke (pages 650 and 651) for those with an auto switch.

## Cylinder Stroke (ø40 to ø100) /

Bore size (mm)	Standard stroke (mm)	Long stroke (L, F only)
<b>40</b>	25, 50, 75, 100, 125, 150, 175, 200, 250, 300, 350, 400, 450, 500	800
<b>50, 63</b>	25, 50, 75, 100, 125, 150, 175, 200, 250, 300, 350, 400, 450, 500, 600	1200
<b>80, 100</b>	25, 50, 75, 100, 125, 150, 175, 200, 250, 300, 350, 400, 450, 500, 600, 700	ø80: 1400, ø100: 1500

Note 1) Strokes other than listed above are produced upon receipt of order. Spacers are not used for intermediate strokes.

Note 2) Long strokes are applicable for the axial foot and rod side flange styles. If other mounting brackets are used or the length exceeds the long stroke limit, the maximum stroke should be determined based on the stroke selection table (technical data).

## Cylinder Stroke (ø125 to ø160)

Unit: mm

Tube material	Aluminum alloy	Carbon steel piping	
Bore size (mm)	Basic style, Head side flange style, Single clevis style, Double clevis style, Center trunnion style, Foot style, Rod side flange style	Basic style, Head side flange style, Single clevis style, Double clevis style, Center trunnion style,	Foot style, Rod side flange style
<b>125, 140</b>	Up to 1000	Up to 1000	Up to 1600
<b>160</b>	Up to 1200	Up to 1200	Up to 1600

## Cylinder Stroke/ Cylinder with Auto Switch (Built-in magnet)

Refer to the minimum auto switch mounting stroke (pages 650 and 651) for those with an auto switch.

Unit: mm

Bore size (mm)	Basic style, Head side flange style, Single clevis style, Double clevis style, Center trunnion style,	Foot style, Rod side flange style
<b>125, 140</b>	Up to 1000	Up to 1400
<b>160</b>	Up to 1200	Up to 1400



**Made to Order Specifications**  
(For details, refer to pages 1829 to 2021.)

Symbol	Specifications
—XA□	Change of rod end shape
—XC3	Special port location
—XC14	Change of trunnion bracket mounting position (ø40 to 100 only)
—X50	Large bore lock-up cylinder (ø180 to ø300)
—X51	Both-directions lock-up cylinder

## Lock-up Unit Specifications

Lock operation	Spring lock
Lock-up release pressure	0.2 MPa (at no load)
Lock-up start pressure	0.05 MPa or less
Lock-up direction	One direction (Lock direction can be changed.)

## Stopping Accuracy

(Not including tolerance of control system)

Piston speed	Bore size (mm)	
	40 to 100	125 to 160
50 mm/s	± 0.6 mm	± 1 mm
100 mm/s	± 1.2 mm	± 2 mm
200 mm/s	± 2.3 mm	± 3 mm

## Lock-up Unit Model

Applicable bore size (mm)	40	50	63	80	100
Lock-up unit part no.	CL-40	CL-50	CL-63	CL-80	CL-100

Refer to pages 650 to 656 for cylinders with auto switches.

- Minimum auto switch mounting stroke
- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range
- Switch mounting bracket: Part no.

CLJ2

CLM2

CLG1

CL1

MLGC

CNG

MNB

CNA

CNS

CLS

CLQ

RLQ

MLU

MLGP

ML1C

D-□

-X□

Individual  
-X□

# Series CL1

## Accessory

Mounting		Basic style	Foot style	Rod side flange style	Head side flange style	Single clevis style	Double clevis style	Center trunnion style
Standard products	Rod end nut *	●	●	●	●	●	●	●
	Clevis pin	—	—	—	—	—	●	—
Option	Single knuckle joint	●	●	●	●	●	●	●
	Double knuckle joint (with pin)	●	●	●	●	●	●	●
	Rod boot	●	●	●	●	●	●	●

\* ø125 to ø160: Option

## Mass

(kg)

Tubing Material		Aluminum tube							
Bore size (mm)		40	50	63	80	100	125	140	160
Locked-up unit mass		0.76	1.23	2.05	3.04	4.40	16.93	21.46	32.31
Basic mass	Basic style	1.66	2.55	4.12	6.56	9.49	30.88	38.25	55.72
	Foot style	1.83	2.75	4.42	7.36	10.43	32.21	40.83	59.09
	Rod side flange style	2.06	3.15	5.08	8.40	11.81	33.65	43.28	60.95
	Head side flange style	2.09	3.29	5.16	8.51	12.06	34.35	44.32	62.98
	Single clevis style	1.93	3.00	4.88	7.94	11.80	36.02	45.46	65.45
	Double clevis style	1.92	2.98	4.90	7.94	11.82	35.83	45.17	64.28
	Trunnion style	2.26	3.30	5.47	8.90	13.02	35.77	46.09	63.86
Additional mass per each 100 mm of stroke		0.44	0.56	0.74	1.04	1.30	1.77	1.90	2.39
Accessory bracket	Single knuckle	0.23	0.26	0.26	0.66	0.83	0.91	1.16	1.56
	Double knuckle (with pin)	0.37	0.43	0.43	0.87	1.27	1.37	1.81	2.48

## Mounting Bracket Part No.

Bore size (mm)		40	50	63	80	100	125	140	160
Foot style *	Rod side	CA-L04	CA-L05	CA-L06	CA-L08	CA-L10	CS1-L12	CS1-L14	CS1-L16
	Head side	CA1-L04	CA1-L05	CA1-L06	CA1-L08	CA1-L10			
Rod side flange style **		CA-F04	CA-F05	CA-F06	CA-F08	CA-F10	CS1-FL12	CS1-FL14	CS1-FL16
Head side flange style		CA1-F04	CA1-F05	CA1-F06	CA1-F08	CA1-F10	CS1-F12	CS1-F14	CS1-F16
Single clevis		CA1-C04	CA1-C05	CA1-C06	CA1-C08	CA1-C10	CS1-C12	CS1-C14	CS1-C16
Double clevis ***		CA1-D04	CA1-D05	CA1-D06	CA1-D08	CA1-D10	CS1-D12	CS1-D14	CS1-D16

\* When ordering foot bracket for 1 cylinder, order 1 foot bracket each for the rod side and the head side for ø40 to ø100 and 2 foot brackets for ø125 to ø160.

\*\* The ø125 to ø160 rod side flange styles use the long stroke flanges of the CS1 series.

\*\*\*Clevis pin, plain washer and cotter pin are shipped together with double clevis style.

## Rod Boot Material

Symbol	Rod boot material	Max. ambient temperature
J	Nylon tarpaulin	70°C
K	Heat resistant tarpaulin	110°C *

\* Maximum ambient temperature for the rod boot itself.

Calculation: (Example) **CL1L125-500F**


• Basic mass ..... 32.21 (ø125, Foot style)

• Additional mass .... 1.77/100 st

32.21 + 1.77/100 x 500 = 41.06 kg

\* Add the lock-up unit mass for ø40 to ø100 and ø125 to ø160 steel tubes to the cylinder unit mass of Series CA2 and CS1 listed in Best Pneumatics No. 2.

## Construction Principle

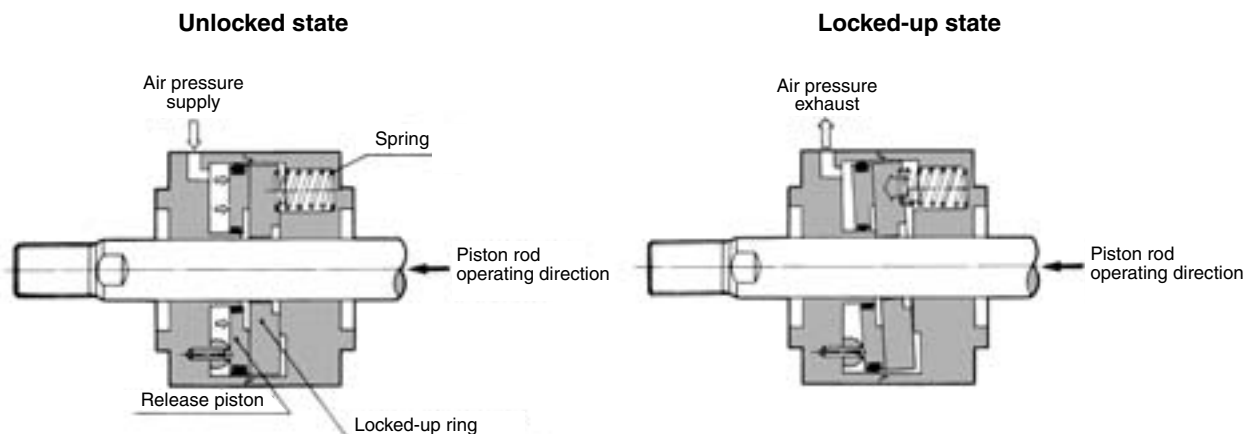


### ⚠ Caution Caution on Changing the Lock-up Direction

#### ø40 to ø100


The lock-up is unidirectional. However, the lock-up direction can be changed easily. To change the direction, pay particular attention to the following steps:

Loosening the tie-rods for the purpose of changing the direction could also loosen the nuts on the cylinder side. Therefore, before assembling the unit, make sure to verify that the nuts on the cylinder are not loose. Retighten the nuts if they are loose, and while turning the piston rod, apply a low pressure of 0.08 MPa to make sure that it operates smoothly in both the extending and retracting directions.


1. Loosen the tie-rod nuts and pull out the four tie-rods.

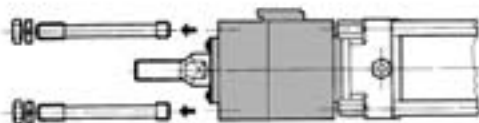

2. Open the rubber cap and screw in the unlocking bolt, which is provided as an accessory part. At this time, apply air pressure of 0.2 MPa to 0.3 MPa to disengage the lock and insert the bolt. (The operation to follow can be performed properly and easily with the application of air pressure.) After verifying that the bolt has been inserted properly, pull out the unit from the rod. Then, loosen the three screws in the scraper presser plate to remove the presser plate and the scraper. Install the scraper and the presser plate, in that order, on the opposite side.

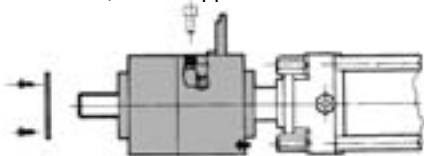


3. Turn the unit to the opposite end so that the end without the scraper is facing the cylinder rod cover. Then, securely insert the unit into the end boss portion of the rod cover.
4. Install four tie-rods, with their shorter threaded portion oriented towards the rod cover, and tighten them with uniform torque. Until the installation and adjustment have been completed, never pull out the unlocking bolt (or release the air pressure).

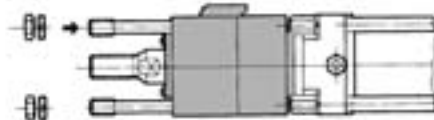


The processes described above complete the changing of the locked-up direction. Before using the cylinder, make sure that the lock-up operates properly.

#### ø125 to ø160


1. Loosen the tie-rod nuts and pull out the four tie-rods.




2. Apply air pressure of 0.2 MPa to 0.3 MPa to disengage the lock and pull out the lock-up unit from the piston rod.

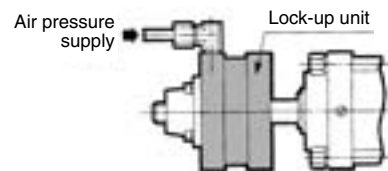

3. Remove the retainer plate from the lock-up unit and install the retainer plate on the opposite end. Reapply the air pressure, and with the end on which the retainer plate had, until now, been facing towards the cylinder, insert the locked-up unit into the piston rod and fit it into the end boss portion of the rod cover.

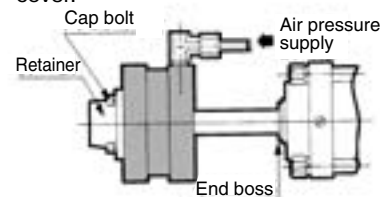

4. Install the four tie-rods, with their shorter threaded portion oriented towards the rod cover, and tighten them with uniform torque. Maintain the application of air pressure until the installation and adjustment have been completed, and never actuate the lock in the meantime.

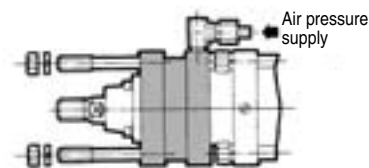

### ⚠ Caution

When the lock-up unit is not secured by the tie-rods, the air pressure applied to the lock-up port should be between 0.2 MPa and 0.3 MPa. Never supply a higher air pressure as it could lead to equipment damage.

CLJ2

CLM2

CLG1

**CL1**

MLGC

CNG

MNB

CNA

CNS

CLS

CLQ

RLQ

MLU

MLGP

ML1C

D-□


-X□

Individual  
-X□

## Manual Lock Release (ø40 to ø100)

To manually disengage the lock, perform the following steps:

1. Open the rubber cap.
2. Apply 0.2 MPa to 0.3 MPa of air pressure to the locking port, and bring the tilted ring upright.
3. Screw a bolt of an appropriate length into the ring tap.  
The bolt size is M5 for ø40 and ø50, and M6 for ø63, ø80, and ø100.



ø40 to ø100

(On cylinders ø125 to ø160, the lock cannot be disengaged manually.)

### ⚠ Caution

During installation adjustment, perform the operation by applying air pressure only to the lock-up port.

## ⚠ Caution Recommended Pneumatic Circuit/Caution on Handling

For recommended pneumatic circuit, stopping accuracy and caution on handling, refer to pages 596 to 599.

### ⚠ Caution

#### Stopping Accuracy

1. Load fluctuations during the reciprocal movement of the piston could cause the piston speed to change. A change in the piston speed could greatly increase the variance in the piston's stopping position. Therefore, perform the installation and adjustment operations so as not to create any load fluctuations during the piston's reciprocal movement, particularly just before stopping.
2. During a cushioning stroke, or when the piston is in the acceleration region following the start of its travel, there is a large change in speed. Thus, the variance in the stopping position will also be large. Therefore, to effect a step movement in which the stroke from the start of the operation to the next position is short (approximately 30 mm, although it could vary according to conditions) be aware of the possibility of being unable to attain the level of accuracy shown in the specifications column.
3. **Precautions regarding lock-up after the piston has been stopped with an external stopper:**  
To apply the lock-up after the piston has been stopped by an external stopper other than the locked-up mechanism, including stoppage by the stroke end of the cylinder, be aware of the matters described below.  
Due to the nature of the lock-up mechanism, there is an axial play of about 0.5 to 1.0 mm. Furthermore, due to pipe routing conditions, if it takes longer for the air to discharge through the lock-up port than for the balance pressure to stabilize, causing a delay in locking, the piston rod will move for an amount that is equivalent to the "play + delay".

### Piston speed over 200 mm/s (When locking)

4. Immediately before a lock stop, drop the piston speed to 200 mm/s or lower by switching the speed controller (to the bypass circuit). Then, operate the lock-up.

### ⚠ Caution

#### Caution on Handling


1. **Flushing**  
Before piping is connected, it should be thoroughly blown out with air (flushing) or washed to remove cutting chip, cutting oil and other debris from inside the pipe.
2. **The load on the piston rod**  
Use the cylinder in the state in which the load to the piston rod is always applied in the axial direction. This must be more strictly adhered to than with ordinary air cylinders. Furthermore, use a guide to control the movement of the load so as not to cause chatter or twist.
3. **A rotational force against the piston rod**  
Avoid applying a rotational force against the piston rod. In particular, the application of a rotational force must be prevented when in a lock-up state.
4. **Protecting the sliding portion of the rod**  
Use caution that no scratch or dent will be given to the slide part of the guide rod, as this could damage the seals and lead to leaks or faulty lock-up.
5. **Lubrication**  
It is not necessary to lubricate the CL series because it is the non-lube style.

### ⚠ Caution


#### Recommended Pneumatic Circuit

For recommended pneumatic circuits, refer to page 598.

1. **Operating the pneumatic circuit**  
Instead of the conventional reciprocal air cylinder circuit, use an pneumatic circuit, such as the recommended circuit, in which measures are taken to prevent the piston from lurching after the lock-up has been disengaged.
2. **Lock-up direction**  
The lock-up is unidirectional. The locking direction is in accordance with the position of the lock-up port, as shown in the figure below.

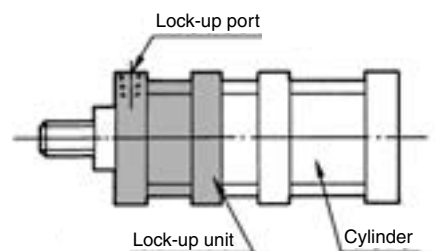

Extension locking

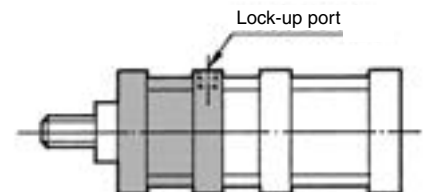

Retraction locking


ø125 to ø160

For cylinders ø40 to ø100, verify the ←(M) portion that is stamped on the cap of the lock.


3. **Maximum speed and maximum load**  
Never lock up a cylinder that involves a kinetic energy that exceeds the maximum speed or the maximum load indicated in the specifications.
4. After completing the installation adjustment, do not forget to remove the bolt that was used for disengaging the lock. (ø40 to ø100 only)

## Construction

### CL1ø40 to ø100

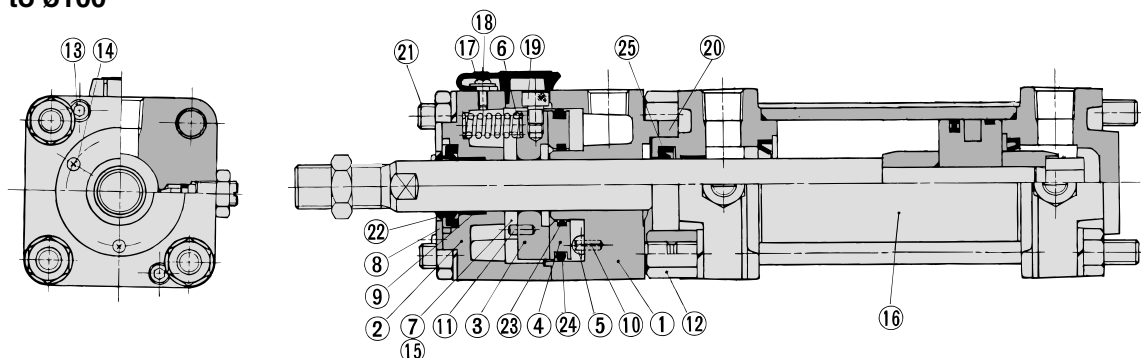

### CL1ø125 to ø160

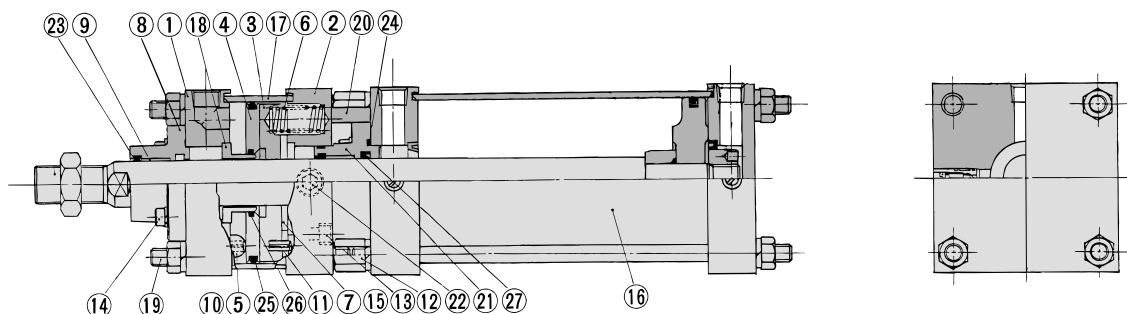

#### Component Parts: CL1ø40 to ø100

No.	Description	Material	Note
1	Body	Aluminum alloy	Black painted
2	Cover	Aluminum alloy	Black painted
3	Locked-up ring	Carbon steel	Heat treated
4	Release piston	General rolled steel	Zinc chromated
5	Pivot	Carbon steel	Heat treated, zinc chromated
6	Spring	Steel wire	Zinc chromated
7	Stopper	Urethane	
8	Retaining plate	Rolled steel	Black zinc chromated
9	Bushing	Copper alloy	
10	Spring pin	Carbon steel	JIS B 2808
11	Spring pin for non-rotating	Carbon steel	JIS B 2808
12	Wing nut	Rolled steel	Black zinc chromated
13	Unit fixing hex. socket head cap screw	Chromium molybdenum steel	
14	Retainer machine screw	Rolled steel	
15	Hexagon socket countersunk head screw	Chromium molybdenum steel	
16	Non lube air cylinder		Series CA1□N
17	Cap	Nylon	
18	Cap screw	Rolled steel	
19	Release bolt	Chromium molybdenum steel	
20	Spacer	Aluminum alloy	Black painted
21	Unit holding tie-rod	Carbon steel	Chromated
22	Scraper	NBR	
23	O-ring	NBR	
24	O-ring	NBR	
25	Rod seal	NBR	

#### Replacement Parts: Seal Kit

Bore size (mm)	Kit no.	Bore size (mm)	Kit no.
40	CL40-PS	100	CL100-PS
50	CL50-PS	125	CL125-PS
63	CL63-PS	140	CL140-PS
80	CL80-PS	160	CL160-PS

\* Since the lock section for Series CL1 is normally replaced as a unit, kits are for the cylinder section only. These can be ordered using the order number for each bore size.

\* Seal kit includes a grease pack (ø40, ø50: 10 g, ø63, ø80: 20 g, ø100: 30 g, ø125 to ø160: 40 g).

Order with the following part number when only the grease pack is needed.

Grease pack part no.: GR-S-010 (10 g), GR-S-020 (20 g)

#### Component Parts: CL1ø125 to ø160

No.	Description	Material	Note
1	Body	Rolled steel plate	Black painted
2	Cover	Rolled steel plate	Black painted
3	Locked-up ring	Carbon steel	Heat treated
4	Release piston	Rolled steel plate	Zinc chromated
5	Pivot	Carbon steel	Heat treated
6	Spring	Steel wire	Zinc chromated
7	Stopper	Urethane	
8	Retaining plate	Cast iron	Black painted
9	Bushing	Copper alloy	—
10	Spring pin	Carbon steel	JIS B 2808
11	Spring pin	Carbon steel	JIS B 2808
12	Wing nut	Rolled steel	Black zinc chromated
13	Unit fixing hex. socket head cap screw	Chromium molybdenum steel	Zinc chromated
14	Hex. socket head cap screw	Chromium molybdenum steel	Black zinc chromated
15	Hexagon socket countersunk head screw	Chromium molybdenum steel	Zinc chromated
16	Non lube air cylinder	—	Series CS1□N
17	Brake tube	Carbon steel tube	Inside: Hard chrome plated
18	Sleeve	Rolled steel	Zinc chromated
19	Unit holding tie-rod	Carbon steel	Chromated
20	Spacer	Rolled steel	Black painted
21	Retaining plate	Cast iron	Black painted
22	Element	Sintered metallic BC	—
23	Wiper ring	NBR	
24	Retaining plate gasket	NBR	
25	O-ring	NBR	
26	O-ring	NBR	
27	Rod seal	NBR	

CLJ2

CLM2

CLG1

**CL1**

MLGC

CNG

MNB

CNA

CNS

CLS

CLQ

RLQ

MLU

MLGP

ML1C

D-□

-X□


Individual  
-X□

# Series CL1

## Basic Style (B)


ø40 to ø100

Ⓐ Lock-up at piston forward Ⓑ Lock-up at piston backward

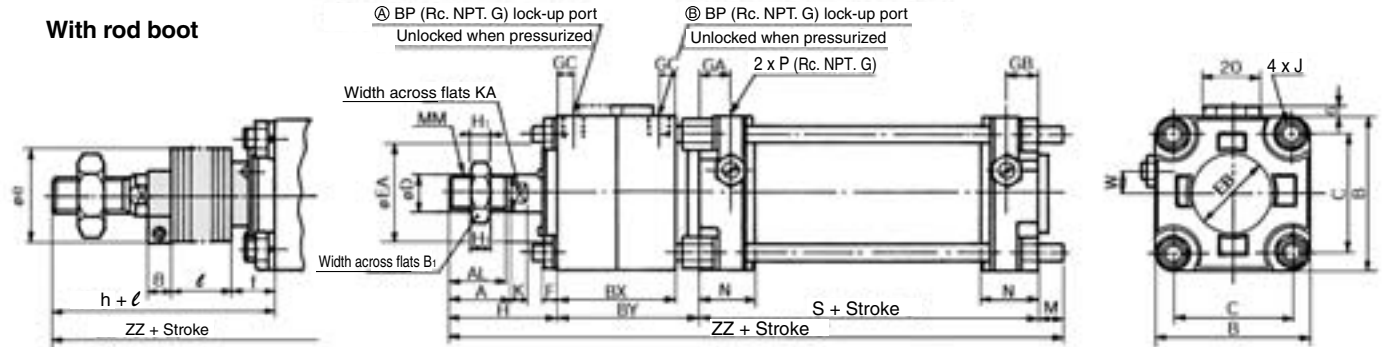

ø125 to ø160

**With rod boot**

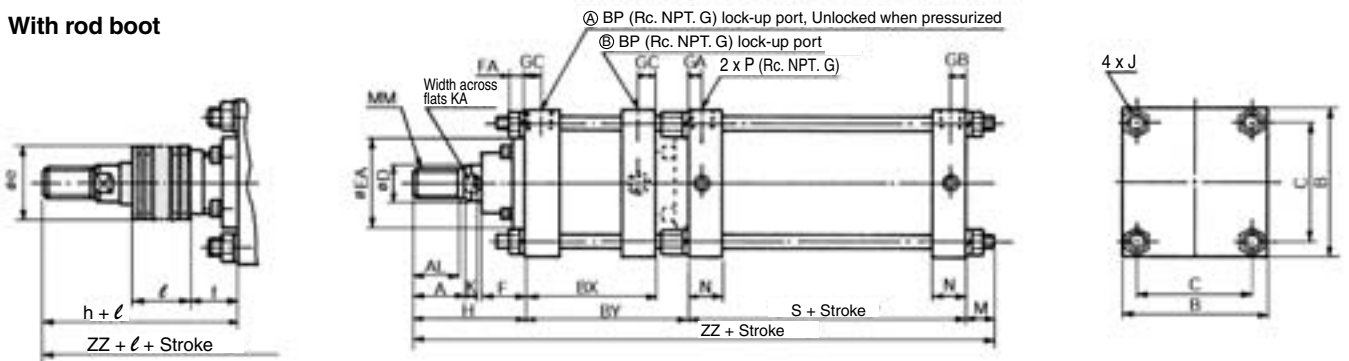

Bore size (mm)	Stroke range (mm)		(mm)																			
	Without rod boot	With rod boot	A	AL	B	B <sub>1</sub>	BX	BY	BP	C	D	EA	EB	F	FA	GA	GB	GC	H <sub>1</sub>	J	K	KA
40	Up to 500	20 to 500	30	27	60	22	59	69	¼	44	16	40	32	6.5	—	15	15	11	8	M8 x 1.25	6	14
50	Up to 600	20 to 600	35	32	70	27	67	78	¼	52	20	50	40	6.0	—	17	17	11	11	M8 x 1.25	7	18
63	Up to 600	20 to 600	35	32	86	27	73	84	¼	64	20	55	40	6.0	—	17	17	11	11	M10 x 1.25	7	18
80	Up to 750	20 to 750	40	37	102	32	77	92	¼	78	25	65	52	8.0	—	21	21	11	13	M12 x 1.75	11	22
100	Up to 750	20 to 750	40	37	116	41	85	100	¼	92	30	80	52	8.0	—	21	21	11	16	M12 x 1.75	11	26
125	Up to 1000	30 to 1000	50	47	145	—	112.5	141.5	½	115	36	90	—	43	14	16	16	16	—	M14 x 1.5	15	31
140	Up to 1000	30 to 1000	50	47	161	—	121	150	½	128	36	90	—	43	14	16	16	16	—	M14 x 1.5	15	31
160	Up to 1200	30 to 1200	56	53	182	—	133	167	¾	144	40	90	—	43	14	18.5	18.5	18.5	—	M16 x 1.5	17	36

Bore size (mm)	M	MM	N	P	S	W	Without rod boot		With rod boot				
							H	ZZ	e	f	h	ℓ	ZZ
40	11	M14 x 1.5	27	¼	84	8	51	215	36	16.5	59	¼ stroke	223
50	11	M18 x 1.5	30	⅜	90	0	58	237	45	16.0	66	¼ stroke	245
63	14	M18 x 1.5	31	⅜	98	0	58	254	45	16.0	66	¼ stroke	262
80	17	M22 x 1.5	37	½	116	0	71	296	60	18.0	80	¼ stroke	305
100	17	M26 x 1.5	40	½	126	0	72	315	60	18.0	81	¼ stroke	324
125	27	M30 x 1.5	35	½	98	—	110	376.5	75	40	133	⅓ stroke	399.5
140	27	M30 x 1.5	35	½	98	—	110	385	75	40	133	⅓ stroke	408
160	30.5	M36 x 1.5	39	¾	106	—	120	423.5	75	40	141	⅓ stroke	444.5

Note) In installing an air cylinder, if a hole must be made to accommodate the rod portion, make sure to machine a hole that is larger than the boot outer diameter "øe".




# Lock-up Cylinder Double Acting, Single Rod **Series CL1**


## Axial Foot Style (L)

ø40 to ø100

Ⓐ Lock-up at piston forward Ⓑ Lock-up at piston backward

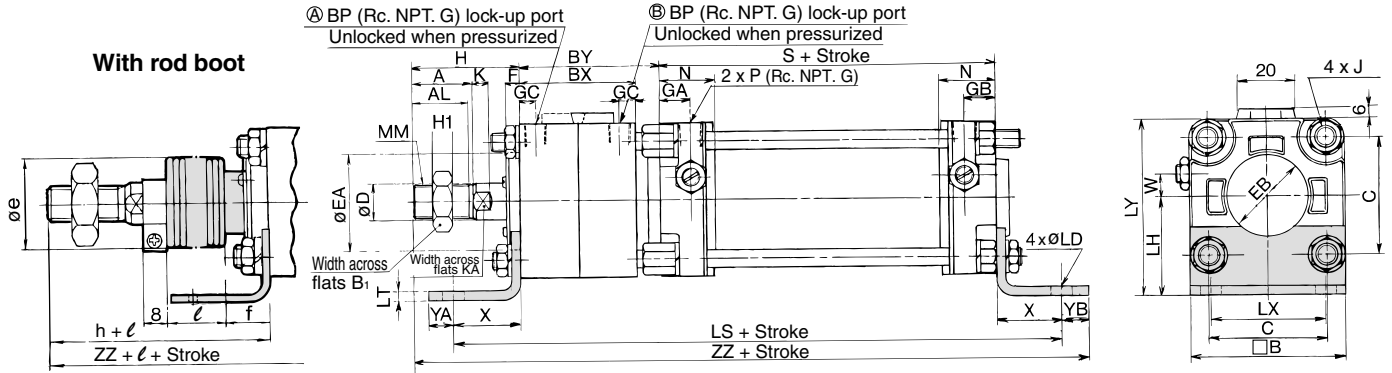


**Long stroke**  
ø50 to ø100

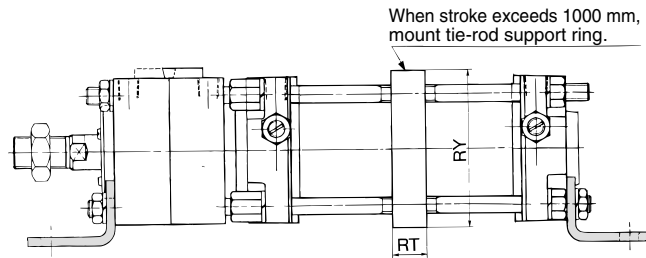

Bore size (mm)	Stroke range (mm)	RT	RY
40	501 to 800	—	—
	601 to 1000	—	—
50	1001 to 1200	30	76
	601 to 1000	—	—
63	1001 to 1200	40	92
	701 to 1000	—	—
80	1001 to 1400	45	112
	701 to 1000	—	—
100	1001 to 1500	50	136
	701 to 1000	—	—
125	1401 to 1600	36	164
140	1401 to 1600	36	184
160	1401 to 1600	40	204

ø125 to ø160

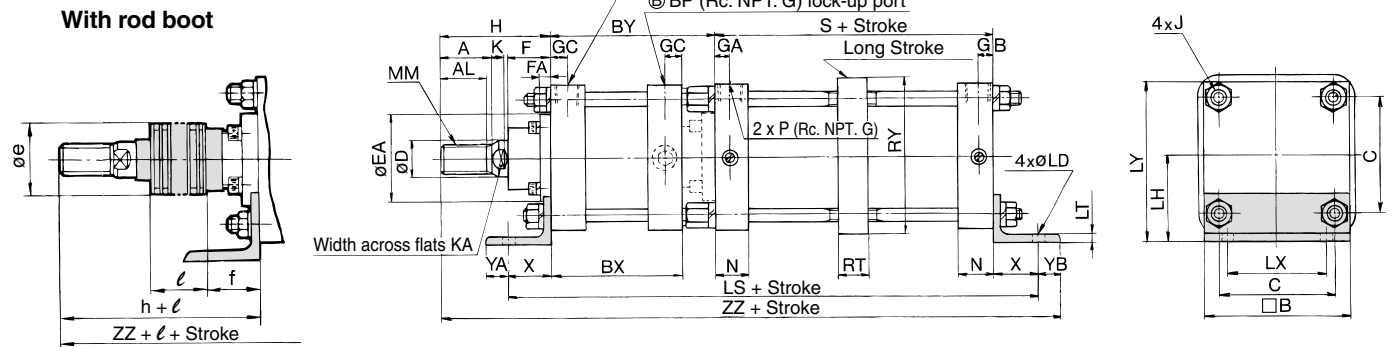

Bore size (mm)	Stroke range (mm)																							
	Without rod boot	With rod boot	A	AL	B	B <sub>1</sub>	BX	BY	BP	C	D	EA	EB	F	FA	GA	GB	GC	H <sub>1</sub>	J	K	KA	LD	LH
40	Up to 500	20 to 500	30	27	60	22	59	69	¼	44	16	40	32	6.5	—	15	15	11	8	M8 x 1.25	6	14	9	40
50	Up to 600	20 to 600	35	32	70	27	67	78	¼	52	20	50	40	6.0	—	17	17	11	11	M8 x 1.25	7	18	9	45
63	Up to 600	20 to 600	35	32	86	27	73	84	¼	64	20	55	40	6.0	—	17	17	11	11	M10 x 1.25	7	18	11.5	50
80	Up to 750	20 to 750	40	37	102	32	77	92	¼	78	25	65	52	8.0	—	21	21	11	13	M12 x 1.75	11	22	13.5	65
100	Up to 750	20 to 750	40	37	116	41	85	100	¼	92	30	80	52	8.0	—	21	21	11	16	M12 x 1.75	11	26	13.5	75
125	Up to 1400	30 to 1400	50	47	145	—	112.5	141.5	½	115	36	90	—	43	14	16	16	16	—	M14 x 1.5	15	31	19	85
140	Up to 1400	30 to 1400	50	47	161	—	121	150	½	128	36	90	—	43	14	16	16	16	—	M14 x 1.5	15	31	19	100
160	Up to 1400	30 to 1400	56	53	182	—	133	167	¾	144	40	90	—	43	14	18.5	18.5	18.5	—	M16 x 1.5	17	36	19	106

Bore size (mm)	Without rod boot		With rod boot	
	LS	LT	LX	LY
40	207	3.2	42	70
50	222	3.2	50	80
63	250	3.2	59	93
80	296	4.5	76	116
100	312	6.0	92	133
125	329.5	8	100	157.5
140	338	9	112	180.5
160	373	9	118	197

- CLJ2
- CLM2
- CLG1
- CL1**
- MLGC
- CNG
- MNB
- CNA
- CNS
- CLS
- CLQ
- RLQ
- MLU
- MLGP
- ML1C


- D-□
- X□
- Individual -X□

# Series CL1


## Head Side Flange Style (G)

ø40 to ø100

Ⓐ Lock-up at piston forward Ⓑ Lock-up at piston backward

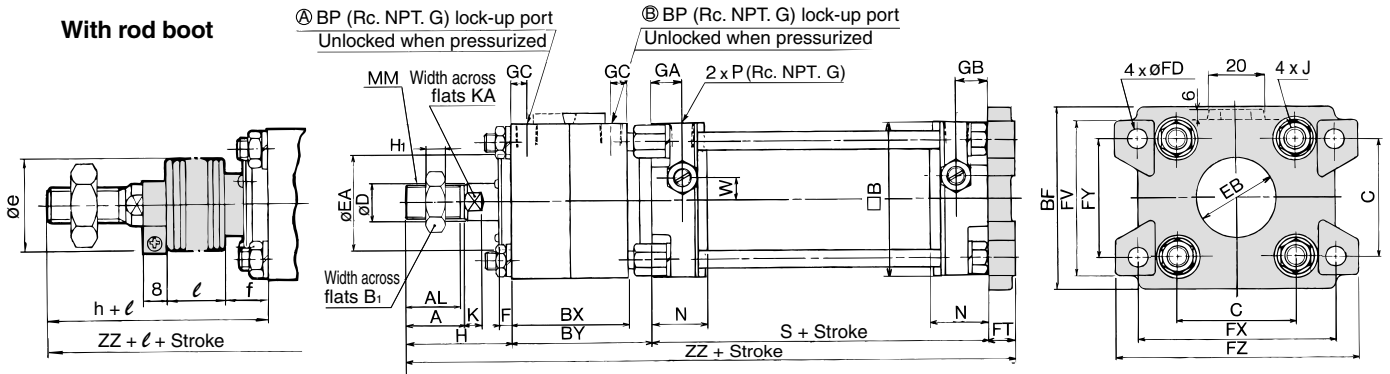

ø125 to ø160

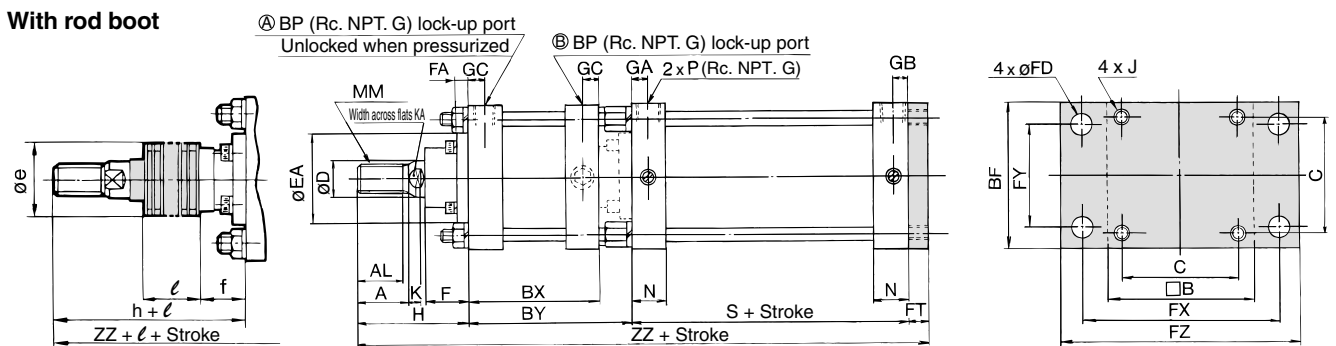

Bore size (mm)	Stroke range (mm)		A	AL	B	B <sub>1</sub>	BF	BP	BX	BY	C	D	EA	EB	F	FA	FD	FT	FX	FY	FZ	FV	GA	GB	GC	H <sub>1</sub>
	Without rod boot	With rod boot																								
40	Up to 500	20 to 500	30	27	60	22	71	1/4	59	69	44	16	40	32	6.5	—	9.0	12	80	42	100	60	15	15	11	8
50	Up to 600	20 to 600	35	32	70	27	81	1/4	67	78	52	20	50	40	6.0	—	9.0	12	90	50	110	70	17	17	11	11
63	Up to 600	20 to 600	35	32	86	27	101	1/4	73	84	64	20	55	40	6.0	—	11.5	15	105	59	130	86	17	17	11	11
80	Up to 750	20 to 750	40	37	102	32	119	1/4	77	92	78	25	65	52	8.0	—	13.5	18	130	76	160	102	21	21	11	13
100	Up to 750	20 to 750	40	37	116	41	133	1/4	85	100	92	30	80	52	8.0	—	13.5	18	150	92	180	116	21	21	11	16
125	Up to 1000	30 to 1000	50	47	145	—	145	1/2	112.5	141.5	115	36	90	—	43	14	19	14	190	100	230	—	16	16	16	—
140	Up to 1000	30 to 1000	50	47	161	—	160	1/2	121	150	128	36	90	—	43	14	19	20	212	112	255	—	16	16	16	—
160	Up to 1200	30 to 1200	56	53	182	—	180	3/4	133	167	144	40	90	—	43	14	19	20	236	118	275	—	18.5	18.5	18.5	—


Bore size (mm)	J	K	KA	MM	N	P	S	W	Without rod boot		With rod boot				
									H	ZZ	e	f	h	l	ZZ
40	M8 x 1.25	6	14	M14 x 1.5	27	1/4	84	8	51	216	36	16.5	59	1/4 stroke	224
50	M8 x 1.25	7	18	M18 x 1.5	30	3/8	90	0	58	238	45	16.0	66	1/4 stroke	246
63	M10 x 1.25	7	18	M18 x 1.5	31	3/8	98	0	58	255	45	16.0	66	1/4 stroke	263
80	M12 x 1.75	11	22	M22 x 1.5	37	1/2	116	0	71	297	60	18.0	80	1/4 stroke	306
100	M12 x 1.75	11	26	M26 x 1.5	40	1/2	126	0	72	316	60	18.0	81	1/4 stroke	325
125	M14 x 1.5	15	31	M30 x 1.5	35	1/2	98	—	110	363.5	75	40	133	1/5 stroke	366.5
140	M14 x 1.5	15	31	M30 x 1.5	35	1/2	98	—	110	378	75	40	133	1/5 stroke	401
160	M16 x 1.5	17	36	M36 x 1.5	39	3/4	106	—	120	413	75	40	141	1/5 stroke	434

# Lock-up Cylinder Double Acting, Single Rod **Series CL1**


## Rod Side Flange Style (F)

ø40 to ø100

Ⓐ Lock-up at piston forward Ⓑ Lock-up at piston backward

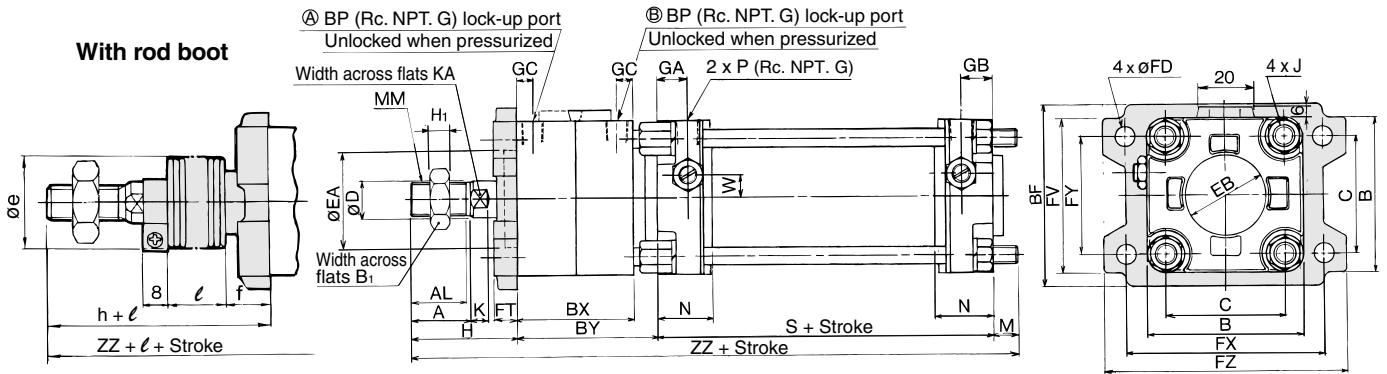

ø125 to ø160

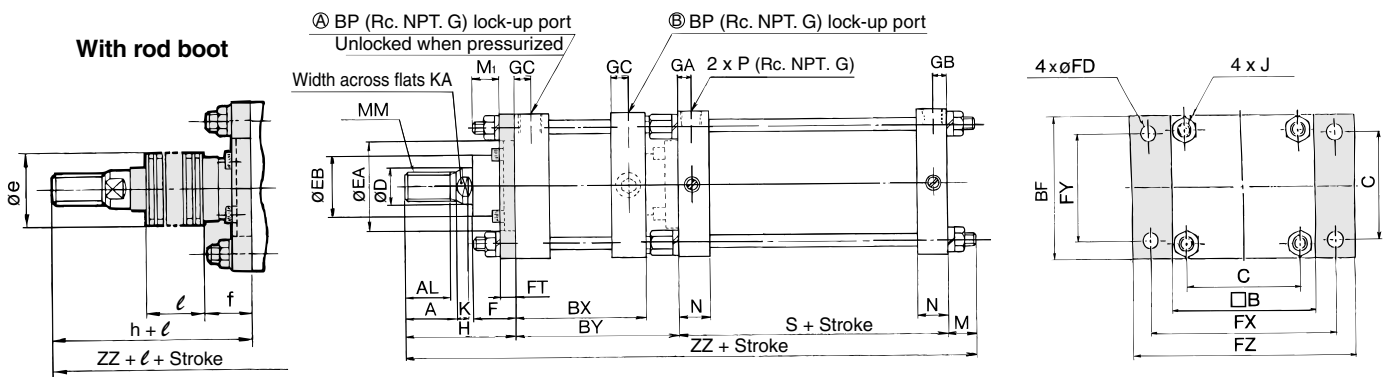

CLJ2

CLM2

CLG1

**CL1**

MLGC

CNG

MNB

CNA

CNS

CLS

CLQ

RLQ

MLU

MLGP

ML1C

Bore size (mm)	Stroke range (mm)		Long stroke range (mm)	A	AL	B	B <sub>1</sub>	BF	BP	BX	BY	C	D	EA	EB	F	FD	FT	FX	FY	FZ
	Without rod boot	With rod boot																			
40	Up to 500	20 to 500	501 to 800	30	27	60	22	71	1/4	59	69	44	16	40	32	—	9.0	12	80	42	100
50	Up to 600	20 to 600	601 to 1000	35	32	70	27	81	1/4	67	78	52	20	50	40	—	9.0	12	90	50	110
63	Up to 600	20 to 600	601 to 1000	35	32	86	27	101	1/4	73	84	64	20	55	40	—	11.5	15	105	59	130
80	Up to 750	20 to 750	751 to 1000	40	37	102	32	119	1/4	77	92	78	25	65	52	—	13.5	18	130	76	160
100	Up to 750	20 to 750	751 to 1000	40	37	116	41	133	1/4	85	100	92	30	80	52	—	13.5	18	150	92	180
125	Up to 1400	30 to 1400	—	50	47	145	—	145	1/2	112.5	141.5	115	36	90	59	43	19	14	190	100	230
140	Up to 1400	30 to 1400	—	50	47	161	—	160	1/2	121	150	128	36	90	59	43	19	20	212	112	255
160	Up to 1400	30 to 1400	—	56	53	182	—	180	3/4	133	167	144	40	90	59	43	19	20	236	118	275

Bore size (mm)	FV	GA	GB	GC	H <sub>1</sub>	J	K	KA	M	M <sub>1</sub>	MM	N	P	S	W	Without rod boot		With rod boot				
	H	ZZ	e	f	h	l	ZZ															
40	60	15	15	11	8	M8 x 1.25	6	14	11	—	M14 x 1.5	27	1/4	84	8	51	215	36	16.5	59	1/4 stroke	223
50	70	17	17	11	11	M8 x 1.25	7	18	11	—	M18 x 1.5	30	3/8	90	0	58	237	45	16.0	66	1/4 stroke	245
63	86	17	17	11	11	M10 x 1.25	7	18	14	—	M18 x 1.5	31	3/8	98	0	58	254	45	16.0	66	1/4 stroke	262
80	102	21	21	11	13	M12 x 1.75	11	22	17	—	M22 x 1.5	37	1/2	116	0	71	296	60	18.0	80	1/4 stroke	305
100	116	21	21	11	16	M12 x 1.75	11	26	17	—	M26 x 1.5	40	1/2	126	0	72	315	60	18.0	81	1/4 stroke	324
125	—	16	16	16	—	M14 x 1.5	15	31	30	22	M30 x 1.5	35	1/2	98	—	110	379.5	75	40	133	1/5 stroke	402.5
140	—	16	16	16	—	M14 x 1.5	15	31	24	19	M30 x 1.5	35	1/2	98	—	110	382	75	40	133	1/5 stroke	405
160	—	18.5	18.5	18.5	—	M16 x 1.5	17	36	26	22	M36 x 1.5	39	3/4	106	—	120	419	75	40	141	1/5 stroke	440

D-□

-X□


Individual  
-X□

# Series CL1


## Rod Side Flange Style (F)/Long Stroke

ø50 to ø100

Ⓐ Lock-up at piston forward Ⓑ Lock-up at piston backward

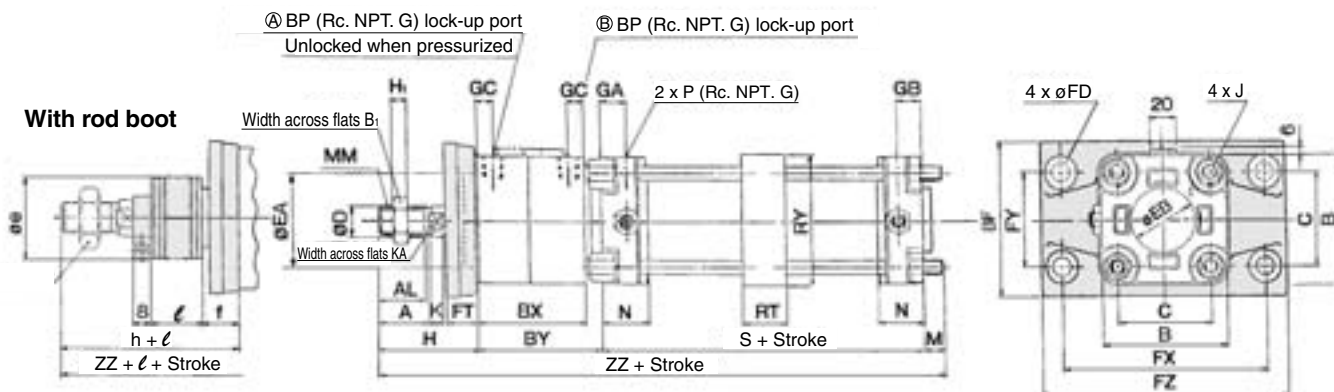

ø125 to ø160

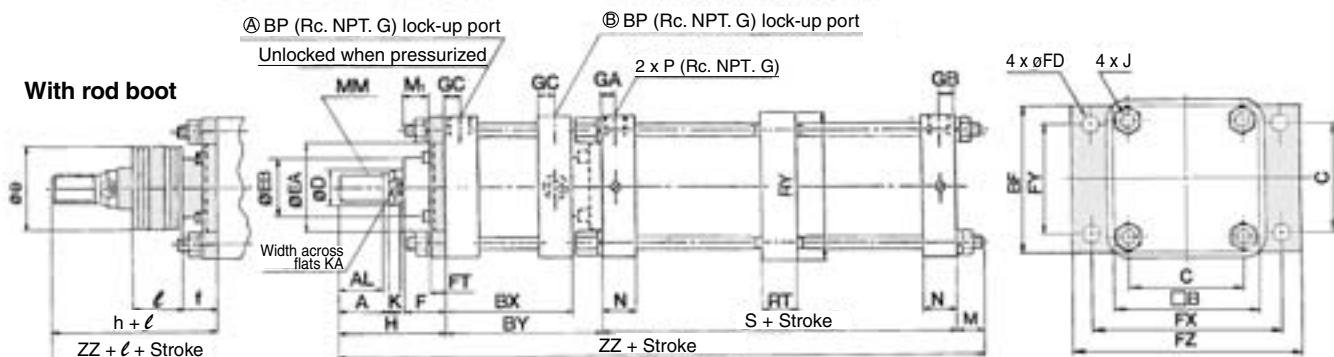

		(mm)																								
Bore size (mm)	Stroke range (mm)	A	AL	B	B <sub>1</sub>	BF	BP	BX	BY	C	D	EA	EB	F	FD	FT	FX	FY	FZ	GA	GB	GC	H <sub>1</sub>	J	K	KA
50	1001 to 1200	35	32	70	27	88	1/4	67	78	52	20	50	40	—	9.0	20	120	58	144	17	17	11	11	M8 x 1.25	7	18
63	1001 to 1200	35	32	86	27	105	1/4	73	84	64	20	55	40	—	11.5	23	140	64	170	17	17	11	11	M10 x 1.25	7	18
80	1001 to 1400	40	37	102	32	124	1/4	77	92	78	25	65	52	—	13.5	28	164	84	198	21	21	11	13	M12 x 1.75	11	22
100	1001 to 1500	40	37	116	41	140	1/4	85	100	92	30	80	52	—	13.5	29	180	100	220	21	21	11	16	M12 x 1.75	11	26
125	1401 to 1600	50	47	145	—	145	1/2	112.5	141.5	115	36	90	59	43	19	14	190	100	230	16	16	16	—	M14 x 1.5	15	31
140	1401 to 1600	50	47	161	—	160	1/2	121	150	128	36	90	59	43	19	20	212	112	255	16	16	16	—	M14 x 1.5	15	31
160	1401 to 1600	56	53	182	—	180	3/4	133	167	144	40	90	59	43	19	20	236	118	275	18.5	18.5	18.5	—	M16 x 1.5	17	36

Bore size (mm)	Stroke range (mm)	M	M <sub>1</sub>	MM	N	P	RT	RY	S	W	Without rod boot		With rod boot				
											H	ZZ	e	f	h	ℓ	ZZ
50	1001 to 1200	6	—	M18 x 1.5	30	3/8	30	76	90	0	67	241	45	16.0	66	1/4 stroke	240
63	1001 to 1200	10	—	M18 x 1.5	31	3/8	40	92	98	0	71	263	45	16.0	66	1/4 stroke	258
80	1001 to 1400	12	—	M22 x 1.5	37	1/2	45	112	116	0	87	307	60	18.0	80	1/4 stroke	300
100	1001 to 1500	12	—	M26 x 1.5	40	1/2	50	136	126	0	89	327	60	18.0	81	1/4 stroke	319
125	1401 to 1600	30	22	M30 x 1.5	35	1/2	36	164	98	—	110	379.5	75	40	133	1/5 stroke	402.5
140	1401 to 1600	24	19	M30 x 1.5	35	1/2	36	184	98	—	110	382	75	40	133	1/5 stroke	405
160	1401 to 1600	26	22	M36 x 1.5	39	3/4	45	204	106	—	120	419	75	40	141	1/5 stroke	440


Note) Bore size ø40 and bore sizes ø125 through ø160 with auto switch are not available.

# Lock-up Cylinder Double Acting, Single Rod **Series CL1**


## Single Clevis Style (C)

ø40 to ø100

Ⓐ Lock-up at piston forward Ⓑ Lock-up at piston backward

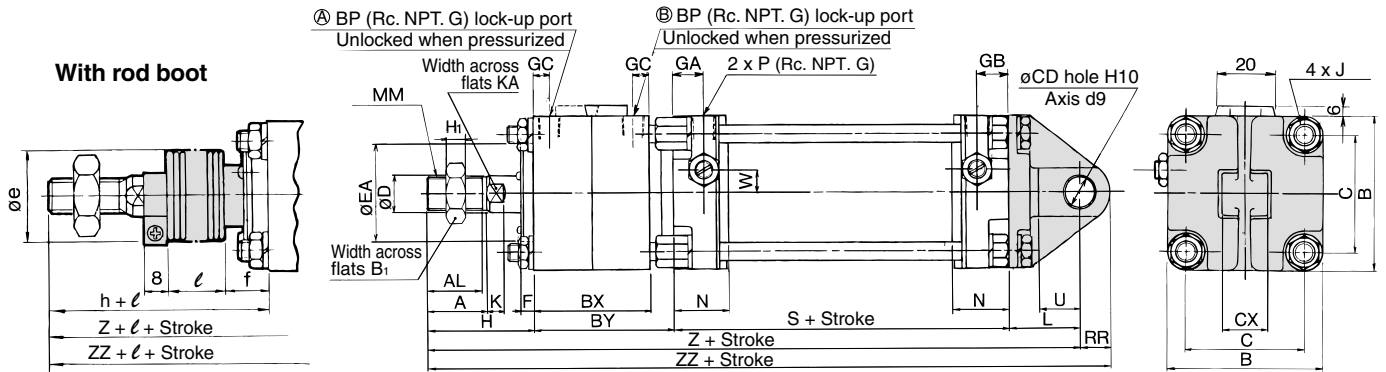

ø125 to ø160

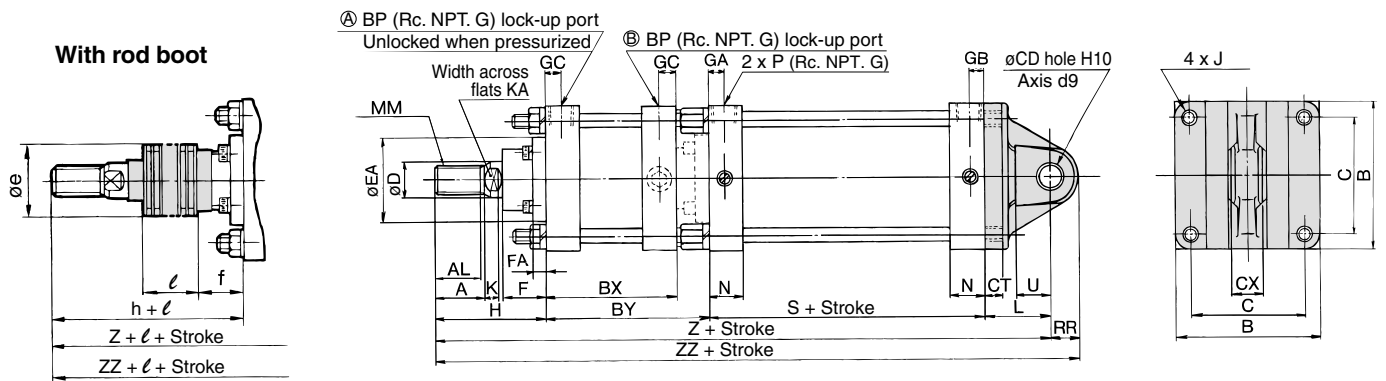

- CLJ2
- CLM2
- CLG1
- CL1**
- MLGC
- CNG
- MNB
- CNA
- CNS
- CLS
- CLQ
- RLQ
- MLU
- MLGP
- ML1C

Bore size (mm)	Stroke range (mm)		A	AL	B	B <sub>1</sub>	BP	BX	BY	C	CD	CT	CX	D	EA	F	FA	GA	GB	GC	H <sub>1</sub>
	Without rod boot	With rod boot																			
40	Up to 500	20 to 500	30	27	60	22	1/4	59	69	44	10	—	15.0 <sup>-0.1</sup> <sub>-0.3</sub>	16	40	6.5	—	15	15	11	8
50	Up to 600	20 to 600	35	32	70	27	1/4	67	78	52	12	—	18.0 <sup>-0.1</sup> <sub>-0.3</sub>	20	50	6.0	—	17	17	11	11
63	Up to 600	20 to 600	35	32	86	27	1/4	73	84	64	16	—	25.0 <sup>-0.1</sup> <sub>-0.3</sub>	20	55	6.0	—	17	17	11	11
80	Up to 700	20 to 700	40	37	102	32	1/4	77	92	78	20	—	31.5 <sup>-0.1</sup> <sub>-0.3</sub>	25	65	8.0	—	21	21	11	13
100	Up to 700	20 to 700	40	37	116	41	1/4	85	100	92	25	—	35.5 <sup>-0.1</sup> <sub>-0.3</sub>	30	80	8.0	—	21	21	11	16
125	Up to 1000	30 to 1000	50	47	145	—	1/2	112.5	141.5	115	25	17	32.0 <sup>-0.1</sup> <sub>-0.3</sub>	36	90	43	14	16	16	16	—
140	Up to 1000	30 to 1000	50	47	161	—	1/2	121	150	128	28	17	36.0 <sup>-0.1</sup> <sub>-0.3</sub>	36	90	43	14	16	16	16	—
160	Up to 1200	30 to 1200	56	53	182	—	3/4	133	167	144	32	20	40.0 <sup>-0.1</sup> <sub>-0.3</sub>	40	90	43	14	18.5	18.5	18.5	—

Bore size (mm)	J	K	KA	L	MM	N	P	RR	S	U	W	Without rod boot			With rod boot					
												H	Z	ZZ	e	f	h	ℓ	Z	ZZ
40	M8 x 1.25	6	14	30	M14 x 1.5	27	1/4	10	84	16	8	51	234	244	36	16.5	59	1/4 stroke	242	252
50	M8 x 1.25	7	18	35	M18 x 1.5	30	3/8	12	90	19	0	58	261	273	45	16.0	66	1/4 stroke	269	281
63	M10 x 1.25	7	18	40	M18 x 1.5	31	3/8	16	98	23	0	58	280	296	45	16.0	66	1/4 stroke	288	304
80	M12 x 1.75	11	22	48	M22 x 1.5	37	1/2	20	116	28	0	71	327	347	60	18.0	80	1/4 stroke	336	356
100	M12 x 1.75	11	26	58	M26 x 1.5	40	1/2	25	126	36	—	72	356	381	60	18.0	81	1/4 stroke	365	390
125	M14 x 1.5	15	31	65	M30 x 1.5	35	1/2	29	98	35	—	110	414.5	443.5	75	40	133	1/5 stroke	437.5	466.5
140	M14 x 1.5	15	31	75	M30 x 1.5	35	1/2	32	98	40	—	110	433	465	75	40	133	1/5 stroke	456	488
160	M16 x 1.5	17	36	80	M36 x 1.5	39	3/4	36	106	45	—	120	473	509	75	40	141	1/5 stroke	494	530

- D-
- X
- Individual -X




# Series CL1


## Double Clevis Style (D)

ø40 to ø100

Ⓐ Lock-up at piston forward Ⓑ Lock-up at piston backward

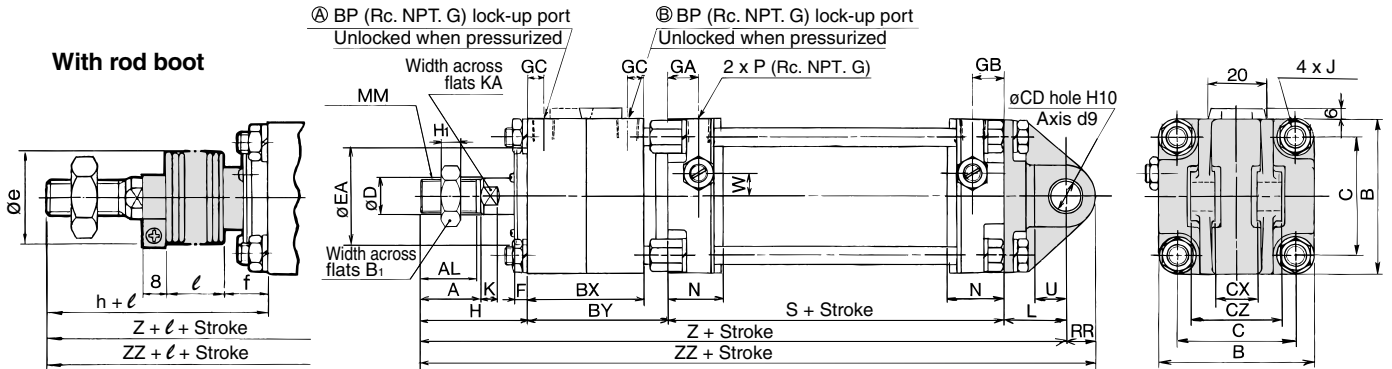

ø125 to ø160

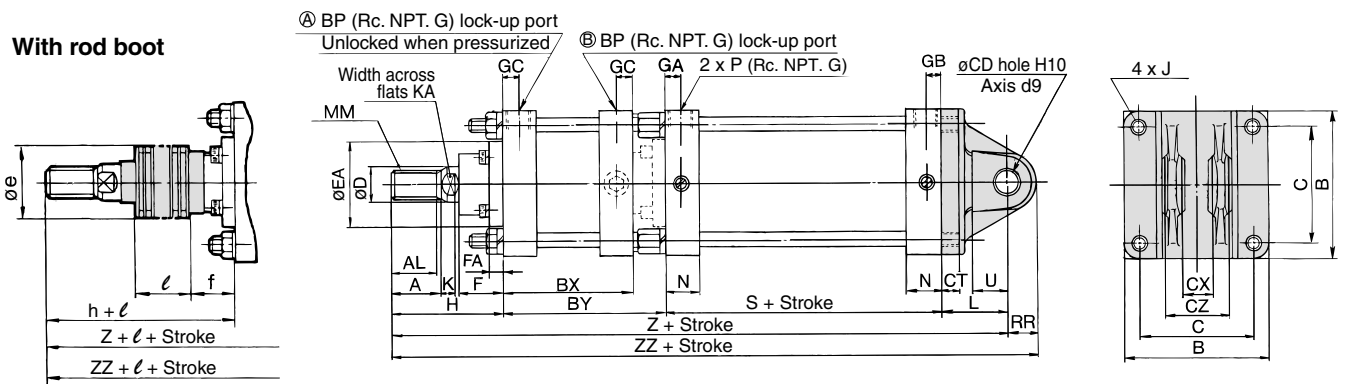

Bore size (mm)	Stroke range (mm)		A	AL	B	B <sub>1</sub>	BP	BX	BY	C	CD	CT	CX	CZ	D	EA	F	FA	GA	GB
	Without rod boot	With rod boot																		
40	Up to 500	20 to 500	30	27	60	22	1/4	59	69	44	10	—	15.0 <sup>+0.3</sup> <sub>+0.1</sub>	29.5	16	40	6.5	—	15	15
50	Up to 600	20 to 600	35	32	70	27	1/4	67	78	52	12	—	18.0 <sup>+0.3</sup> <sub>+0.1</sub>	38	20	50	6.0	—	17	17
63	Up to 600	20 to 600	35	32	86	27	1/4	73	84	64	16	—	25.0 <sup>+0.3</sup> <sub>+0.1</sub>	49	20	55	6.0	—	17	17
80	Up to 700	20 to 700	40	37	102	32	1/4	77	92	78	20	—	31.5 <sup>+0.3</sup> <sub>+0.1</sub>	61	25	65	8.0	—	21	21
100	Up to 700	20 to 700	40	37	116	41	1/4	85	100	92	25	—	35.5 <sup>+0.3</sup> <sub>+0.1</sub>	64	30	80	8.0	—	21	21
125	Up to 1000	30 to 1000	50	47	145	—	1/2	112.5	141.5	115	25	17	32.0 <sup>+0.3</sup> <sub>+0.1</sub>	64 <sup>0</sup> <sub>-0.2</sub>	36	90	43	14	16	16
140	Up to 1000	30 to 1000	50	47	161	—	1/2	121	150	128	28	17	36.0 <sup>+0.3</sup> <sub>+0.1</sub>	72 <sup>0</sup> <sub>-0.2</sub>	36	90	43	14	16	16
160	Up to 1200	30 to 1200	56	53	182	—	3/4	133	167	144	32	20	40.0 <sup>+0.3</sup> <sub>+0.1</sub>	80 <sup>0</sup> <sub>-0.2</sub>	40	90	43	14	18.5	18.5


Bore size (mm)	GC	H <sub>1</sub>	J	K	KA	L	MM	N	P	RR	S	U	W	Without rod boot			With rod boot					
														H	Z	ZZ	e	f	h	ℓ	Z	ZZ
40	11	8	M8 x 1.25	6	14	30	M14 x 1.5	27	1/4	10	84	16	8	51	234	244	36	16.5	59	1/4 stroke	242	252
50	11	11	M8 x 1.25	7	18	35	M18 x 1.5	30	3/8	12	90	19	0	58	261	273	45	16.0	66	1/4 stroke	269	281
63	11	11	M10 x 1.25	7	18	40	M18 x 1.5	31	3/8	16	98	23	0	58	280	296	45	16.0	66	1/4 stroke	288	304
80	11	13	M12 x 1.75	11	22	48	M22 x 1.5	37	1/2	20	116	28	0	71	327	347	60	18.0	80	1/4 stroke	336	356
100	11	16	M12 x 1.75	11	26	58	M26 x 1.5	40	1/2	25	126	36	0	72	356	381	60	18.0	81	1/4 stroke	365	390
125	16	—	M14 x 1.5	15	31	65	M30 x 1.5	35	1/2	29	98	35	—	110	414.5	443.5	75	40	133	1/5 stroke	437.5	466.5
140	16	—	M14 x 1.5	15	31	75	M30 x 1.5	35	1/2	32	98	40	—	110	433	465	75	40	133	1/5 stroke	456	488
160	18.5	—	M16 x 1.5	17	36	80	M36 x 1.5	39	3/4	36	106	45	—	120	473	509	75	40	141	1/5 stroke	494	530

\* Clevis pin, flat washer and cotter pin are attached.


## Center Trunnion Style (T)

ø40 to ø100

Ⓐ Lock-up at piston forward Ⓑ Lock-up at piston backward

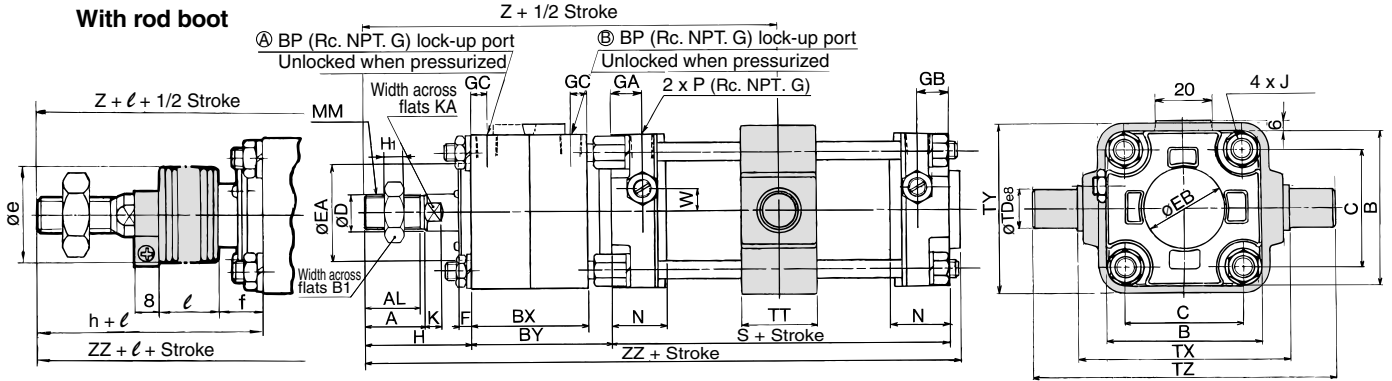

ø125 to ø160

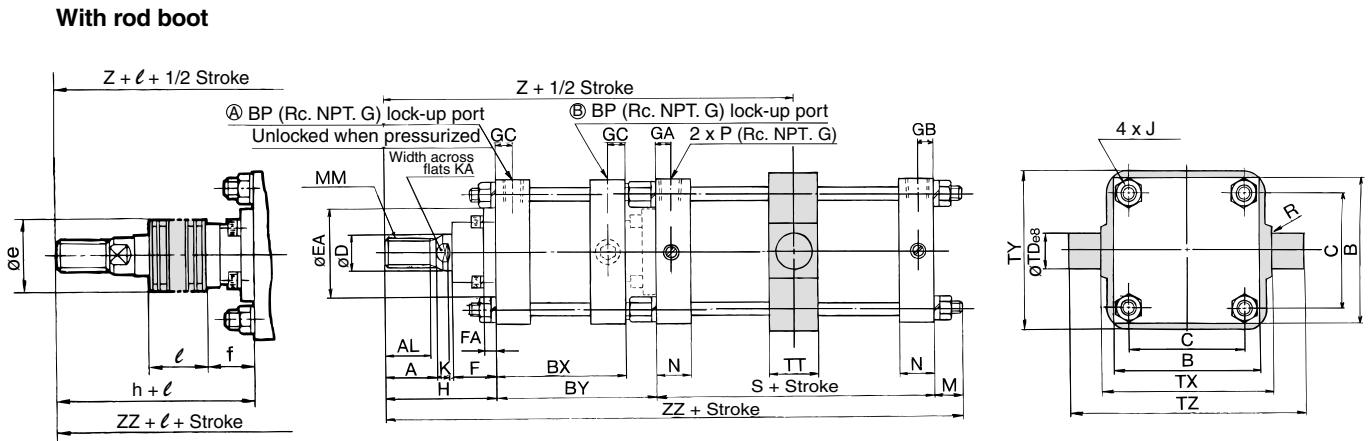

- CLJ2
- CLM2
- CLG1
- CL1**
- MLGC
- CNG
- MNB
- CNA
- CNS
- CLS
- CLQ
- RLQ
- MLU
- MLGP
- ML1C

Bore size (mm)	Stroke range (mm)																					
	Without rod boot	With rod boot	A	AL	B	B <sub>1</sub>	BP	BX	BY	C	D	EA	EB	F	FA	GA	GB	GC	H <sub>1</sub>	J	K	KA
40	Up to 500	20 to 500	30	27	60	22	1/4	59	69	44	16	40	32	6.5	—	15	15	11	8	M8 x 1.25	6	14
50	Up to 600	20 to 600	35	32	70	27	1/4	67	78	52	20	50	40	6.0	—	17	17	11	11	M8 x 1.25	7	18
63	Up to 600	20 to 600	35	32	86	27	1/4	73	84	64	20	55	40	6.0	—	17	17	11	11	M10 x 1.25	7	18
80	Up to 700	20 to 700	40	37	102	32	1/4	77	92	78	25	65	52	8.0	—	21	21	11	13	M12 x 1.75	11	22
100	Up to 700	20 to 700	40	37	116	41	1/4	85	100	92	30	80	52	8.0	—	21	21	11	16	M12 x 1.75	11	26
125	25 to 1000	30 to 1000	50	47	145	—	1/2	112.5	141.5	115	36	90	—	43	14	16	16	16	—	M14 x 1.5	15	31
140	30 to 1000	30 to 1000	50	47	161	—	1/2	121	150	128	36	90	—	43	14	16	16	16	—	M14 x 1.5	15	31
160	35 to 1200	35 to 1200	56	53	182	—	3/4	133	167	144	40	90	—	43	14	18.5	18.5	18.5	—	M16 x 1.5	17	36

Bore size (mm)	M	MM	N	P	R	S	TD <sub>e8</sub>	TT	TX	TY	TZ	W	Without rod boot			With rod boot					
													H	Z	ZZ	e	f	h	l	Z	ZZ
40	—	M14 x 1.5	27	1/4	—	84	15 <sup>-0.032/-0.059</sup>	22	85	62	117	8	51	162	209	36	16.5	59	1/4 stroke	170	217
50	—	M18 x 1.5	30	3/8	—	90	15 <sup>-0.032/-0.059</sup>	22	95	74	127	0	58	181	232	45	16.0	66	1/4 stroke	189	240
63	—	M18 x 1.5	31	3/8	—	98	18 <sup>-0.032/-0.059</sup>	28	110	90	148	0	58	191	246	45	16.0	66	1/4 stroke	199	254
80	—	M22 x 1.5	37	1/2	—	116	25 <sup>-0.040/-0.073</sup>	34	140	110	192	0	71	221	286	60	18.0	80	1/4 stroke	230	295
100	—	M26 x 1.5	40	1/2	—	126	25 <sup>-0.050/-0.089</sup>	40	162	130	214	0	72	235	306	60	18.0	81	1/4 stroke	244	315
125	19	M30 x 1.5	35	1/2	1.0	98	32 <sup>-0.050/-0.089</sup>	50	170	164	234	—	110	300.5	368.5	75	40	133	1/5 stroke	323.5	391.5
140	19	M30 x 1.5	35	1/2	1.5	98	36 <sup>-0.050/-0.089</sup>	55	190	184	262	—	110	309	377	75	40	133	1/5 stroke	332	400
160	22	M36 x 1.5	39	3/4	1.5	106	40 <sup>-0.050/-0.089</sup>	60	212	204	292	—	120	340	415	75	40	141	1/5 stroke	361	436

- D-□
- X□
- Individual
- X□

# Series CL1

## Minimum Auto Switch Mounting Stroke

### Applicable Model: CDL1 Brackets for styles other than the center trunnion style

n: No. of auto switches

Auto switch model	No. of auto switches mounted	Brackets for styles other than the center trunnion style	
		ø40 to ø100	ø125 to ø160
<b>D-M9□</b> <b>D-M9□W</b>	2 (Different surfaces, same surface) 1	15	15
	n	$15 + 40 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8 ...)	$15 + 40 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8 ...)
<b>D-M9□V</b> <b>D-M9□WV</b>	2 (Different surfaces, same surface) 1	10	10
	n	$10 + 30 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8 ...)	$10 + 30 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8 ...)
<b>D-M9□AL</b>	2 (Different surfaces, same surface) 1	15	20
	n	$15 + 40 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8 ...)	$20 + 40 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8 ...)
<b>D-M9□AVL</b>	2 (Different surfaces, same surface) 1	10	15
	n	$10 + 30 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8 ...)	$15 + 30 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8 ...)
<b>D-A9□</b>	2 (Different surfaces, same surface) 1	15	15
	n	$15 + 40 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8 ...)	$15 + 40 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8 ...)
<b>D-A9□V</b>	2 (Different surfaces, same surface) 1	10	10
	n	$10 + 30 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8 ...)	$10 + 30 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8 ...)
<b>D-F5□/J5□</b> <b>D-F5□W/J59W</b> <b>D-F5BAL/F59F</b> <b>D-A5□/A6□</b>	2 (Different surfaces, same surface) 1	15	25
	n	$15 + 55 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8 ...)	$25 + 55 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8 ...)
<b>D-F5NTL</b>	2 (Different surfaces, same surface) 1	25	35
	n	$25 + 55 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8 ...)	$35 + 55 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8 ...)
<b>D-A59W</b>	2 (Different surfaces, same surface) 1	20	25
	n	$20 + 55 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8 ...)	$25 + 55 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8 ...)
<b>D-G39</b> <b>D-K39</b> <b>D-A3□</b>	2	Different surfaces	35
		Same surface	100
	n	Different surfaces	$35 + 30(n-2)$ (n = 2, 3, 4 ...)
		Same surface	$100 + 100(n-2)$ (n = 2, 3, 4 ...)
1		10	15
<b>D-A44</b>	2	Different surfaces	35
		Same surface	55
	n	Different surfaces	$35 + 30(n-2)$ (n = 2, 3, 4 ...)
		Same surface	$55 + 50(n-2)$ (n = 2, 3, 4 ...)
1		10	15

Auto switch model	No. of auto switches mounted	Brackets for styles other than the center trunnion style	
		ø40 to ø100	ø125 to ø160
<b>D-G39C</b> <b>D-K39C</b> <b>D-A3□C</b>	2	Different surfaces	20
		Same surface	100
	n	Different surfaces	$20 + 30(n-2)$ (n = 2, 3, 4 ...)
		Same surface	$100 + 100(n-2)$ (n = 2, 3, 4 ...)
1		10	—
<b>D-A44C</b>	2	Different surfaces	20
		Same surface	55
	n	Different surfaces	$20 + 30(n-2)$ (n = 2, 3, 4 ...)
		Same surface	$55 + 50(n-2)$ (n = 2, 3, 4 ...)
1		10	—
<b>D-G5□/K59</b> <b>D-G5□W</b> <b>D-K59W</b> <b>D-G5BAL</b> <b>D-G59F</b> <b>D-G5NTL</b> <b>D-B5□/B64</b>	2	Different surfaces	15
		Same surface	75
	n	Different surfaces	$15 + 50(n-2)$ (n = 2, 4, 6, 8 ...)
		Same surface	$75 + 50(n-2)$ (n = 2, 4, 6, 8 ...)
1		10	—
<b>D-B59W</b>	2	Different surfaces	20
		Same surface	75
	n	Different surfaces	$20 + 50(n-2)$ (n = 2, 4, 6, 8 ...)
		Same surface	$75 + 50(n-2)$ (n = 2, 3, 4 ...)
1		10	—
<b>D-Y59□/Y7P</b> <b>D-Y7□W</b> <b>D-Z7□/Z80</b>	2 (Different surfaces, same surface) 1	15	
	n	$15 + 40 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8 ...)	
<b>D-Y69□/Y7PV</b> <b>D-Y7□WV</b>	2 (Different surfaces, same surface) 1	10	
	n	$10 + 30 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8 ...)	
<b>D-Y7BAL</b>	2 (Different surfaces, same surface) 1	20	
	n	$20 + 45 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8 ...)	
<b>D-P4DWL</b>	2 (Different surfaces, same surface) 1	15	—
	n	$15 + 65 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8 ...)	—

Note 1) Reed auto switches D-A9□/A9□V cannot be mounted on ø50.

Note 2) The following auto switches cannot be mounted on ø125 to ø160.

D-G39C, K39C, A3□C, A44C, G5□, K59, G5□W, K59W, G5BAL, G59F, G5NTL, B5□, B64, B59W, P4DWL.



### Minimum Auto Switch Mounting Stroke

Applicable Model: CDL1 Center trunnion style only

n: No. of auto switches

Auto switch model	No. of auto switches mounted	Center trunnion style							
		ø40	ø50	ø63	ø80	ø100	ø125	ø140	ø160
D-M9□ D-M9□W	2 (Different surfaces, same surface) 1	80		85	90	95	105	110	115
	n	$80 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)		$85 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$90 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$95 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$105 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$110 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$115 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)
D-M9□V D-M9□WV	2 (Different surfaces, same surface) 1	55		60	65	70	80	85	90
	n	$55 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)		$60 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$65 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$70 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$80 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$85 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$90 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)
D-M9□AL	2 (Different surfaces, same surface) 1	80		85	95	100	115	120	
	n	$80 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)		$85 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$95 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$100 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$115 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$120 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	
D-M9□AVL	2 (Different surfaces, same surface) 1	60		65	70	75	90	95	
	n	$60 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)		$65 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$70 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$75 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$90 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$95 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	
D-A9□	2 (Different surfaces, same surface) 1	75	—	80	85	90	100	105	110
	n	$75 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)		$80 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$85 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$90 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$100 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$105 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$110 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)
D-A9□V	2 (Different surfaces, same surface) 1	50	—	55	60	65	75	80	85
	n	$50 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)		$55 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$60 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$65 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$75 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$80 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$85 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)
D-F5□/J5□ D-F5□W/J59W D-F5BAL/F59F D-A5□/A6□	2 (Different surfaces, same surface) 1	90		100	110	120	125	135	
	n	$90 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)		$100 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$110 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$120 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$125 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$135 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	
D-F5NTL	2 (Different surfaces, same surface) 1	110		120	130	140	145	155	
	n	$110 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)		$120 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$130 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$140 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$145 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$155 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	
D-A59W	2 (Different surfaces, same surface) 1	90		100	110	120	125	135	
	n	$90 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)		$100 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$110 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$120 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$125 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$135 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	
D-G39 D-K39 D-A3□	2	Different surfaces	75	80	90			110	
		Same surface	100	100	100				
	n	Different surfaces	$75 + 30(n-2)$ (n = 2, 4, 6, 8 ...)	$80 + 30(n-2)$ (n = 2, 4, 6, 8 ...)	$90 + 30(n-2)$ (n = 2, 4, 6, 8 ...)			$110 + 30(n-2)$ (n = 2, 4, 6, 8 ...)	
		Same surface	$100 + 100(n-2)$ (n = 2, 4, 6, 8 ...)						
1		75	80	90			110		
D-A44	2	Different surfaces	75	80	90			110	
		Same surface							
	n	Different surfaces	$75 + 30(n-2)$ (n = 2, 4, 6, 8 ...)	$80 + 30(n-2)$ (n = 2, 4, 6, 8 ...)	$90 + 30(n-2)$ (n = 2, 4, 6, 8 ...)			$110 + 30(n-2)$ (n = 2, 4, 6, 8 ...)	
		Same surface	$75 + 50(n-2)$ (n = 2, 4, 6, 8 ...)	$80 + 50(n-2)$ (n = 2, 4, 6, 8 ...)	$90 + 50(n-2)$ (n = 2, 4, 6, 8 ...)			$110 + 50(n-2)$ (n = 2, 4, 6, 8 ...)	
1		75	80	90			110		

Note) Reed auto switches D-A9□/A9□V cannot be mounted on ø50.

CLJ2

CLM2

CLG1

CL1

MLGC

CNG

MNB

CNA

CNS

CLS

CLQ

RLQ

MLU

MLGP

ML1C

D-□

-X□

Individual  
-X□

# Series CL1

## Minimum Auto Switch Mounting Stroke

### Applicable Model: CDL1 Center trunnion style only

n: No. of auto switches

Auto switch model	No. of auto switches mounted	Center trunnion style						
		ø40	ø50	ø63	ø80	ø100	ø125	ø140
D-G39C D-K39C D-A3□C	2	Different surfaces	75	80	90			
		Same surface	100	100	100			
	n	Different surfaces	$75 + 35(n-2)$ (n = 2, 4, 6, 8 ...)	$80 + 35(n-2)$ (n = 2, 4, 6, 8 ...)	$90 + 35(n-2)$ (n = 2, 4, 6, 8 ...)	—	—	—
		Same surface	$100 + 100(n-2)$ (n = 2, 4, 6, 8 ...)					
1		75	80	90				
D-A44C	2	Different surfaces	75	80	90			
		Same surface						
	n	Different surfaces	$75 + 35(n-2)$ (n = 2, 4, 6, 8 ...)	$80 + 35(n-2)$ (n = 2, 4, 6, 8 ...)	$90 + 35(n-2)$ (n = 2, 4, 6, 8 ...)	—	—	—
		Same surface	$75 + 50(n-2)$ (n = 2, 4, 6, 8 ...)	$80 + 50(n-2)$ (n = 2, 4, 6, 8 ...)	$90 + 50(n-2)$ (n = 2, 4, 6, 8 ...)			
1		75	80	90				
D-G5□/K59 D-G5□W D-K59W D-G5BAL D-G59F D-G5NTL D-B5□/B64 D-B59W	2	Different surfaces	90	100	110			
		Same surface						
	n	Different surfaces	$90 + 50 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$100 + 50 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$110 + 50 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	—	—	—
		Same surface	$90 + 50(n-2)$ (n = 2, 4, 6, 8 ...)	$100 + 50(n-2)$ (n = 2, 4, 6, 8 ...)	$110 + 50(n-2)$ (n = 2, 4, 6, 8 ...)			
1		90	100	110				
D-Y59□/Y7P D-Y7□W D-Z7□/Z80	2 (Different surfaces, same surface)	80	85	90	95	105	110	115
	n	$80 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$85 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$90 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$95 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$105 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$110 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$115 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)
D-Y69□/Y7PV D-Y7□WV	2 (Different surfaces, same surface)	65	75	80	90	95	100	
	n	$65 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$75 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$80 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$90 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$95 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$100 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	
D-Y7BAL	2 (Different surfaces, same surface)	95	100	105	110	120	125	
	n	$95 + 45 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$100 + 45 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$105 + 45 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$110 + 45 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$120 + 45 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$125 + 45 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	
D-P4DWL	2 (Different surfaces, same surface)	120	130	140				
	n	$120 + 65 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$130 + 65 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	$140 + 65 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16 ...)	—	—	—	


Note) The following auto switches cannot be mounted on ø125 to ø160.

D-G39C, K39C, A3□C, A44C, G5□, K59, G5□W, K59W, G5BAL, G59F, G5NTL, B5□, B64, B59W, P4DWL.


**Auto Switch Proper Mounting Position (Detection at Stroke End) and Its Mounting Height**

<Band Mounting>  $\varnothing 40$  to  $\varnothing 100$


D-B5□/B64  
D-B59W

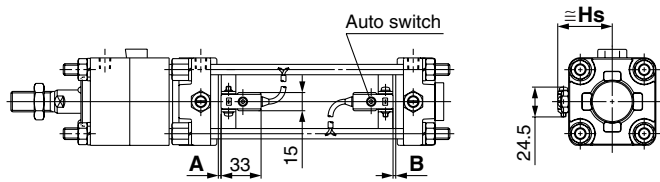


D-A3□  
D-G39/K39

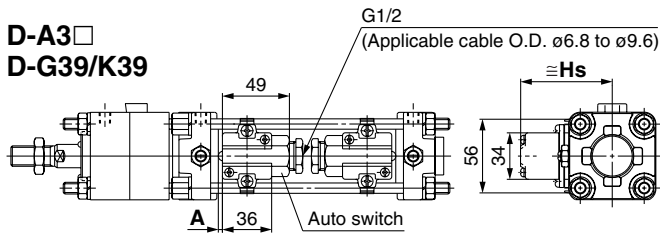

D-G5□/K59  
D-G5□W/K59W  
D-G5BAL  
D-G59F/G5NTL

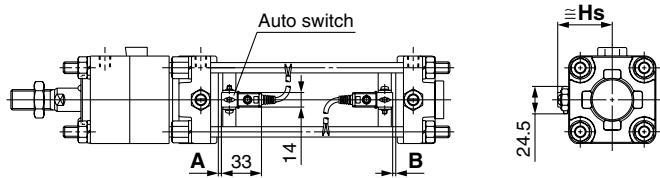


D-A44

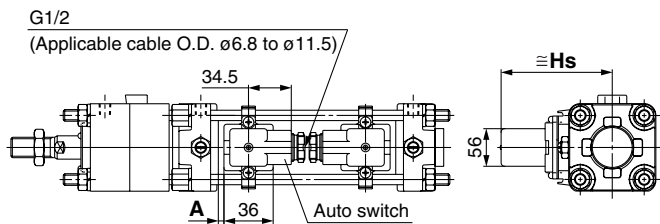


<Tie-rod Mounting>  $\varnothing 40$  to  $\varnothing 100$


D-A9□/A9□V      D-Z7□/Z80  
D-M9□/M9□V      D-Y59□/Y69□/Y7P/Y7PV  
D-M9□W/M9□WV      D-Y7□W/Y7□WV  
D-M9□AL/M9□AVL      D-Y7BAL

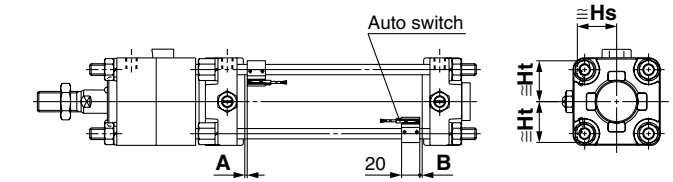


D-A5□/A6□  
D-A59W

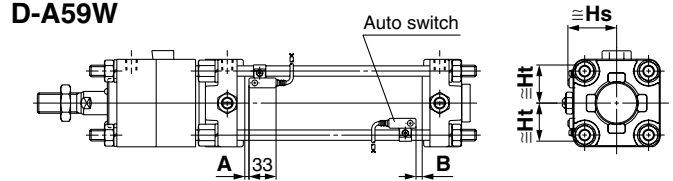


D-A3□C  
D-G39C/K39C

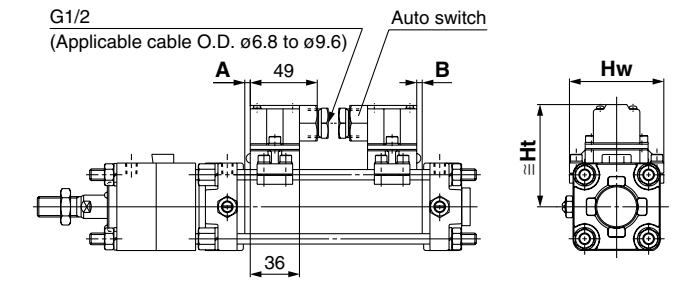


D-F5□/J5□  
D-F5NTL  
D-F5□W/J59W  
D-F5BA/F59F

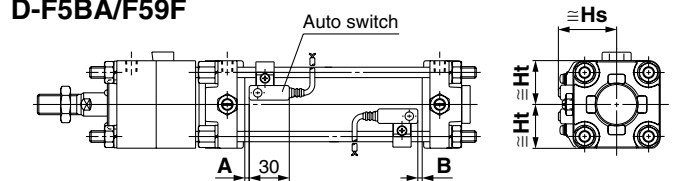

D-A44C

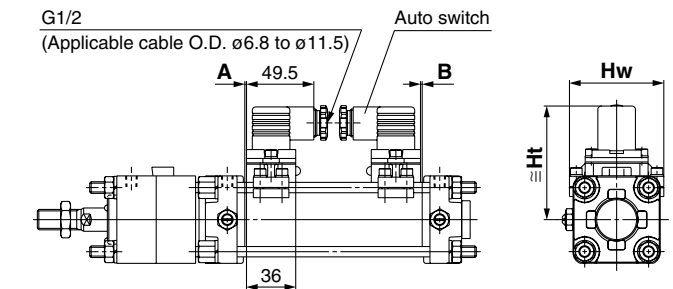

D-P4DWL

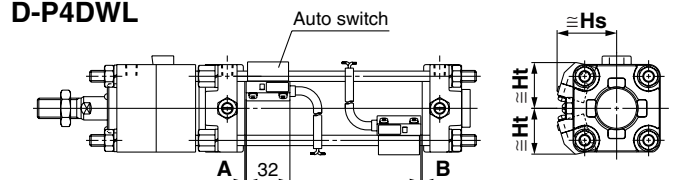

CLJ2

CLM2

CLG1

**CL1**

MLGC

CNG

MNB

CNA

CNS

CLS

CLQ

RLQ

MLU

MLGP

ML1C

D-□

-X□

Individual


-X□

# Series CL1


## Auto Switch Proper Mounting Position (Detection at Stroke End) and Its Mounting Height

### <Band Mounting> $\phi 125$ to $\phi 160$

D-A3□  
D-G39/K39

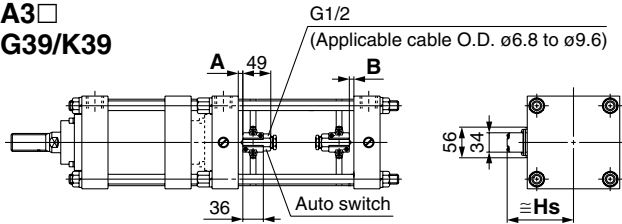


D-A44

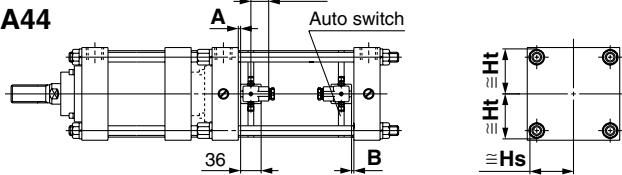


### <Tie-rod Mounting> $\phi 125$ to $\phi 160$


D-Y7□/Z80/A9□/A9□V  
D-Y59□/Y69□/Y7P/Y7PV/M9□/M9□V  
D-Y7□W/Y7□WV/F9□W/F9□WV  
D-Y7BAL/M9□AL/M9□AVL

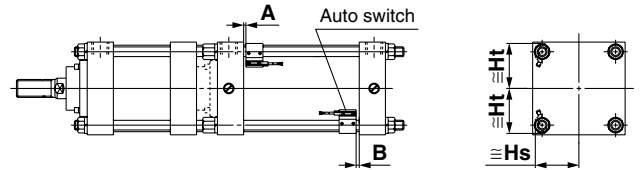

D-A5□/A6□  
D-A59W

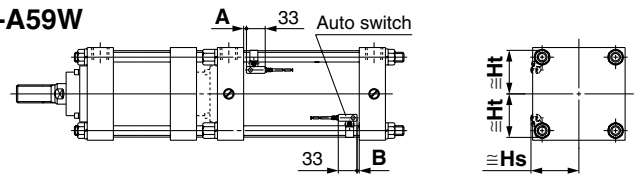

D-F5□/J5□/D-F5NTL  
D-F5□W/J59W  
D-F5BAL/F59F

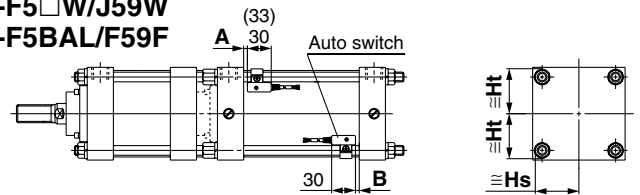

### Auto Switch Proper Mounting Position

(mm)

Auto switch model	D-M9□ D-M9□V D-M9□W D-M9□WV D-M9□AL D-M9□AVL		D-A9□ D-A9□V		D-Y59□ D-Y69□ D-Y7P D-Y7PV D-Y7□W D-Y7□WV D-Y7BAL D-Z7□ D-Z80		D-F5□ D-J5□ D-F59F D-F5□W D-J59W D-F5BAL		D-F5NTL		D-G39 D-K39 D-A3□ D-A44 D-A5□ D-A6□		D-A59W		D-P4DWL		D-G39C D-K39C D-A3□C D-A44C		D-G5□ D-K59 D-G59F D-G5□W D-K59W D-G5BAL D-G5NTL		D-B5□ D-B64		D-B59W	
	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B
40	10	8	6	4	3.5	1.5	6.5	4.5	11.5	9.5	0	0	4	2	3	1	0	0	2	0	0.5	0	3.5	1.5
50	10	8	6	4	3.5	1.5	6.5	4.5	11.5	9.5	0	0	4	2	3	1	0	0	2	0	0.5	0	3.5	1.5
63	12.5	11.5	8.5	7.5	6	5	9	8	14	13	2.5	1.5	6.5	5.5	5.5	4	2.5	1.5	4.5	3.5	3	2	6	5
80	16	14	12	10	9.5	7.5	4	10.5	17.5	15.5	6	4	10	8	9	7	6	4	8	6	6.5	4.5	9.5	7.5
100	17.5	16.5	13.5	12.5	11	10	14	13	19	18	7.5	6.5	11.5	10.5	10.5	9	7.5	6.5	9.5	8.5	8	7	11	10
125	8	8	4	4	1.5	1.5	4.5	4.5	9.5	9.5	0	0	2	2	—	—	—	—	—	—	—	—	—	—
140	8	8	4	4	1.5	1.5	4.5	4.5	9.5	9.5	0	0	2	2	—	—	—	—	—	—	—	—	—	—
160	8	8	4	4	1.5	1.5	4.5	4.5	9.5	9.5	0	0	2	2	—	—	—	—	—	—	—	—	—	—

Note 1) Adjust the auto switch after confirming the operating conditions in the actual setting.

### Auto Switch Mounting Height

(mm)

Auto switch model	D-M9□ D-M9□W D-M9□AL D-A9□		D-M9□V D-M9□WV D-M9□AVL		D-A9□V		D-Y59□ D-Y7P D-Y7□W D-Y7BAL D-Z7□ D-Z80		D-Y69□ D-Y7PV D-Y7□WV		D-F5□ D-J5□ D-F59F D-F5□W D-J59W D-F5BAL D-F5NTL		D-A5□ D-A6□ D-A59W		D-G39 D-K39 D-A3□		D-A44		D-P4DWL		D-G39C D-K39C D-A3□C		D-A44C		D-G5□ D-K59 D-G59F D-G5□W D-K59W D-G5BAL D-G5NTL D-B5□ D-B64 D-B59W	
	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Hs	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht
40	30	30	35	30	32	30	30	30	30.5	30	38.5	31	40	31	72.5	80.5	43	33.5	73	69	81	69	38	—	—	—
50	34	34	39	34	36.5	34	34	34	35	34	42.5	35	43.5	35	78	86	47	38	78.5	77	86.5	77	43.5	—	—	—
63	41	41	46	41	43.5	41	41	41	42.5	41	48	42	49	42	85	93	53	44	85.5	91	93.5	91	50.5	—	—	—
80	49.5	49	54	49	51.5	49	49.5	48.5	51	48.5	54	50	55.5	50	93.5	101.5	60	52	94	107	102	107	59	—	—	—
100	57	56	62.5	56	59.5	56	58.5	56	59	56	62	57.5	63	57.5	104	112	67	59	104	121	112	121	69.5	—	—	—
125	69	69.5	71.5	69.5	69	69.5	69	69.5	69	69.5	74.5	70	75.5	69.5	116	126	—	—	—	—	—	—	—	—	—	—
140	76	76	77.5	76	76	76	76	76	76	76	80	76.5	81	76.5	124	134	—	—	—	—	—	—	—	—	—	—
160	85	85	86	85	85	85	85	85	85	85	88	87.5	89	87.5	134.5	144.5	—	—	—	—	—	—	—	—	—	—

Note 2) D-A9□/A9□V cannot be mounted on  $\phi 50$ .

Note 3) The following auto switches cannot be mounted on  $\phi 125$  to  $\phi 160$ .

D-G39C, K39C, A3□C, A44C, G5□, K59, G5□W, K59W, G5BAL, G59F, G5NTL, B5□, B64, B59W, P4DWL.

## Operating range

Auto switch model	Bore size (mm)							
	40	50	63	80	100	125	140	160
D-M9□/M9□V D-M9□W/M9□WV D-M9□AL/M9□AVL	4.5	5	5.5	5	6	7	6.5	6.5
D-Y59□/Y69□ D-Y7P/Y7□V D-Y7□W/Y7□WV D-Y7BAL	8	7	5.5	6.5	6.5	12	13	7
D-F5□/J5□/F59F D-F5□W/J59W D-F5BAL/F5NTL	4	4	4.5	4.5	4.5	5	5	5.5
D-G5□/K59/G59F D-G5□W/K59W D-G5BAL/G5NTL	5	6	6.5	6.5	7	—	—	—
D-G39/K39 D-G39C/K39C	9	9	10	10	11	11	11	10
D-P4DWL	4	4	4.5	4	4.5	—	—	—
D-A9□/A9□V	7	—	9	9	9	12	12.5	11.5
D-Z7□/Z80	8	7	9	9.5	10.5	14	14.5	13
D-A3□/A44 D-A3□C/A44C	9	10	11	11	11	10	10	10
D-A5□/A6□ D-B5□/B64						—	—	—
D-A59W						10	10	10
D-B59W						—	—	—
D-A59W	13	13	14	14	15	17	17	17
D-B59W	14	14	17	16	18	—	—	—

Note 1) D-A9□/A9□V cannot be mounted on ø50.

Note 2) The following auto switches cannot be mounted on ø125 to ø160.


D-G39C, K39C, A3□C, A44C, G5□, K59, G5□W, K59W, G5BAL, G59F, G5NTL, B5□, B64, B59W, P4DWL.

\* Since the operating range is provided as a guideline including hysteresis, it cannot be guaranteed (assuming approximately ±30% dispersion). It may vary substantially depending on an ambient environment.

## Auto Switch Mounting Bracket: Part No.

### <Tie-rod Mounting>

Auto switch	Bore size (mm)							
	ø40	ø50	ø63	ø80	ø100	ø125	ø140	ø160
D-M9□/M9□V D-M9□W/M9□WV D-M9□AL/M9□AVL D-A9□/A9□V	BA7-040	BA7-040 (1)	BA7-063	BA7-080	BA7-080	BS5-125	BS5-125	BS5-125
D-F5□/J5□ D-F5□W/J59W D-F5BAL/F59F/F5NTL D-A5□/A6/A59W	BT-04	BT-04	BT-06	BT-08	BT-08	BT-12	BT-12	BT-16
D-G39C/K39C D-A3□C/A44C (2), (3)	BA3-040	BA3-050	BA3-063	BA3-080	BA3-100	—	—	—
D-Y59□/Y7P/Y7□W D-Y69□/Y7PV/Y7□WV D-Y7BAL D-Z7□/Z80	BA4-040	BA4-040	BA4-063	BA4-080	BA4-080	BS4-125	BS4-125	BS4-160
D-P4DWL (2)	BAP2-040	BAP2-040	BAP2-063	BAP2-080	BAP2-080	—	—	—

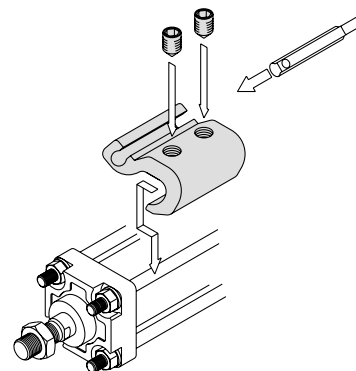

• The above figures show the mounting example of D-A9□(V)/M9□(V)/M9□W(V)/M9□A(V)L.

### <Band Mounting>

Auto switch	Bore size (mm)							
	ø40	ø50	ø63	ø80	ø100	ø125	ø140	ø160
D-G39/K39 D-A3□/A44	BD1-04M	BD1-05M	BD1-06M	BD1-08M	BD1-10M	BS1-125	BS1-140	BS1-160
D-G5□/K59 D-G5□W/K59W D-G5BAL/G59F/G5NTL D-B5□/B64/B59W (2)	BA-04	BA-05	BA-06	BA-08	BA-10	—	—	—

Note 1) D-A9□/A9□V cannot be mounted on ø50.

Note 2) The following auto switches cannot be mounted on ø125 to ø160.  
D-G39C, K39C, A3□C, A44C, G5□, K59, G5□W, K59W, G5BAL, G59F, G5NTL, B5□, B64, B59W, P4DWL.

Note 3) Auto switch mounting brackets are attached to D-G39C/K39C/A3□C/A44C. When ordering, specify the part number as follows depending on the cylinder size.

(Example) ø40: D-A3□C-4, ø50: D-A3□C-5  
ø63: D-A3□C-6, ø80: D-A3□C-8  
ø100: D-A3□C-10

If auto switch mounting brackets are necessary, order them with the part numbers above.

Note 4) Cylinder tube thickness varies depending on the cylinder style. Take precautions when cylinder styles change when band mounting type auto switches are used.

### [Mounting screw set made of stainless steel]

The following set of mounting screws made of stainless steel is available. Use it in accordance with the operating environment.  
(Please order the auto switch mounting bracket separately, since it is not included.)

BBA1: For D-F5/J5/A5/A6 types  
BBA3: For D-G5/K5/B5/B6 types

Note 5) Refer to pages 1813 and 1821 for the details of BBA1 and BBA3.  
D-F5BAL/G5BAL auto switches are set on the cylinder with the stainless steel screws above when shipped. When an auto switch is shipped independently, BBA1 or BBA3 is attached.

Note 6) When using D-M9□A(V)L/Y7BAL, do not use the steel set screws which is included with the auto switch mounting brackets above (BA7-□□□, BA4-□□□, BS5-□□□, BS4-□□□). Order a stainless steel screw set (BBA1) separately, and select and use the M4 x 6L stainless steel set screws included in the BBA1.

- CLJ2
- CLM2
- CLG1
- CL1**
- MLGC
- CNG
- MNB
- CNA
- CNS
- CLS
- CLQ
- RLQ
- MLU
- MLGP
- ML1C

- D-□
- X□
- Individual -X□

# Series CL1

Besides the models listed in How to Order, the following auto switches are applicable.  
Refer to pages 1719 to 1827 for the detailed specifications.

Auto switch type	Part no.	Electrical entry (Feiching direction)	Features	Applicable bore size
<b>Solid state</b>	D-M9NV, M9PV, M9BV	Grommet (Perpendicular)	—	ø40 to ø160
	D-Y69A, Y69B, Y7PV		Diagnostic indication (2-color indication)	
	D-M9NWV, M9PWV, M9BWV			
	D-Y7NWV, Y7PWV, Y7BWV			
	D-M9NAVL, M9PAVL, M9BAVL		Grommet (In-line)	
	D-Y59A, Y59B, Y7P	—		
	D-F59, F5P, J59	Diagnostic indication (2-color indication)		
	D-Y7NW, Y7PW, Y7BW			
	D-F59W, F5PW, J59W			
	D-F5BAL, Y7BAL	Water resistant (2-color indication)		
	D-F5NTL	With timer		
	D-G5NTL	Magnetic field resistant (2-color indication)		
	D-P5DWL			
	<b>Reed</b>	D-A93V, A96V	Grommet (Perpendicular)	—
D-A90V		Grommet (In-line)	Without indicator light	
D-A67, Z80				
D-A53, A56, Z73, Z76			—	
D-B53				ø40 to ø100

\* For solid state auto switches, auto switches with a pre-wired connector are also available. Refer to pages 1784 and 1785 for details.

\* Normally closed (NC = b contact) solid state auto switches (D-F9G/F9H/Y7G/Y7H types) are also available. Refer to pages 1746 and 1748 for details.

\* Wide range detection type, solid state auto switches (D-G5NBL type) are also available. Refer to page 1776 for details.